


DuraPlus®

All-fuel, triple-wall
chimney system.

UL 103 HT.



Elbow Kit

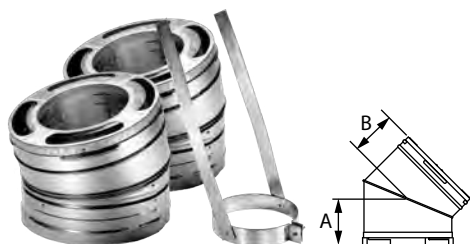


Kit includes: (2) elbows and one Elbow Strap.

Use for offsets around obstructions such as rafters, ridgepoles, or joists. May have two pairs of elbows, if needed. Offsets greater than 30° are not permitted in accordance to UL 103 standards. Elbows swivel 360° at base (angles are not adjustable). A pair of elbows is required to return an offset chimney back to vertical. Available in stainless steel (KSS) or galvalume (K) outer wall.

15°		6"	7"	8"
A		4"	4 1/4"	4 1/4"
B		3 3/4"	4 1/8"	4 1/4"
GA	ORDER #	6DP-E15K	7DP-E15K	8DP-E15K
	STOCK #	810000525	810000572	810000611
SS	ORDER #	6DP-E15KSS	7DP-E15KSS	8DP-E15KSS
	STOCK #	810000526	810000573	810000612
30°		6"	7"	8"
A		4 1/2"	4 5/8"	5"
B		4 3/4"	4 3/4"	4 3/4"
GA	ORDER #	6DP-E30K	7DP-E30K	8DP-E30K
	STOCK #	810000527	810000574	810000613
SS	ORDER #	6DP-E30KSS	7DP-E30KSS	8DP-E30KSS
	STOCK #	810000528	810000575	810000614

Elbow Strap


updated illustration

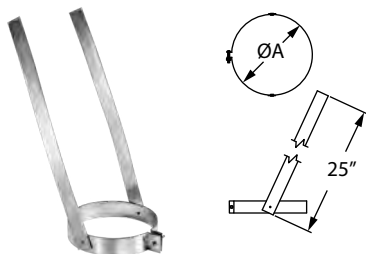

Use to prevent excessive weight on the elbows by supporting the weight of the chimney. Required to be installed between two elbows in offset installations. Multiple elbow straps may be required for offset installations. Refer to installation instructions.

SIZE	6"	7"	8"
A	10"	11"	12"
ORDER #	6DP-ES	7DP-ES	8DP-ES
STOCK #	810000529	810000576	810000615

Round Ceiling Support

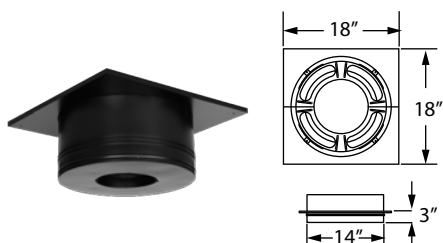

Supports chimney pipe and provides a positive connection between support box and chimney with a built-in twist-lock. Supports up to 35' of DuraPlus Chimney. Use adapter to attach DVL or DuraBlack to the support box. Painted black. Trim collar included. (For adapters see DVL and DuraBlack section.)

SIZE	6"	7"	8"
ORDER #	6DP-RCS	7DP-RCS	8DP-RCS
STOCK #	810000530	810000577	810000616


DuraChimney® II

**Air-cooled chimney system for
masonry fireplaces.**

UL 103.



Roof Radiation Shield

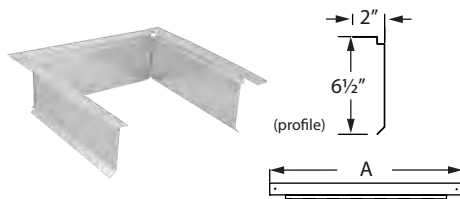


Required at top of chase enclosure or where chimney passes through the roof. Roof Radiation Shield is not required if chimney is unenclosed in the attic. Four plates (included) make up one shield. Three of the four plates shown.

SIZE	10"	12"	14"	16"
A	20"	22"	24"	26"
ORDER #	10DCA-RRS	12DCA-RRS	14DCA-RRS	16DCA-RRS
STOCK #	810000794	810000816	810000837	810000858

Chase Top Flashing


updated photo and dimensions

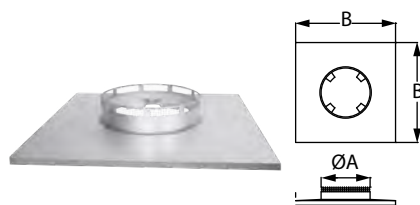

Encloses the top of a chase while providing a ventilation air passage to the chase. Includes spacer clips.

SIZE	10"	12"	14"	16"
A	16"	18"	20"	22"
B	20"	36"	38"	40"
ORDER #	10DCA-CTF	12DCA-CTF	14DCA-CTF	16DCA-CTF
STOCK #	810000795	810000817	810000838	810000859


Chase Top Collar

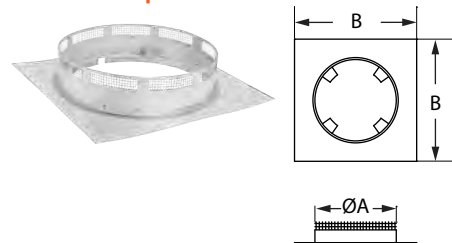

Use to construct custom sized chase tops. Provides necessary ventilation and spacing to maintain UL listing for chimney system.

SIZE	10"	12"	14"	16"
A	16"	18"	20"	22"
B	20"	22"	24"	26"
ORDER #	10DCA-CTC	12DCA-CTC	14DCA-CTC	16DCA-CTC
STOCK #	810000796	810000818	810000839	810000860

Storm Collar

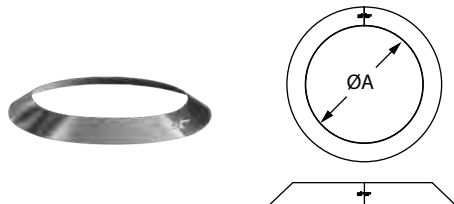

Use to help prevent rain from entering chase. Use with a flashing and Chimney Cap.

SIZE	10"	12"	14"	16"
A	13"	15"	17"	19"
ORDER #	10DCA-SC	12DCA-SC	14DCA-SC	16DCA-SC
STOCK #	810000798	810000820	810000841	810000862

Combustion Air System


**Triple-wall stovepipe system
designed to provide air for combustion
through its components.
UL 1777 and ULC S641.**

DVL®


**Double-wall interior
close clearance stovepipe for
connecting woodstoves to chimney.
ULC S641.**

DuraBlack®

**Single-wall interior
stovepipe for connecting
woodstoves to chimney.**

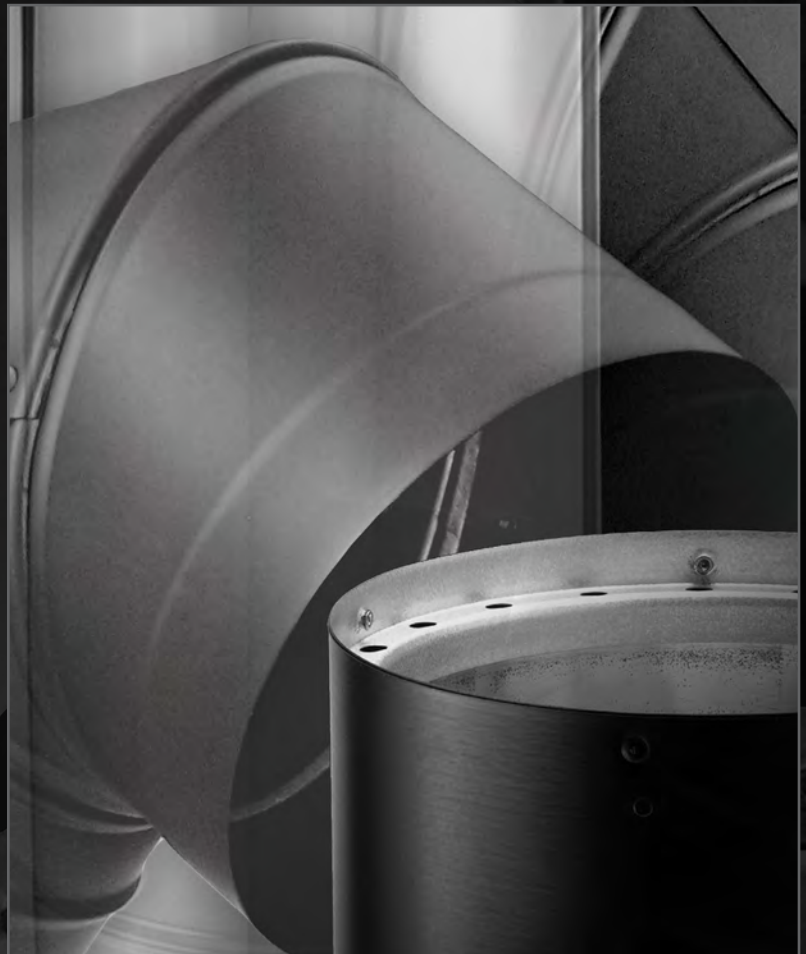


DuraBlack 45° Elbow



Offsets obstructions as needed. Elbows angles are now adjustable. Adjustable elbows are manufactured drip free so creosote travels back to the stove as intended.

SIZE	6"	7"	8"	10"
A	4"	4"	4 ½"	4 ½"
B	3 ½"	3 ¾"	4 ½"	3 ¾"
ORDER #	6DBK-E45	7DBK-E45	8DBK-E45	10DBK-E45
STOCK #	810000972	810000989	810001009	810001025

DuraBlack 90° Elbow




Offsets obstructions as needed. Elbows angles are now adjustable. Adjustable elbows are manufactured drip free so creosote travels back to the stove as intended. Not recommended for rear exit appliances.

SIZE	6"	7"	8"	10"
A	6"	6 ¼"	7"	7 ½"
B	5 ¾"	6 ¾"	7 ½"	7"
ORDER #	6DBK-E90	7DBK-E90	8DBK-E90	10DBK-E90
STOCK #	810000974	810000990	810001011	810001026

DuraBlack Damper Section


updated illustration



Install at, or close to, the stove outlet in-line. 5" pipe section with the damper pre-installed.

SIZE	6"	7"	8"
ORDER #	6DBK-DS	7DBK-DS	8DBK-DS
STOCK #	810000976	810000992	810001013


DuraBlack Oval to Round Adapter



Connects to the oval flue outlet of the appliance. Must be field ovalized.

SIZE	6"	7"	8"
A	6 ⅛"	7 ⅛"	8 ⅛"
B	5 ⅛"	6 ⅛"	7 ⅛"
ORDER #	6DBK-ADOR	7DBK-ADOR	8DBK-ADOR
STOCK #	810000977	810000993	810001014


DuraBlack Welded 45° Elbow

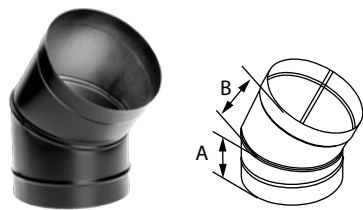

Offsets obstructions as needed. Adjustable.

SIZE	6"
A	4"
B	3 1/2"
ORDER #	6DBK-E45W
STOCK #	810008021

DuraBlack Welded 90° Elbow

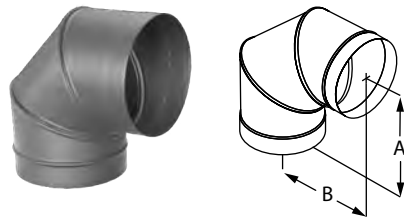


Offsets obstructions as needed. Adjustable. Not recommended for rear exit appliances.

SIZE	6"
A	6"
B	5 3/4"
ORDER #	6DBK-E90W
STOCK #	810008022

DuraBlack Welded Damper Section

updated illustration

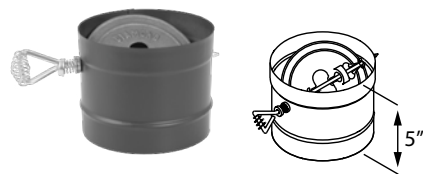

Install at, or close to, the stove outlet in-line. 5" pipe section with the damper pre-installed.

SIZE	6"
ORDER #	6DBK-DSW
STOCK #	810008020


DuraBlack Welded Stovetop Adapter



Use to adapt DuraBlack stovepipe to appliance flue outlet.

SIZE	6"
A	5 15/16"
ORDER #	6DBK-ADW
STOCK #	810008019


DVL Double-Wall Black Pipe



Designed for installation with minimum clearance to combustibles (6" to walls, 8" from top of horizontal run to ceiling). Available in 6", 7", and 8" diameters. Subtract ¾" for installed length. Constructed with a stainless steel inner wall.

SIZE		6"	7"	8"
A		7"	8"	9"
B		6"	7"	8"
C		7 1/8"	8 1/8"	9 1/8"
D		6", 12", 18", 24", & 48"		
6" LENGTH	ORDER #	6DVL-06	7DVL-06	8DVL-06
	STOCK #	810000901	810000920	810000937
12" LENGTH	ORDER #	6DVL-12	7DVL-12	8DVL-12
	STOCK #	810000902	810000921	810000938
18" LENGTH	ORDER #	6DVL-18	7DVL-18	8DVL-18
	STOCK #	810000903	810000922	810000939
24" LENGTH	ORDER #	6DVL-24	7DVL-24	8DVL-24
	STOCK #	810000904	810000923	810000940
48" LENGTH	ORDER #	6DVL-48	7DVL-48	8DVL-48
	STOCK #	810000905	810000924	810000941

DVL Double-Wall Adjustable Black Pipe

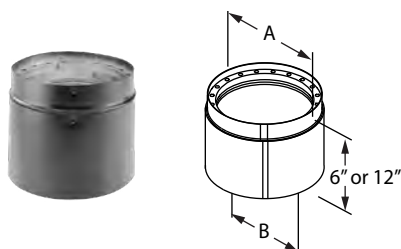


Use to add length to DVL pipe. 6" pipe adds 2"-5" of length, 12" pipe adds 2"-11" of length, when used with rigid sections of pipe. 12" section can be ovalized for oval-to-round appliance connector.

SIZE		6"	7"	8"
A		7"	8"	9"
B		6"	7"	8"
6" ORDER #	ORDER #	6DVL-6ADJ	7DVL-6ADJ	8DVL-6ADJ
	STOCK #	810000906	810000925	810000942
12" ORDER #	ORDER #	6DVL-12ADJ	7DVL-12ADJ	8DVL-12ADJ
	STOCK #	810000907	810000926	810000943

DVL Telescoping Length

updated dimensions and illustration

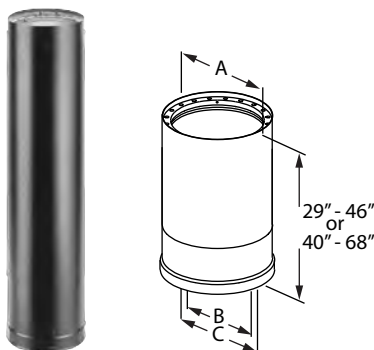

Use for a two-piece installation from stove to ceiling support box or finishing collar. Available in 29"-46" and 40"-68" extensions. No cutting required.

SIZE		6"	7"	8"
A		7"	8"	9"
B		6"	7"	8"
C		7 1/8"	8 1/8"	9 1/8"
29" - 46"	ORDER #	6DVL-46TA	7DVL-46TA	8DVL-46TA
	STOCK #	810000908	810000927	810000944
40" - 68"	ORDER #	6DVL-68TA	7DVL-68TA	7DVL-68TA
	STOCK #	810000909	810000928	810000945


PelletVent Pro®
Biofuel venting system.
UL 641, ULC S609, and
ULC/ORD C441.




Bring In the Fresh Air

Combustion Air System For PelletVent Pro

CAS system for PelletVent Pro can be used for horizontal (through-the-wall) installations. The CAS System cannot be used with vertical (through-the-ceiling) installations. The PelletVent Pro CAS stove system is available in 3" and 4" pellet chimney sizes. The system's pellet stove wall thimble is designed with an air channel to direct combustion air into the appliance or as a direct vent system allowing for closer placement to windows. PelletVent Pro CAS is considered a direct vent for pellet appliances, which allows for clearances down to 12 inches to building openings, as defined by NFPA 211.

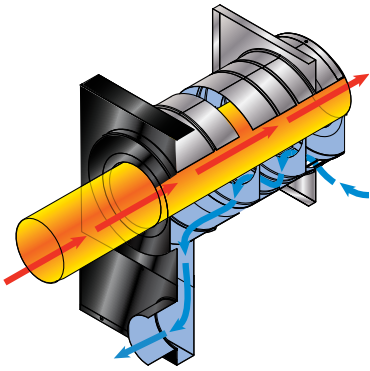

Combustion Air Wall Thimble Kit

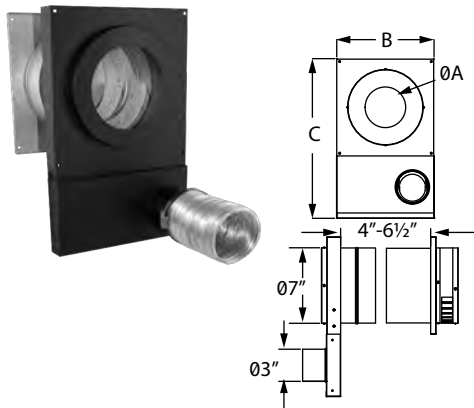

Includes Wall Thimble, Channel Adapter, Flex and 2" to a direct vent for bringing outside air for combustion through an adjustable air channel in wall thimble to appliance without cutting a second hole into the wall. Minimizes down drafts in below-grade installations. Patent-pending.

SIZE	3"	4"
A	3 3/4"	4 3/4"
B	9"	9"
C	14 3/4"	14 3/4"
ORDER #	3CAS-WTPK	4CAS-WTPK
STOCK #	810000894	810000895

Combustion Air Adjustable Wall Channel

updated order and stock numbers



Telescoping Wall Channel 36"-70". Shown here attached to Combustion Air Wall Thimble Kit (not included).

SIZE	3" & 4"
ORDER #	CAS-C70A
STOCK #	810006860

PelletVent Pro Horizontal Kit

updated photo



Kit includes: Round Horizontal Cap, Wall Thimble, and Appliance Adapter. Pipe lengths not included. 4" Kit includes a 3"-4" Appliance Adapter/Increaser, painted black.

SIZE	ORDER #	STOCK #
3"	3PVP-KHA	810001029
4"	4PVP-KHA	810001035

PelletVent Pro Vertical Kit - Flat Ceiling



Kit includes: Vertical Cap, Storm Collar, Ceiling Support Firestop Spacer, Adjustable Flashing, and Appliance Adapter. Pipe lengths not included. 4" Kit includes a 3"-4" Appliance Adapter/Increaser, painted black. Support Clamp included.

SIZE	ORDER #	STOCK #
3"	3PVP-KVA	810001031
4"	4PVP-KVA	810001036

PelletVent Pro Vertical Kit - Cathedral




Kit includes: Vertical Cap, Storm Collar, Cathedral Ceiling Support Box with trim and clamp, Adjustable Flashing, and Appliance Adapter. Pipe lengths not included. 4" Kit includes a 3"-4" Appliance Adapter/Increaser, painted black.

SIZE	ORDER #	STOCK #
3"	3PVP-KVB	810001033
4"	4PVP-KVB	810001037

Fresh Air Intake Kit

updated description

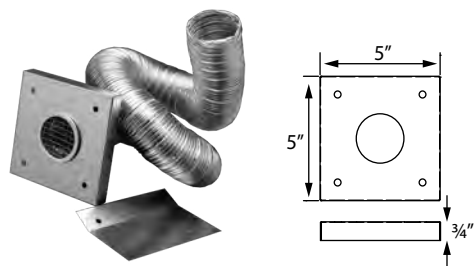


Kit includes: faceplate with screen, moisture barrier, aluminum flex, and two clamps.

Allows fresh air into an existing pellet stove installation that had been using inside air. Allows an installer to decide the best possible location for the air intake vent, not the same location as the wall thimble. The 2" diameter flex hose expands to approximately 10'.

SIZE	ORDER #	STOCK #
3"	3PVP-AIK	810001034


Straight Length Pipe

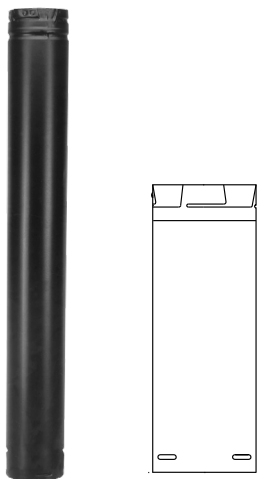

Features fully unitized, twist-lock construction in 3" and 4" diameters. Listed at 1" clearance to combustibles in the USA and Canada. It can be used in both vertical and horizontal installations. Stainless steel welded seam inner wall, combined with a galvalume welded seam outer wall. Pipe OD is diameter plus 5/8". Galvalume or painted black outer finish. 12" length available with stainless steel outer (SS). To calculate installed length, subtract 1 1/2" from each length of pipe.

SIZE	3"		4"	
	ORDER #	STOCK #	ORDER #	STOCK #
6"	3PVP-06	810001038	4PVP-06	810001104
6" BLACK	3PVP-06B	810001039	4PVP-06B	810001105
12"	3PVP-12	810001040	4PVP-12	810001106
12" BLACK	3PVP-12B	810001041	4PVP-12B	810001107
12" STAINLESS STEEL	3PVP-12SS	810001042	4PVP-12SS	810001108
24"	3PVP-24	810001043	4PVP-24	810001109
24" BLACK	3PVP-24B	810001044	4PVP-24B	810001110
24" STAINLESS STEEL	3PVP-24SS	810001045	4PVP-24SS	810001111
36"	3PVP-36	810001046	4PVP-36	810001112
36" BLACK	3PVP-36B	810001047	4PVP-36B	810001113
60"	3PVP-60	810001048	4PVP-60	810001114
60" BLACK	3PVP-60B	810001049	4PVP-60B	810001115

Pipe Extension



Use to add length to PelletVent Pro pipe. 12" pipe adds 3"-10" of length, 18" pipe adds 3"-16" of length, when used with rigid sections of pipe. Galvalume or painted black outer finish.

SIZE	ORDER #	STOCK #	A
3"	3PVP-12A	810001050	3" - 10"
3" BLACK	3PVP-12AB	810001051	3" - 10"
3"	3PVP-18A	810001052	3" - 16"
3" BLACK	3PVP-18AB	810001053	3" - 16"
3"	3PVP-48A	810001054	4" - 46"
3" BLACK	3PVP-48AB	810001055	4" - 46"
4"	4PVP-12A	810001116	3" - 10"
4" BLACK	4PVP-12AB	810001117	3" - 10"
4"	4PVP-18A	810001118	3" - 16"
4" BLACK	4PVP-18AB	810001119	3" - 16"
4"	4PVP-48A	810001120	4" - 46"
4" BLACK	4PVP-48AB	810001121	4" - 46"

Flex Pipe


updated description



Use for offsetting rigid pipe around smoke shelf in masonry chimney only. Allows for offsets with biofuel appliances. Female and male ends twist-lock. Female end swivels for easy alignment. 10' flex section. Not for use in attic or wall spaces.

SIZE	ORDER #	STOCK #
3"	3PVP-60F	810001056
4"	4PVP-60F	810001122


Flex Trim Collar



Use to connect PelletVent Pro rigid pipe to a masonry chimney with stainless steel flexible relining. Female end swivels to allow ease of connection.

SIZE	ORDER #	STOCK #	A	B
3"	3PVP-FTC	810001092	3 3/8"	8 1/2"
4"	4PVP-FTC	810001156	4 5/8"	8 1/2"


Female Flex Adapter



Use to connect PelletVent Pro to BioFlex when relining a masonry chimney. Only approved for use with BioFlex.

SIZE	ORDER #	STOCK #
3"	3PVP-ADFF	810001062
4"	4PVP-ADFF	810001125


Appliance Adapter/Increaser

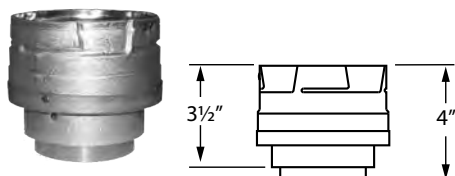

Use to attach to appliance outlet allowing for easy pipe connection. Allows connection of 4" vent to 3" appliance outlet. Seal adapter to appliance with high temperature sealant.

SIZE	ORDER #	STOCK #
3"	3PVP-X4AD	810001060
3" BLACK	3PVP-X4ADB	810001061


45° Elbow

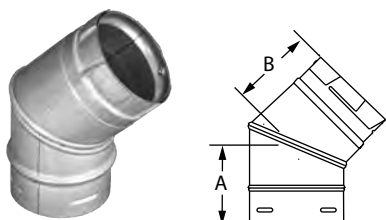

Offsets obstructions as needed. Elbows swivel 360° at base. Angle not adjustable.

SIZE	ORDER #	STOCK #	A	B
3"	3PVP-E45	810001064	3 7/8"	4"
3" BLACK	3PVP-E45B	810001065	3 7/8"	4"
4"	4PVP-E45	810001127	3 7/8"	4"
4" BLACK	4PVP-E45B	810001128	3 7/8"	4"

90° Elbow

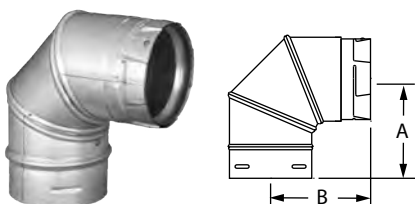


Offsets obstructions as needed. Elbows swivel 360° at base. Angle not adjustable.

SIZE	ORDER #	STOCK #	A	B
3"	3PVP-E90	810001066	5 1/2"	5 1/2"
3" BLACK	3PVP-E90B	810001067	5 1/2"	5 1/2"
4"	4PVP-E90	810001129	5 1/2"	5 1/2"
4" BLACK	4PVP-E90B	810001130	5 1/2"	5 1/2"

Single Tee w/ Clean-Out Tee Cap

updated description

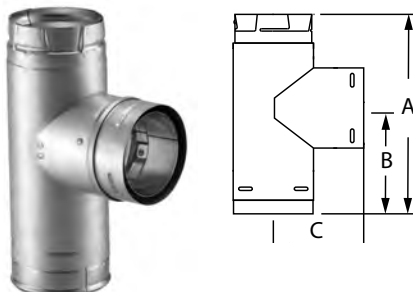


Use for a 90° offset. Branch swivels for alignment. One piece unit incorporates removable twist-lock Clean-Out Tee Cap.

SIZE	ORDER #	STOCK #
3"	3PVP-T	810001068
3" BLACK	3PVP-TB	810001069
4"	4PVP-T	810001131
4" BLACK	4PVP-TB	810001132

Increaser Tee
w/ Clean-Out Tee Cap

updated description

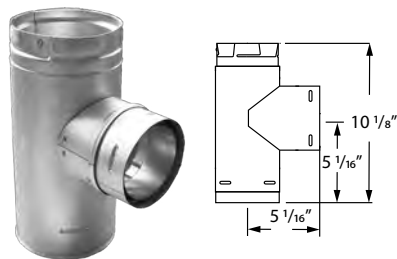


Attaches 3" pipe to branch and 4" pipe to body. Use for a 90° offset. Branch swivels for alignment. One piece unit incorporates removable twist-lock Clean-Out Tee Cap.

SIZE	ORDER #	STOCK #
4"	4PVP-T3	810001133
4" BLACK	4PVP-T3B	810001134

Adapter Tee
w/ Clean-Out Tee Cap

updated description

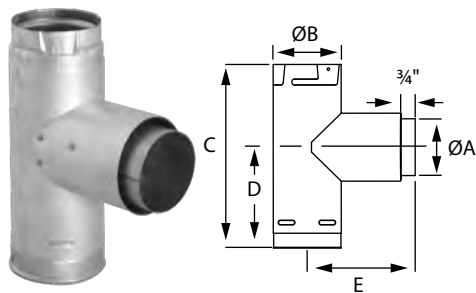


Use for a 90° offset. Attaches directly to appliance as an adapter. One piece unit incorporates removable twist-lock Clean-Out Tee Cap.

SIZE	ORDER #	STOCK #	A	B
3"	3PVP-TAD	810001070	3"	3 5/8"
3" BLACK	3PVP-TADB	810001071	3"	3 5/8"
4"	4PVP-TAD	810001135	4"	4 5/8"
4" BLACK	4PVP-TADB	810001136	4"	4 5/8"

Increaser Adapter Tee
w/ Clean-Out Tee Cap


updated description

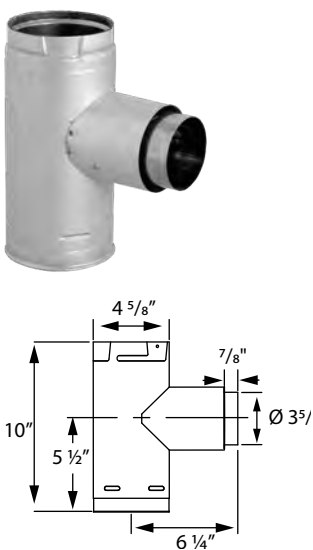

Use for a 90° offset. Attaches directly to appliance as an adapter. Converts a 3" appliance to a 4" PelletVent Pro system. One piece unit incorporates removable twist-lock Clean-Out Tee Cap.

SIZE	ORDER #	STOCK #
3"	3PVP-TADX4	810001072
3" BLACK	3PVP-TADX4B	810001073


Double Tee w/ Clean-Out Tee Cap
updated description

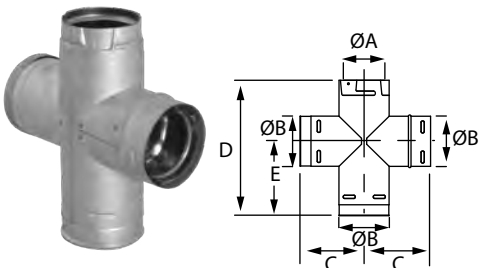

Allows clean-out access for horizontal and vertical installations. Use for a 90° offset. Branch swivels for alignment. One piece unit incorporates removable twist-lock Clean-Out Tee Cap.

SIZE	ORDER #	STOCK #	A	B	C	D
3"	3PVP-DBT	810001074	3"	3 5/8"	4 5/8"	4 1/2"
3" BLACK	3PVP-DBTB	810001075	3"	3 5/8"	4 5/8"	4 1/2"
4"	4PVP-DBT	810001137	4"	4 5/8"	5 1/8"	5"
4" BLACK	4PVP-DBTB	810001139	4"	4 5/8"	5 1/8"	5"


Clean-Out Tee Cap

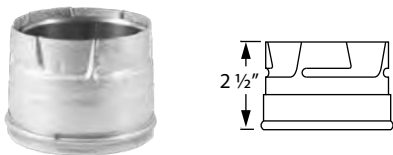

Use as a replacement Clean-Out Tee Cap. The new PelletVent Pro Tee Cap is a tight fit by design. We recommend using rubber gloves or a strap wrench to easily remove.

SIZE	ORDER #	STOCK #
3"	3PVP-CO	810001076
3" BLACK	3PVP-COB	810001077
4"	4PVP-CO	810001138
4" BLACK	4PVP-COB	810001140


Wall Thimble

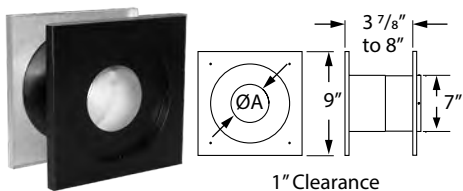

Use for through-the-wall installations. Fits between standard wall studs. Comes with an insulation ring to reduce air infiltration where the pipe slips through the thimble.

SIZE	ORDER #	STOCK #	A
3"	3PVP-WT	810001081	3 3/4"
4"	4PVP-WT	810001145	4 3/4"

Combustion Air
Wall Thimble Kit

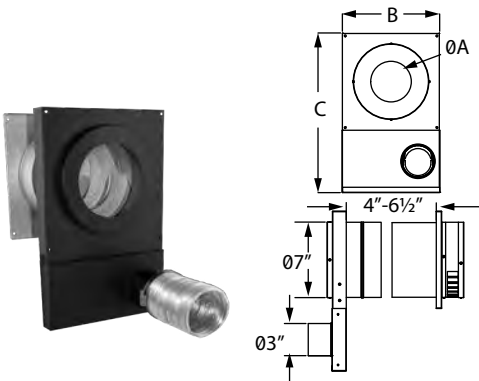


A direct vent for bringing outside air for combustion through an adjustable air channel in wall thimble to appliance without cutting a second hole into the wall. Minimizes down drafts in below-grade installations. Patent-pending.

SIZE	ORDER #	STOCK #	A	B	C
3"	3CAS-WTPK	810000894	3 3/4"	9"	14 3/4"
4"	4CAS-WTPK	810000895	3 3/4"	9"	14 3/4"

Wall Thimble Air Intake Kit


updated description

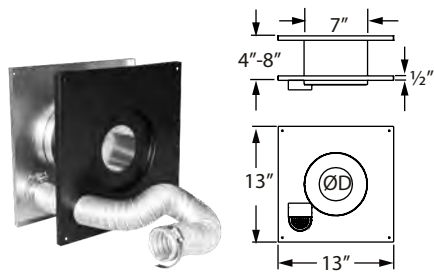

Allows outside fresh air for combustion through the wall thimble without having to cut a second hole into the wall. Comes with an insulation ring to reduce air infiltration where the pipe slips through the thimble. The 2" diameter flex hose expands to 10". Clamps included. Can be used in US and Canada. Patented.

SIZE	FLEX Ø	ORDER #	STOCK #
3"	2"	3PVP-WTI	810001083
4"	2"	4PVP-WTI	810001147
4"	3"	4PVP-WTI3	810001148


Ceiling Support Firestop Spacer

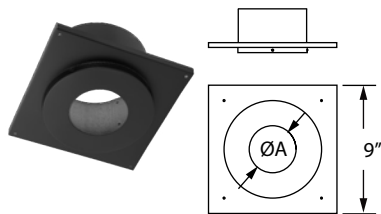

Required where vent passes through ceiling. Centers pipe to provide proper 1" clearance. Support Clamp included. Painted black.

SIZE	ORDER #	STOCK #	A
3"	3PVP-FS	810001084	3 3/4"
4"	4PVP-FS	810001149	4 3/4"


Ceiling Support Firestop Spacer - 3" Clearance

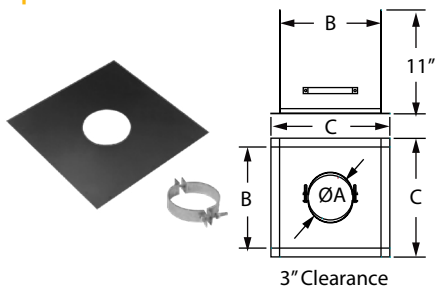

Required where vent passes through ceiling. Centers pipe to provide 3" clearance. Support Clamp included. Painted black.

SIZE	ORDER #	STOCK #	A	B	C
3"	3PVP-FS3	810001085	3 3/4"	9 5/8"	11 5/8"
4"	4PVP-FS3	810001150	4 3/4"	10 5/8"	12 5/8"

Wall Strap

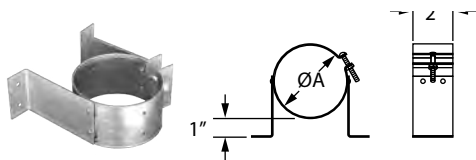

Use to support vent pipe or tee sections. Provides 1" clearance.

SIZE	ORDER #	STOCK #	A
3"	3PVP-WS	810001086	3 5/8"
4"	4PVP-WS	810001151	4 5/8"


Storm Collar



Use to maintain a weather tight resistant seal between the pipe and the flashing.

SIZE	ORDER #	STOCK #	A	B
3"	3PVP-SC	810001091	3 5/8"	7 3/8"
4"	4PVP-SC	810001155	4 5/8"	8 1/8"

Vertical Cap

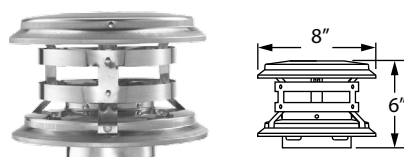


Use for vertical installations only. Required where pipe terminates above the roof line.

SIZE	ORDER #	STOCK #
3"	3PVP-VC	810001078
4"	4PVP-VC	810001141

Horizontal Cap


updated photo, order# and illustration

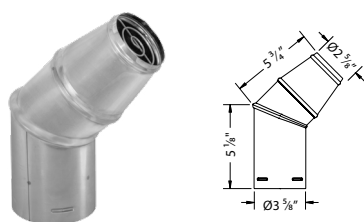

Use for horizontal terminations only. The Horizontal Cap can be turned at the gore to direct exhaust output. Designed to create a venturi effect to force exhaust out. Made of a laser-welded, super-ferritic stainless steel inner wall that is scientifically proven to resist corrosion from corn and other biofuels. Outer wall made of laser-welded stainless steel.

SIZE	ORDER #	STOCK #
3"	3PVP-HC2	810001079
4"	4PVP-HC2	810001143

Square Horizontal Cap

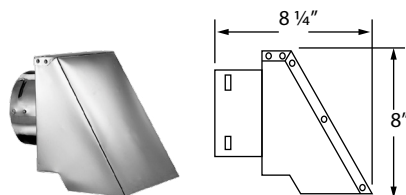

Use for horizontal terminations only. Cap features swivel collar to adjust exhaust direction. Cap features an optional swivel base.

SIZE	ORDER #	STOCK #
3"	3PVP-HSC	810001080
4"	4PVP-HSC	810001144


Pellet Vent Factory-Built Reline Kit ***new photo***



Use to reline an existing factory-built chimney or B vent. Can be used for wood, pellet, and biofuel burning appliances.

SIZE	304 Length		316 Length	
	ORDER #	STOCK #	ORDER #	STOCK #
3" Diameter 20' Length	3PVP304-20KFB	810009339	3PVP316-20KFB	810009340
4" Diameter 35' Length	4PVP304-35KFB	810009341	4PVP316-35KFB	810009342

Offset Chart

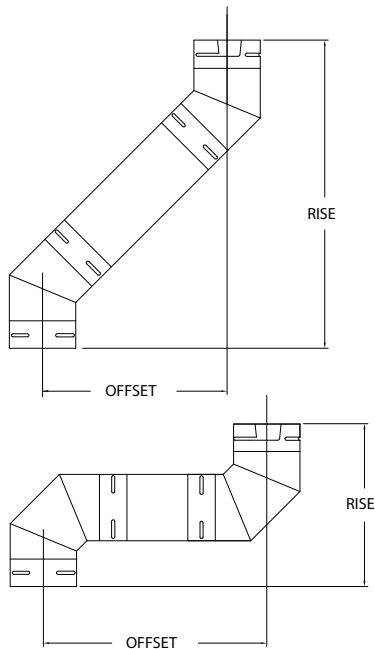


Elbow Angle from Vertical	Chimney Length Between Elbows	Ø3" Offset	Ø3" Rise	Ø4" Offset	Ø4" Rise
45°	0"	3 ¾"	10 ¼"	4 ¼"	12 ¼"
45°	6"	7"	13 ½"	7 ½"	15 ½"
45°	12"	11 ¼"	17 ¾"	11 ¾"	19 ¾"
45°	24"	19 ¾"	26 ¼"	20 ¼"	28 ¼"
45°	36"	28 ½"	34 ¾"	28 ¾"	36 ¾"
45°	24" + 24"	35 ½"	42"	36"	44"
45°	60"	45 ¼"	51 ¾"	45 ¾"	53 ¾"
45°	36" + 36"	52 ½"	59"	53"	61"
90°	0"	8 ¼"	9 ¾"	10"	11 ½"
90°	6"	12 ¾"	9 ¾"	14 ½"	11 ½"
90°	12"	18 ¾"	9 ¾"	20 ½"	11 ½"
90°	24"	30 ¾"	9 ¾"	32 ½"	11 ½"
90°	36"	42 ¾"	9 ¾"	44 ½"	11 ½"
90°	24" + 24"	53 ¼"	9 ¾"	55"	11 ½"
90°	60"	66 ¾"	9 ¾"	68 ½"	11 ½"
90°	36" + 36"	77 ¼"	9 ¾"	79"	11 ½"

DuraLiner®


**Insulated, double-wall
masonry relining.**

UL 1777 and ULC S635.

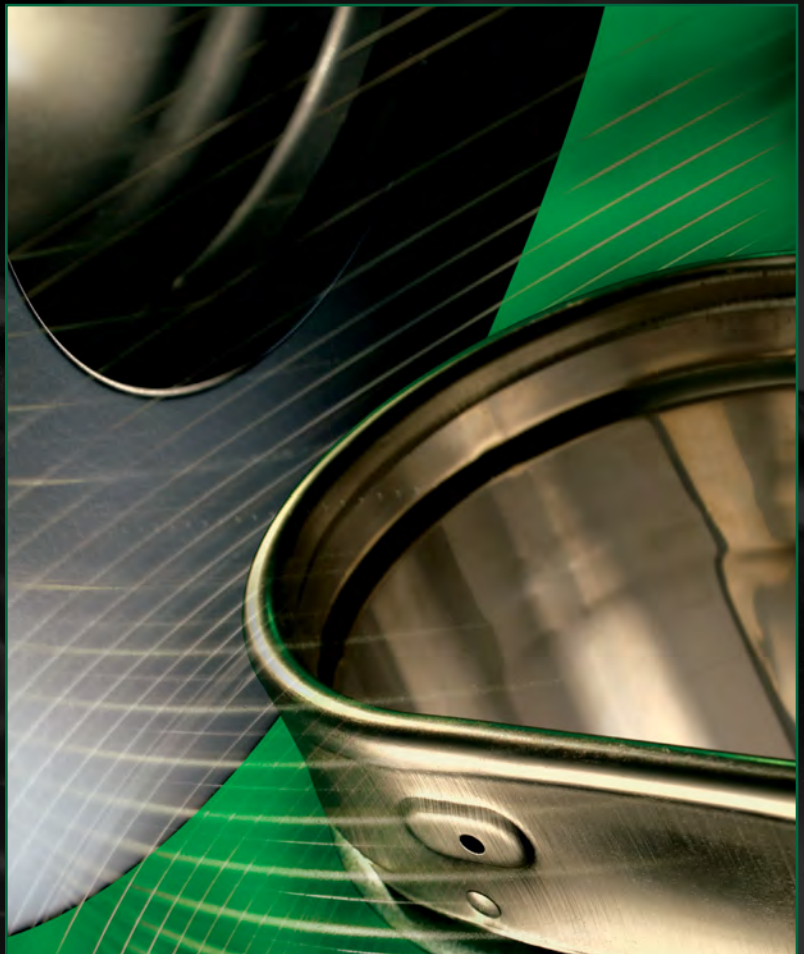

Round Tee w/ 6" Branch - 5"


new product

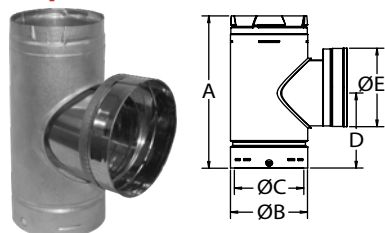

Provides connection between Masonry Wall Thimble or stove connector pipe to round DuraLiner. Branch is removable.

SIZE	ORDER #	STOCK #	A	B	C	D	E
5"	5DLR-TX6	810009937	12"	5 5/8"	5"	6"	6"


Round Tee and Round Branch w/ Cap - 5"

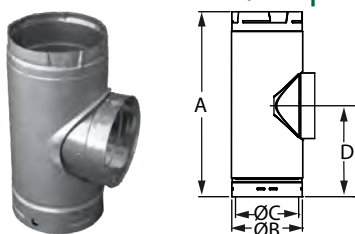

Provides connection between Masonry Wall Thimble or stove connector pipe to round DuraLiner. Branch is removable.

SIZE	ORDER #	STOCK #	A	B	C	D
5"	5DLR-T	810001181	12"	5 5/8"	5 1/2"	6"


Round Tee and Round Branch w/ Cap

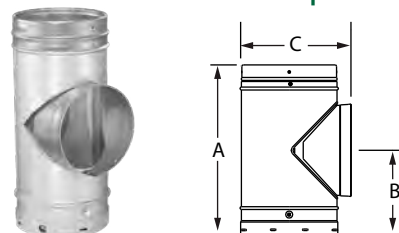

Provides connection between Masonry Wall Thimble, Wall Pass Through, or stove connector pipe to round DuraLiner. Branch is removable.

SIZE	ORDER #	STOCK #	A	B	C
6"	6DLR-T	810001201	15 1/8"	7 1/2"	8"
8"	8DLR-T	810001240	15 1/8"	7 1/2"	10"


Oval Tee and Round Branch w/ Cap

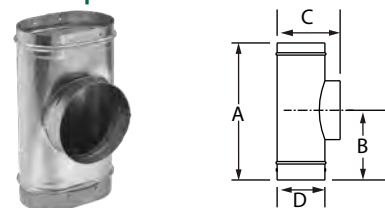

Provides connection between Masonry Wall Thimble, Wall Pass Through, or stove connector pipe to oval DuraLiner. Single-wall. May require additional insulation. Refer to DuraLiner installation instructions.

SIZE	ORDER #	STOCK #	A	B	C	D
6"	6DLR-OTRB	810001202	14 1/4"	7 1/2"	6 3/16"	4 7/8"
8"	8DLR-OTRB	810001241	14 1/4"	7 1/2"	6 3/16"	4 7/8"

6"-5" Reducer



Use to reduce flue collar from 6" diameter to 5" diameter, when permitted by appliance manufacturer.

SIZE	ORDER #	STOCK #
5"	5DLR-R6	810001182

DuraFlex®

**Flexible stainless steel relining
for masonry chimney.
UL 1777 and ULC S635.**



DuraFlex Insert Adapter


updated photo



Use to connect the flex to an insert that has a flat surfaced outlet.

SIZE	ORDER #	STOCK #
3"	3DFS-ADC	810008046
4"	4DFS-ADC	810008047
5"	5DFS-ADC	810008048
5 1/2"	55DFS-ADC	810008049
6"	6DFS-ADC	810008050
7"	7DFS-ADC	810008051
8"	8DFS-ADC	810008052


DuraFlex SS Connector



Use to connect DuraFlex SS length to an appliance, rigid length, or flex length. Drip-free connection.

SIZE	ORDER #	STOCK #	A	B	C
3"	3DFS-FC	810002424	4 1/8"	3"	3 1/2"
4"	4DFS-FC	810002432	4 1/8"	4"	4 1/2"
5"	5DFS-FC	810002441	4 1/8"	5"	5 1/2"
5 1/2"	55DFS-FC	810002451	4 1/8"	6"	5 1/2"
6"	6DFS-FC	810002460	4 1/8"	6 1/2"	6"
7"	7DFS-FC	810002469	4 1/8"	7"	7 1/2"
8"	8DFS-FC	810002477	4 1/8"	8"	8 1/2"


DuraFlex SS Reducer



Use to connect 5 1/2" DuraFlex SS length to a 6" appliance. Check with the appliance manufacturer before reducing the vent size. May also be used to connect to stovepipe on a through masonry wall installations.

SIZE	ORDER #	STOCK #
5 1/2"	6DFS-X55	810002465

DuraFlex SS Tee w/ Cap



Use to attach to DuraFlex SS length with a fast connect band. Removable branch connects tee body with an internal fast connect band. 5 1/2" Tee has a 6" branch.


SIZE	ORDER #	STOCK #	A	B
3"	3DFS-T	810002423	8 1/2"	3 1/4"
4"	4DFS-T	810002431	9 1/2"	4 1/4"
5"	5DFS-T	810002440	9 1/2"	4 1/4"
5 1/2"	55DFS-T	810002450	10 1/2"	4 3/8"
6"	6DFS-T	810002459	10 1/2"	4 3/8"
7"	7DFS-T	810002468	11 1/2"	4 1/2"
8"	8DFS-T	810002476	13"	5 3/4"

DirectVent Pro®


**Unitized, co-axial venting
system for direct vent gas or
propane stoves, and fireplaces.**




Typical Installations ***updated typicals***




Cathedral Ceiling
Stove Installation

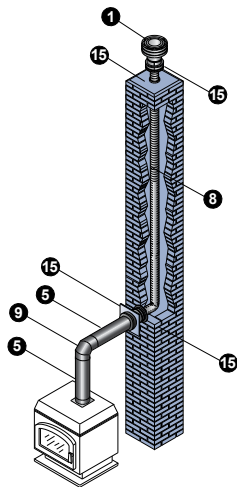


Masonry Chimney
Conversion

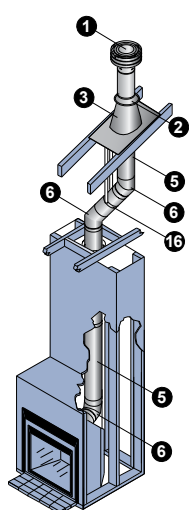


Fireplace
Vertical Termination




Metal Chimney
Conversion

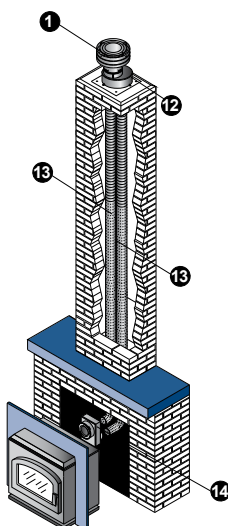

Co-Linear Insert



Stove with Snorkel
Horizontal Termination




Stove
Horizontal Termination

Installation Key

1	Vertical Termination Cap	9	90° Elbow
2	Storm Collar	10	Horizontal Termination Cap
3	Flashing	11	Snorkel Termination Cap
4	Cathedral Ceiling Support Box	12	Colinear Kit
5	Pipe	13	3" or 4" Flex
6	45° Elbow	14	Co-Axial to Co-Linear Connector
7	Class A Chimney Conversion Kit	15	Masonry Chimney Conversion Kit
8	4" Flex	16	Elbow Strap

• Refer to our Typical Venting Installation drawings to select the appropriate component parts for your installation.

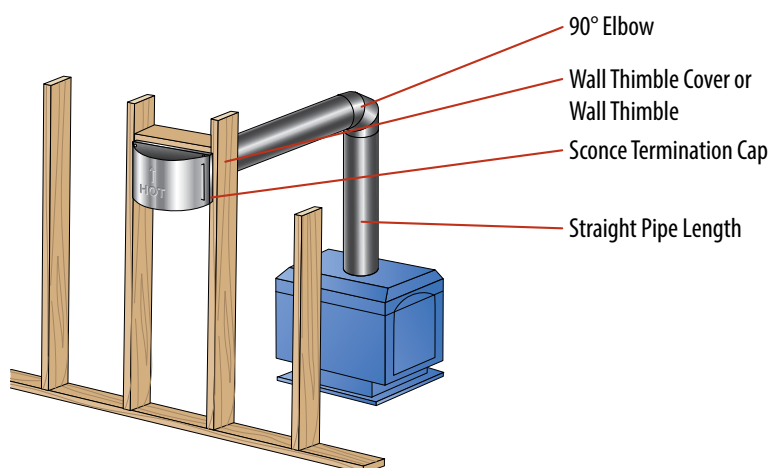

90° Elbow

Wall Thimble Cover or
Wall Thimble

Scence Termination Cap

Straight Pipe Length

Direct Vent Factory-Built Reline Kit *new photo*




Use when installing a direct vent co-linear insert into an existing factory-built chimney.

Kit includes: High-Wind Termination Cap, Two pieces of Aluminum Flex Lengths, and 4 hose clamps.

CAP SIZE	ORDER #	STOCK #	A (RED FLEX EXHAUST)	B (AIR INTAKE)	CAP STYLE
4" x 6 5/8"	46DVA-CL33KFB	810007970	3" x 35'	3" x 35'	HIGH-WIND
4" x 6 5/8"	46DVA-CL34KFB	810009663	4" x 35'	3" x 35'	HIGH-WIND

Offset Chart

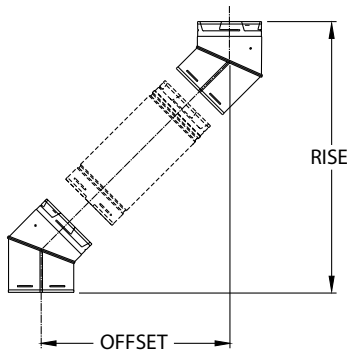

SIZE		4" x 6 5/8"		5" x 8"	
Elbow Degrees	Chimney Section	Offset Inches	Rise Inches	Offset Inches	Rise Inches
30°	0"	3 5/8"	14 7/8"	3 5/8"	14 7/8"
30°	6"	5 7/8"	20 3/4"	5 7/8"	20 3/4"
30°	9"	7 3/8"	21 3/8"	7 3/8"	21 3/8"
30°	12"	8 7/8"	23 7/8"	8 7/8"	23 7/8"
30°	18"	11 7/8"	29 1/8"	11 7/8"	29 1/8"
30°	24"	14 7/8"	32	14 7/8"	32
30°	36"	20 7/8"	44 3/4"	20 7/8"	44 3/4"
30°	48"	26 7/8"	55 1/8"	26 7/8"	55 1/8"
30°	60"	32 7/8"	65 1/2"	32 7/8"	65 1/2"
45°	0"	5"	13 1/2"	5 5/8"	15 3/8"
45°	6"	8 1/8"	16 5/8"	8 7/8"	18 3/8"
45°	9"	10 1/4"	18 3/4"	10 7/8"	20 5/8"
45°	12"	12 3/8"	20 7/8"	13	20 7/8"
45°	18"	16 5/8"	25 1/8"	16 5/8"	22 5/8"
45°	24"	20 7/8"	29 3/8"	21 3/8"	31 1/8"
45°	36"	29 3/8"	37 7/8"	29 7/8"	39 3/8"
45°	48"	37 7/8"	46 3/8"	38 1/8"	47 7/8"
45°	60"	46 3/8"	54 7/8"	46 5/8"	55 1/2"
60°	0"	6 1/8"	12 1/4"	6 1/8"	12 1/4"
60°	6"	10 1/8"	14 1/2"	10 1/8"	14 1/2"
60°	9"	12 5/8"	16	12 5/8"	16
60°	12"	15 1/4"	17 1/2"	15 1/4"	17 1/2"
60°	18"	20 1/2"	20 1/2"	20 1/2"	20 1/2"
60°	24"	25 5/8"	23 1/2"	25 5/8"	23 1/2"
60°	36"	36	29 1/2"	36	29 1/2"
60°	48"	46 1/2"	35 1/2"	46 1/2"	35 1/2"
60°	60"	56 7/8"	41 1/2"	56 7/8"	41 1/2"

Type B Gas Vent

Type B gas venting system.

UL 441 and ULC S605.


DuraFlex® AL

Aluminum flexible relining

UL 1777 & ULC S635.




Square Firestop Support

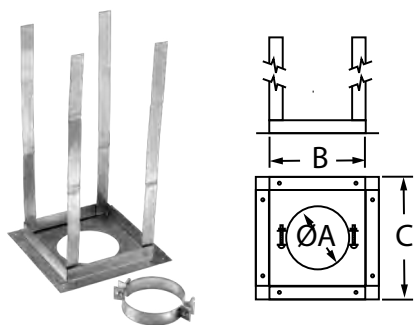

Use to support vent at ceiling level. Includes clamp that supports and prevents pipe sections from slipping down. Provides the mandatory 1" clearance to combustibles. Straps extend 16".

SIZE	ORDER #	STOCK #	A	B	C
3"	3GVRS	810002521	3 3/4"	5 3/4"	7 3/4"
4"	4GVRS	810002569	4 3/4"	6 3/4"	8 3/4"
5"	5GVRS	810002616	5 3/4"	7 3/4"	9 3/4"
6"	6GVRS	810002665	6 3/4"	8 3/4"	10 3/4"
7"	7GVRS	810002702	7 3/4"	9 3/4"	11 3/4"
8"	8GVRS	810002737	8 3/4"	10 3/4"	12 3/4"
10"	10GVRS	810002761	10 3/4"	12 3/4"	14 3/4"
12"	12GVRS	810002779	12 3/4"	14 3/4"	16 3/4"


Gas Vent Roof Support

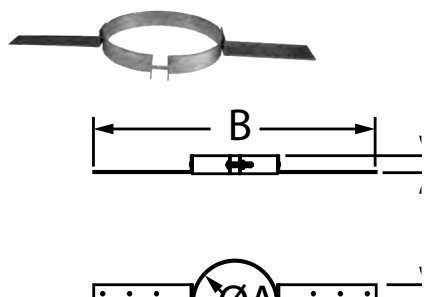

Use to support Type B gas vent pipe at roof level. Can be used when DuraConnect II is installed in attic space.

SIZE	ORDER #	STOCK #	A	B
3"	3GVS	810002522	3 5/8"	14 3/4"
4"	4GVS	810002570	4 5/8"	15 3/4"
5"	5GVS	810002617	5 5/8"	16 3/4"
6"	6GVS	810002666	6 5/8"	17 3/4"

Firestop Spacer ^{*updated dimensions*}

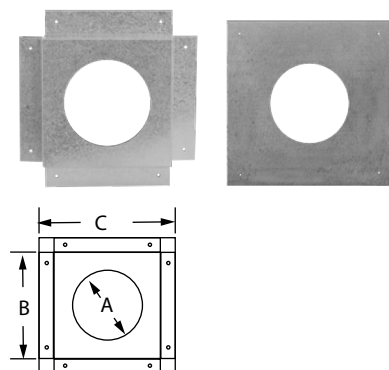

Use at every ceiling level where Square Firestop Support is not used. 3"-6" style shown in left photo. 7"-12" style shown in right photo.

SIZE	ORDER #	STOCK #	A	B	C
3"	3GVFS	810002523	3 3/4"	5 3/4"	7 3/4"
4"	4GVFS	810002571	4 3/4"	6 3/4"	8 3/4"
5"	5GVFS	810002618	5 3/4"	7 3/4"	9 3/4"
6"	6GVFS	810002667	6 3/4"	8 3/4"	10 3/4"
7"	7GVFS	810002703	7 3/4"	9 3/4"	11 5/8"
8"	8GVFS	810002738	8 3/4"	10 3/4"	12 5/8"
10"	10GVFS	810002762	10 3/4"	12 3/4"	15"
12"	12GVFS	810002776	12 3/4"	14 3/4"	17"

FasNSeal® & FasNSeal® W2

Single-wall and double-wall
special gas vent systems.

UL 1738 and ULC S636.

FasNSeal® Flex


Flexible chimney liner for
special gas vent system.

UL 1738 and UL 1777.



Single-Wall Wye

new sizes available

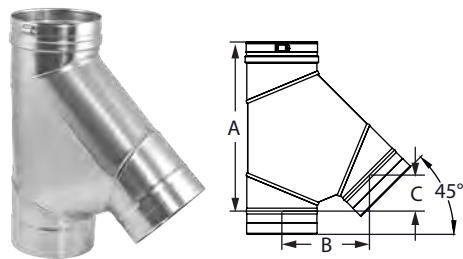

Use in place of any M&G DuraVent tee for a 45° angle instead of 90°; can be used as a manifold connection to gang multiple boilers into a common vent.

SIZE	ORDER #	STOCK #	A	B	C
6"	FSWYE06	810005506	14 1/2"	7 1/2"	3 1/10"
7"	FSWYE07	810007017	16 1/3"	8 3/5"	3 1/2"
8"	FSWYE08	810005507	18"	9 7/10"	4"
9"	FSWYE09	810005508	19 7/10"	10 7/10"	4 2/5"
10"	FSWYE10	810005509	21 2/5"	11 4/5"	4 9/10"
12"	FSWYE12	810005510	24 9/10"	14"	5 4/5"
14"	FSWYE14	810007018	28 3/10"	16 1/10"	6 3/5"
16"	FSWYE16	810009330	--	--	--
18"	FSWYE18	810009331	--	--	--
20"	FSWYE20	810009332	--	--	--
22"	FSWYE22	810007548	--	--	--
24"	FSWYE24	810007129	--	--	--


Tee Cap



Use to cap Standard Tee, Branch Tee or Boot Tee. Remove Tee Cap to inspect the system; clean out debris or collected condensate.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
3"	FSTC3	810003114	12"	FSTC12	810003484
4"	FSTC4	810003168	14"	FSTC14	810003524
5"	FSTC5	810003224	16"	FSTC16	810003559
6"	FSTC6	810003277	18"	FSTC18	810003588
7"	FSTC7	810003323	20"	FSTC20	810003608
8"	FSTC8	810003365	22"	FSTC22	810003628
9"	FSTC9	810003405	24"	FSTC24	810003647
10"	FSTC10	810003443			


Tapered Reducer



Use to reduce vent diameter. Creates a smooth transition for an undistruptive flow. Maximum 10" diameter increase size on both sizes. **Available in custom size combinations.**

SIZE	ORDER #	STOCK #	A	B	C
4" x 3"	FS0403TR	810003192	4"	3"	6 9/10"
5" x 4"	FS0504TR	810003242	5"	4"	6 9/10"

Stepped Reducer

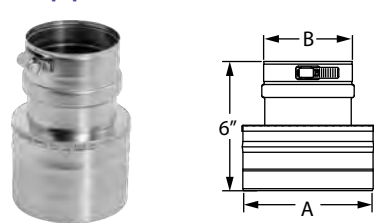


Use to reduce vent diameter when space constraints are an issue. **Available in custom size combinations.**

SIZE	ORDER #	STOCK #	A	B
4" x 3"	FS43R	810003194	4"	3"
5" x 4"	FS54R	810003243	5"	4"

Double-Wall Adapter


updated description

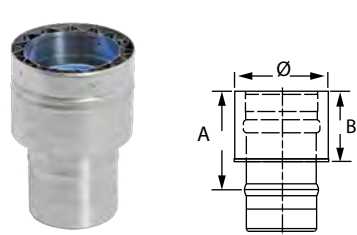

Use to transition from a single-wall pipe to double-wall pipe. To transition from double-wall to single-wall, please reference single-wall adapter available in double-wall FasNSeal section.

SIZE	ORDER #	STOCK #	A	B	SIZE	ORDER #	STOCK #	A	B
3"	FSA-SWDW3	810003139	4"	3"	12"	FSA-SWDW12	810003505	4"	3"
4"	FSA-SWDW4	810003197	4"	3"	14"	FSA-SWDW14	810003542	4"	3"
5"	FSA-SWDW5	810003246	4"	3"	16"	FSA-SWDW16	810003576	4"	3"
6"	FSA-SWDW6	810003298	4"	3"	18"	FSA-SWDW18	810003593	4"	3"
7"	FSA-SWDW7	810003340	4"	3"	20"	FSA-SWDW20	810003613	4"	3"
8"	FSA-SWDW8	810003385	4"	3"	22"	FSA-SWDW22	810003633	4"	3"
9"	FSA-SWDW9	810003423	4"	3"	24"	FSA-SWDW24	810003652	4"	3"
10"	FSA-SWDW10	810003464	4"	3"					


Standard Tee

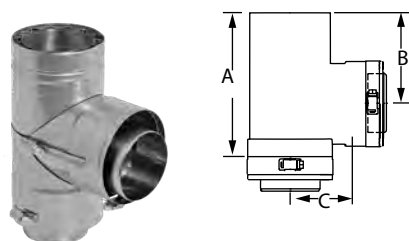

Use for a 90° offset, to combine connections from two or more appliances into a common vent or as a condensate management point when used in conjunction with drain fitting. All Standard Tees have completely welded inner walls.

SIZE	ORDER #	STOCK #	A	B	C	SIZE	ORDER #	STOCK #	A	B	C
3"	W2-T3	810003667	7 ³ / ₁₀ "	4 ¹ / ₂ "	3"	12"	W2-T12	810003839	16 ³ / ₁₀ "	9"	7"
4"	W2-T4	810003688	8 ³ / ₁₀ "	4 ⁴ / ₅ "	3 ¹ / ₂ "	14"	W2-T14	810003864	20 ³ / ₁₀ "	11"	8 ¹ / ₂ "
5"	W2-T5	810003709	9 ³ / ₁₀ "	5 ³ / ₁₀ "	4"	16"	W2-T16	810003887	22 ³ / ₁₀ "	12"	9 ¹ / ₂ "
6"	W2-T6	810003730	10 ³ / ₁₀ "	5 ⁴ / ₅ "	4 ¹ / ₂ "	18"	W2-T18	810003908	22 ⁷ / ₈ "	12 ¹ / ₂ "	11"
7"	W2-T7	810003751	11 ³ / ₁₀ "	6 ³ / ₁₀ "	5"	20"	W2-T20	810003925	24 ⁷ / ₈ "	13 ¹ / ₂ "	12"
8"	W2-T8	810003771	12 ³ / ₁₀ "	6 ⁴ / ₅ "	5 ¹ / ₂ "	22"	W2-T22	810003942	26 ⁷ / ₈ "	14 ¹ / ₂ "	13"
9"	W2-T9	810003794	13 ³ / ₁₀ "	7 ³ / ₁₀ "	6"	24"	W2-T24	810003958	28 ⁷ / ₈ "	15 ¹ / ₂ "	14"
10"	W2-T10	810003814	14 ³ / ₁₀ "	7 ⁴ / ₅ "	6 ¹ / ₂ "						

Wide Mouth Boot Tee

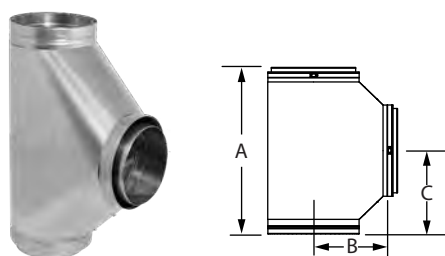


Use to transition from horizontal to vertical with improved flue gas flow with angled gradual transitions. Can also be used as a manifold connection to gang boilers into a common vent. Completely welded inner walls.

SIZE	ORDER #	STOCK #	A	B	C	SIZE	ORDER #	STOCK #	A	B	C
4"	W2-WBT4	810003689	15 ³ / ₄ "	7"	6 ⁹ / ₁₀ "	12"	W2-WBT12	810003840	23 ³ / ₄ "	11"	10 ⁹ / ₁₀ "
5"	W2-WBT5	810003710	16 ³ / ₄ "	7 ¹ / ₂ "	7 ⁴ / ₁₀ "	14"	W2-WBT14	810003865	25 ³ / ₄ "	12"	11 ⁹ / ₁₀ "
6"	W2-WBT6	810003731	17 ³ / ₄ "	8"	7 ⁹ / ₁₀ "	16"	W2-WBT16	810003888	27 ³ / ₄ "	13"	12 ⁹ / ₁₀ "
7"	W2-WBT7	810003752	18 ³ / ₄ "	8 ¹ / ₂ "	8 ⁴ / ₁₀ "	18"	W2-WBT18	810003909	29 ³ / ₄ "	14"	13 ⁹ / ₁₀ "
8"	W2-WBT8	810003772	19 ³ / ₄ "	9"	8 ⁹ / ₁₀ "	20"	W2-WBT20	810003926	31 ³ / ₄ "	15"	14 ⁹ / ₁₀ "
9"	W2-WBT9	810003795	20 ³ / ₄ "	9 ¹ / ₂ "	9 ⁴ / ₁₀ "	22"	W2-WBT22	810003943	33 ³ / ₄ "	16"	15 ⁹ / ₁₀ "
10"	W2-WBT10	810003815	21 ³ / ₄ "	10"	9 ⁹ / ₁₀ "	24"	W2-WBT24	810003959	35 ³ / ₄ "	17"	16 ⁹ / ₁₀ "

Double-Wall Wye

new sizes available

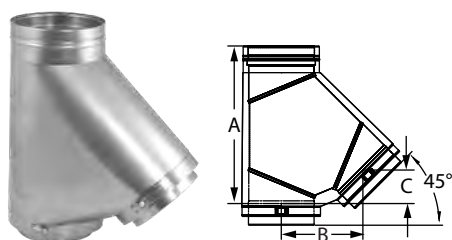

Use in place of any M&G DuraVent tee for a 45° angle instead of 90°; can be used as a manifold connection to gang multiple boilers into a common vent.

SIZE	ORDER #	STOCK #	A	B	C
6"	W2-WYE06	810004863	14 ¹ / ₂ "	7 ¹ / ₂ "	3 ¹ / ₁₀ "
7"	W2-WYE07	810007021	16 ¹ / ₃ "	8 ³ / ₅ "	3 ¹ / ₂ "
8"	W2-WYE08	810004864	18"	9 ⁷ / ₁₀ "	4"
9"	W2-WYE09	810007022	19 ⁷ / ₁₀ "	10 ⁷ / ₁₀ "	4 ² / ₅ "
10"	W2-WYE10	810004865	21 ² / ₅ "	11 ⁴ / ₅ "	4 ⁹ / ₁₀ "
12"	W2-WYE12	810004866	24 ⁹ / ₁₀ "	14"	5 ⁴ / ₅ "
14"	W2-WYE14	810004867	28 ³ / ₁₀ "	16 ¹ / ₁₀ "	6 ³ / ₅ "
16"	W2-WYE16	810009327	--	--	--
22"	W2-WYE22	810007545	--	--	--
24"	W2-WYE24	810007546	--	--	--

Appliances and Adapters ***updated information***

Manufacturer	Model	Appliance Adapter	Termination Adapter
Aerco International	Benchmark 2.0 GWS, 3.0 LN	FSA-AE8	
	KC-1000	FSA-AE6	
	Modulux Series	Standard Vent Pipe 4", 6"	
Ajax	Atlas GS Series	FSA-HFA6, 8	
	A250, A300	FSAAU12	
A.O. Smith	Burkay Genesis Series	FSA-HFA4 a, 5 a	
	Legend 2000 Series	FSA-HFA6 a, 7 a	
	ProStar Series	FSAAU4	
	GB/GW 400, 500	FSAAU6	
	GB/GW 1000	FSAAU10	
	GB/GW 1300, 1500	FSAAU12	
	GB/GW 1850, 2100	FSAAU14	
	GB/GW 2500	FSAAU16	
	GB/GW 300	FSAAU10	
	GB/GW 650, 750	FSAAU8	
	ATI 705-N	FSAAU4	
	ATIO 910-N	FSAAU5	
	Cyclone BTH-150	FSA-PVC3	
	Cyclone BTH-300, 400, 500	FSA-PVC4	
	VW-750	FSA-HFA6	
	VW-1500	FSA-HFA7	
Aerco	Benchmark 1.5	FSA-AE6	
	Benchmark 750	FSA-AE6	
	Benchmark 1000	FSA-AE6	
	Benchmark 3000	FSA-AE8	
	Benchmark 6000	FSA-AE14	
	Esteem 399 (tankless)	FSA-ULT4	
Atlas	300	FS34I	
Beacon/Morris	BRU Series	FSAAU4	
	BTU Series	FSAAU4, 5, 6	
Bosch	Aquastar 125 FX	FSA-LMGD4 a	
	Aquastar GHW-635-ES	Standard Vent Pipe 3"	
	Aquastar 250SX	Standard Vent Pipe 3"	
	Aquastar 240FX	FSAAU3	
	AquaStar 2400ES	FSAAU4	
	AquaStar 2700ES	FSAAU4	
	GWH 42SEF	FSAAU4	
	660 EF	FSAAU3	
Bradford-White	EF Series	FSA-PVC3	
Bryan	AB Series	FSAAU	
Buderus	G115 Series	FSAAU4 or FSAAU5	
	G124X Series	FSAAU5, 6	
	G-515/ 7-12	FSAAU10	
	GA124 Series	FSAAU3	
	GA244/37, 44, 53	FSAAU3	

Buderus	GA244/62	FSAAU4	
	GB142 Series	FSAAU3	
	GB312/90 to GB312/160	FSA-158-6F	
	GB312/200 to GB312/280	FSA-197-8F	
	SB615 Series	FSA-SB7, 8, 10, 12	
Burnham	SB735 Series	FSA-SB14	
	Independence PV	FSA-HFB3 b	FSA-PV3
	Minute Man II	FSA-HFB3 b	FSA-PV3
	Revolution	FSA-HFB3 b	FSA-PV3
	Revolution II	FSA-HFB3 b	FSA-PV3
	Series 2PV	FSA-HFB3 b	FSA-PV3
	Spirit	FSA-HFB3 b	FSA-PV3
	PVG/SCG Series	FSA-HFB3 b, 4 b	
	V11 Series	FSAAU8, 10, 12, 14, 16	
	V905	FSAAU8	
	ALP 150	FSA-PVC3	
	ALP 285	FSA-PVC4	
	ALP 399	FSA-PVC4	
	ALP 500	FSA-PVC4	
Camus Boiler	MicoFlame Series I	FSAAU3, 4, 5, 6	
	MicoFlame Series II	FSAAU8, 10, 12	
	MicoFlame Grande Series	FSAAU12, 14	
	DynaFlame Series	FSAAU6, 8, 10, 12, 14	
Camus	DynaMax	Standard Vent Pipe 6"	
	DynaForce 1000	FSAAU6 or 7	
	DynaForce 1600	FSAAU7	
Carel	Humidifier UG 180	FSAAU5	
Cleaver Brooks	MCF Series	FSA-MCF6, 8, 10, 12	
	FLX Series	FSA-FLX10, 12, 16	
	CFC 500	FSAAU6	
	CFC 1000	FSA-MCF8	
	CFC 1500	FSAAU10	
	CFC 1800	FSA-MCF12	
Columbia	CFC 2500	FSAAU12	
	Patriot Series-Direct Vent	FSA-UTC4	
Crown Boiler Co.	Bali BWF-061, 095, 128, 162	Standard Vent Pipe 3" a	FSA-M3 a
	Bali BWF-195, 229	Standard Vent Pipe 4" a	FSA-M4 a
	Bimini BWC150, 225	Standard Vent Pipe 3" a, 4" a	FSA-M3, 4 a
	Bimini 300, 399, 425	Standard Vent Pipe 4" 5"	FSA-M3 a
	CWD 083	FSAAU3	
	BWF-095/ 128/ 162	Standard Vent Pipe 3"	
	BWF-195/ 229	Standard Vent Pipe 4"	
	Cabo CSC-050 thru 150	Standard Vent Pipe 3" a	
	Cabo CSC-175, 200	Standard Vent Pipe 3" a, 4" a	FSA-M3 a
	Cabo II CWD060-245	FSA-HFA3, 4	

Appliances and Adapters ***updated information***

Manufacturer	Model	Appliance Adapter	Termination Adapter
Dunkirk	XEB-2 thru XEB-5	FSAMETEK3	FSA-M3 a
	XEB-6 thru XEB-7	FSAMETEK3	
De Dietrich	GT334A, GT335A, GT336A	FSAAU7	
	GT337A, GT338A, GT339A	FSAAU8	
	GT430-8A to GT430-10A	FSAAU10	
	GT430-11A to GT430-14A	FSAAU12	
	GT-530-22 thru -25	FSAAU18	
	Series 334,335, 336	FSAAU7	
	Series 337,338, 339	FSAAU8	
	Series 430-11, -12, -13,-14	FSAAU12	
	Series 430-8, -9, -10	FSAAU10	
	Series 310-5,-6, -7, -8, -9	FSAAU10	
	C-230 ECO	FSA-149-6F	
	C-130 ECO	FSA-250-10F	
	C-230 ECO	FSA-149-6F	
	C-310	FSA-250-10F	
EcoTemp	40HI tankless	FSAAUUCD3	
Fulton Boiler Works	EDR 750-1500 / 2000	FSA-FULTEDR-6FNSF, FSA-FULTEDR-8FNSF	
	PulsePak PHW Series	FSA04T2.5, FSA06T2.5	
	Vantage VTG3000	FSAAU12	
	PHW 2000	FSA06T2.5	
	PHW 1400	FSA04T2.5	
	Vantage VTG 4000 / 6000	FSAAU14	
GasMaster	GMI Series	FSAAU4, 6, 8, 12	
Hamilton	EVO 299, 399, 599	Standard Vent Pipe 4" 5"	
Hayward Pool	H250 FD	FSA-HFA6	
	H300 FD, H350 FD, H400 FD	FSA-HFA8	
HydroTherm	HI Series	FSAAU4	
	ID Series	FSAAU4	
	IHS Series	FSAAU4	
	KN-2	FSA-HFA3	
	KN-4	FSA-HFA4	
	KN-6	FSA-HFA5	
	KN-10 600, 1000, 2000	FSA-HFA4 a, 6 a, 8 a	
	KN-16	Standard Vent Pipe 6"	
	KN-20,30	Standard Vent Pipe 8"	
	Sabre FX Series	FSA-ELB3, 4	
Jandy	Hi-E2 model 350	FSAAU4	
	Hi-E2 model 220	FSAAU3	
	Pool heater 250	FSAAU6	
	Pool heater 300	FSAAU7	
	Pool heater 400	FSAAU8	

Laars	Endurance EBP	FSA-B3 a	
	Endurance EDP	FSA-B3 a	
	Magna Therm 2000	FSAAU8	
	Magna Therm 3000	FSAAU10	
	Magna Therm 4000	FSAAU12	
	Mascot	FSA-80MM3	
	Mini Combo id Series	FSAAU4	
	Mini Therm JVi	FSA-LMGD4 a	
	Pennant Series	FSAAU6, 8, 10, 12	
	Rheos 1200 - 2400	FSAAU6, 7, 10 a	
	Rheos Plus 1200 - 2400	FSAAU6, 7, 10 a	
	Summit 200, 250	FSA-PVC3	
	NeoTherm 285	Standard Vent Pipe 4"	
	NeoTherm 399, 500, 600	FSA-4PVC-4FNS	
	NeoTherm NT 750, 850	Standard Vent Pipe 6"	
	MightyTherm 2	FSAAU	
Lennox	CMWB 2, 3, 4, 5, 6, 7	Standard Vent Pipe	
	CXE 2, 3, 4, 5, 6, 7	Standard Vent Pipe	
Lochinvar	AWN 286- 601	FSA-4PVC-4FNS	
	Copper Fin CBN	FSAAU6, 8, 10, 12, 14	
	Copper Fin II CHN	FSAAU6, 8, 10, 12, 14	
	Crest 500	Standard Vent Pipe 7"	
	Crest 2000	Standard Vent Pipe 8"	
	Crest 2500	Standard Vent Pipe 9"	
	Crest 3000	Standard Vent Pipe 10"	
	Crest 3500	Standard Vent Pipe 10"	
	Crest 4000	Standard Vent Pipe 12"	
	Crest 5000	Standard Vent Pipe 14"	
	Efficiency+ EBN 100	FSA-PSC/DE3 a	
	Efficiency+ EBN 150, 200	FSAAU4	
	Efficiency+ EBN 250, 300	FSAAU5	
	ERN 252, 302, 402	FSAAU6	
	IWN 1500	FSAAU6	
	Knight 51-211	FSA-23803-FNS	
	Knight	FSA-PVC3, 4	
	Kight XL 399 thru 600	FSA-4PVC-4FNS	
	Kight XL 700 thru 800	FSA-6M-6PVC ELB	
	Intelli-Fin IBN 1500 thru 2000	FSA-200mm8/FSA150mm6	
	Power-Fin PBN 501 thru 2000	FSAAU7, 8, 9, 10, 12	
	Power-Fin PFN 501 thru 2000	FSAAU7, 8, 9, 10, 12	
	Shield 285 - 500	FSA-4PVC-4FNS	
	SYNC SBN 1000, 1300, 1500	Standard Vent Pipe 6"	
	Efficiency EWN 300	FSAAU6	

Appliances and Adapters ***updated information***

Modine	BDP	Standard Vent Pipe 3" a d	FSA-M3 a
	Model HDS30, 45, 60, 75	FSAAU3, 4	FSA-M3, 4 a
	PDP	Standard Vent Pipe 3" a d	FSA-M3 a
Navien	CC240, CC240A	FSA-PVC4	
New Yorker	PVCG Series	FSA-HFB3 b	FSA-NYV3 a
Nordyne	FG6RA Series	FSAAU3, 4, 5	
	FG6RC-045	FSA-PVC3 a	
Nortec	GS Series 100 thru 600	FSAAU3, 4, 5, 6	
	GH Series 100 thru 400	FSAAU3, 4	
	N-0531S	FSA-APD3	
	N-0631S	FSAAU4	
Noritz	N-0751M	FSAAU4	
	N-0751M-DV	FSAAU4	
	N-0931M	FSAAU4	FSA-NSC4
	N-0931M-DV	FSAAU4	
	N-0931M ASME	FSAAU4	
	N-0931M-DV ASME	FSAAU4	FSA-NSC4
	NH-1501-DV ASME	FSAAU4	FSA-NSC4
	NH-2001-DV ASME	FSAAU4	
	N-1321M	FSAAU5	
	NC 380	FSAAU5	
	N 0531S	FSA-APD3	
	NR66	FSAAN03	
	NR-71	FSAAU4	
	NR 89SV	FSAAU4	
Paloma	N069M	FSAAU4	
	PH28RIFSN/P	FSAAU4	
	PH28CIFSN/P	FSAAU4	
	PH20RIFSN/P	FSA-RI-4.2	
	PTG42PVN/P	FSA-RI-4.2	
	PTG-74 PVN	FSAAU4	
Patterson-Kelley	P-K Thermific Series	FSAAU10, 12	
	P-K Modu-Fire Series (except FD)	W2-AA10, 12	
	P-K Modu-Fire FD	FSAAU6, 8	
	P-K MACH c-300, 450, 900, 1050	FSA-PK4, 5, 8, FSA-HFA10	
	P-K MACH c-750	FSA-PKT6 or Standard Vent Pipe 6"	
	C1500 & C2000	FSA-250-10F	
Peerless	Cast 92-4	FSA-HFA4	
	DE Series	FSA-PSC/DE3 a	
	PDE Series	FSA-PDE3 a	
	PSC Series	FSA-PSC/DE3 a	
	PSC II Series	FSA-HFA3	
	PF-210	FSA-3PVC-M-3FNS	
	PF-399	FS1610TR	
	PF850, PF-1000	Standard Vent Pipe 6"	

Pennco	FSB Series	FSAMETEK3	
Pentair	MiniMax NT, MasterTemp	std. 4" avl w/ RTV & stepped increaser	
PVI	Power VT Series	FSA-HFA4 a	
	Platinum 399	FSA-PVC4	
	1400N 250A-PV	FSA-PVC4	
	TurboPower 500N 25A-TP	FSAAU5	
	TurboPower 750N- 1500N	FSAAU6	
Quietside	QVM8 Series	FSAAU3	FSA-PV3
	DPW 199	FSA-PVC4	
	DPW 120A	FSA-PVC3	
Raypak	Advanced Design Boiler ADB-500	FSAAU6	
	ADB-750 thru 1501	FSAAU8, 10, 12	
	Hi Delta 122 thru 2342	FSAAU4, 5, 6, 8, 12, 14, 16	
	MVB 1003	FSAAU6	
Raypak	MVB 2003, 1753, 1503, 1253	FSAAU8	
	Pool heater CR-406A	FSAAU9	
	Pool heater CR-336A	FSAAU8	
	Pool heater CR-266A	FSAAU7	
	Pool heater CR-206A	FSAAU6	
	Pool heater P-514	FSAAU10	
	X-Therm WH-1505, 2005	FSAAU8	
	X-Therm WH-1005	FSAAU6	
	X-Therm H2005	FSAAU8	
	Xfyre 300, 400, 500	FSA-ULT4	
RBI	Fusion Series	FSA-HFA	
	Futura II Series	FSA-HFA	
	Futura III Series	FSA-HFA	
	Dominator Series	FSA-HFA	
	LCD Dominator Series	FSA-HFA	
Rheem/Ruud	RTG-42PVN (Pronto 4.2)	FSA-RI-4.2	
	RTG-74 (Pronto 7.4)	FSAAU4	
	RL-75i	FSAAU4	
Slantfin	Caravan Series	FSA-HFA3 a	
	Concept 21 Series	FSA-HFA3 a	FSA-NYV3 a
	Prodigy 21	FSA-HFA3 a	
	Victory VSPH Series	FSA-HFA3 a	
	Victory II Series	FSA-HFA3 a	
Smith	HB 28A	FSAA18	
	Series 19A -5, -6	FSAAU8	
	Series 19A -7	FSAAU9	
	Series 19A -8, -12	FSAAU10	
	Cast Iron- 28A	FSAAU	
Smith Cast Iron	GV100 Series	FSA-SMITH4	
	Lexington GS110 Series	FSA-ELB3, 4	
	GT 200	FSAAU3	


4" PVC to 4" FasNSeal
Appliance Adapter



SIZE	ORDER #	STOCK #	A
4"	FSA-4PVC-4FNS	810004019	5 1/2"

6" Fulton EDR 750-1500 to 6" FasNSeal Appliance Adapter


new product



SIZE	ORDER #	STOCK #	A
6"	FSA-FULTEDR-6FNSF	810010020	5.9"


8" Fulton EDR 2000 to 8" FasNSeal Appliance Adapter

new product




SIZE	ORDER #	STOCK #	A
6"	FSA-FULTEDR-8FNSF	810010021	5.9"

Aerco International
Appliance Adapter

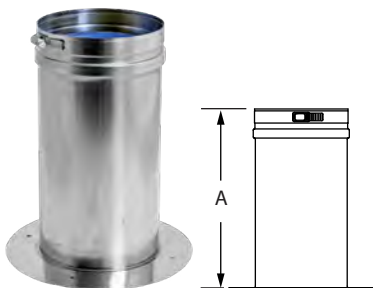


SIZE	ORDER #	STOCK #	A
6"	FSA-AE6	810004022	11 4/5"
8"	FSA-AE8	810004023	11 4/5"

Burnham & Quietside Termination Appliance Adapter



SIZE	ORDER #	STOCK #	A
3"	FSA-PV3	810004057	3"


PVC to FasNSeal Appliance Adapter



SIZE	ORDER #	STOCK #	A
3"	FSA-PVC3	810004020	5 1/2"
4"	FSA-PVC4	810004021	5 1/2"


Rheem/Ruud RTG & Paloma PTG/PH Series Appliance Adapter

updated order #



SIZE	ORDER #	STOCK #	A
3"	FSA-RI-4.2	810004058	3"

Buderus SB Series Appliance Adapter

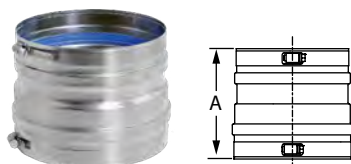

SIZE	ORDER #	STOCK #	A
7"	FSA-SB7	810004059	6"
8"	FSA-SB8	810004060	6"
10"	FSA-SB10	810004061	6"
12"	FSA-SB12	810004062	6"
14"	FSA-SB14	810004063	6"

PolyPro®

**Polypropylene venting products for
high-efficiency condensing
appliance installations.**

Chloride free, environmentally safe.

Listed to ULC-S636.



PolyPro[®]

new step-by-step instructions

M&G DuraVent is dedicated to one thing: focusing on the design and manufacturing of venting products. As experts in this industry, our team is passionate about creating innovative, quality products. We invest in equipment with the latest technology to develop and test venting products that are engineered to one standard: excellence. All measuring equipment is calibrated to the same levels as used by testing agencies and are compliant with ISO 17025, the test-laboratory standard.

Wind Tunnel Laboratory

The wind tunnel lab allows us to gather precise data with 270 degrees of measurement on terminations. All data is analyzed for product performance under rigorous conditions before going to market.

Rain Testing

M&G labs test the vapor/moisture barrier of products by subjecting them to extreme rain and wind conditions. These tests are compliant with both the US and Canadian requirements as well as the stringent European standards.

Climate Testing

M&G labs have developed a patented ice testing system in the climate room. Tests run to -4°F (-20°C). PolyPro vertical terminations are engineered to remain icicle free.

Commercial and OEM Product Development

M&G DuraVent engineers are expertly skilled to develop venting components to OEM specs. To satisfy specific venting requirements, DuraVent has the experience to provide custom design, prototyping and testing of vent systems and components engineered to the demands of specific appliances.

The PolyPro Commercial Difference

- Available in 5in. (130mm), 6in. (150mm) and 8in. (200mm) diameter.
- Completely smooth inner wall for optimal flow performance.
- Components designed for complete discharge of condensate.
- Design allows for system distance adjustment from the back of the appliance.
- Sizing services available to help in calculating required vent size.


Improved PolyPro Locking System



Step 1



Step 2

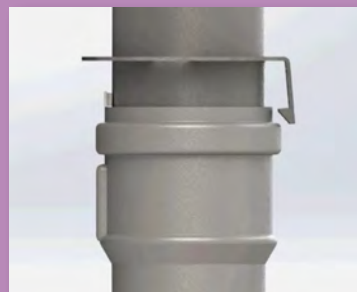


Step 3




Step 4




updated typical installations

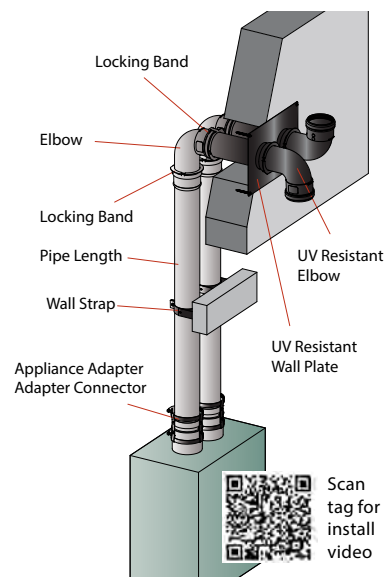


Horizontal Twin Pipe Elbow Termination

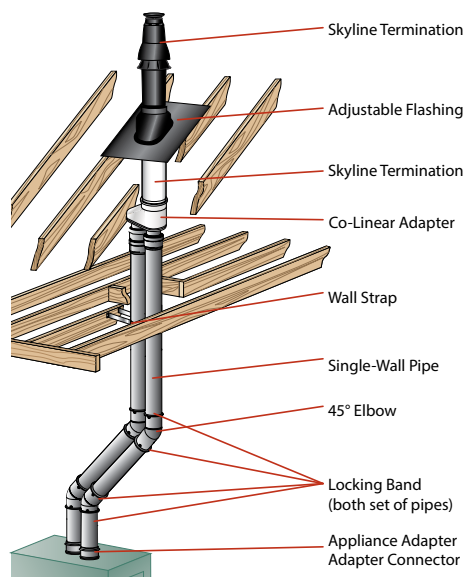


Twin Pipe with Concentric Termination

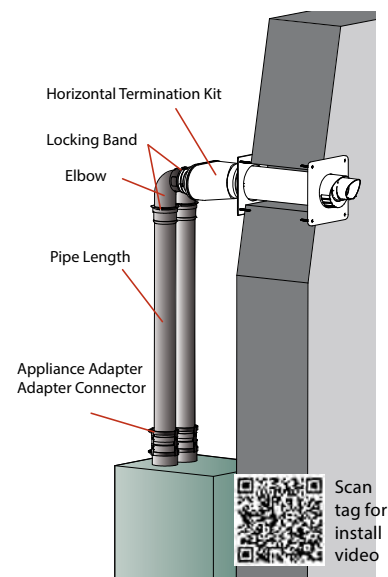


Horizontal Twin Pipe Concentric

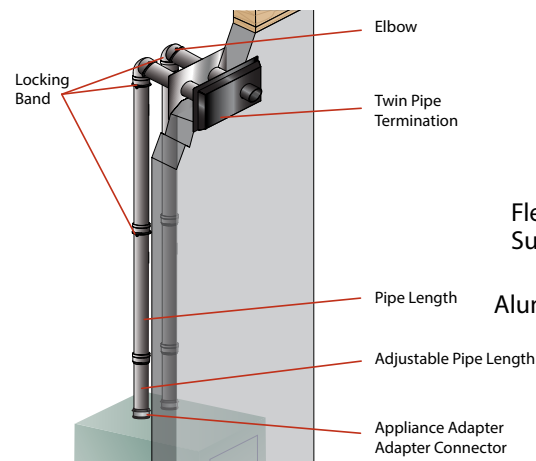

Horizontal Twin Pipe Below Grade

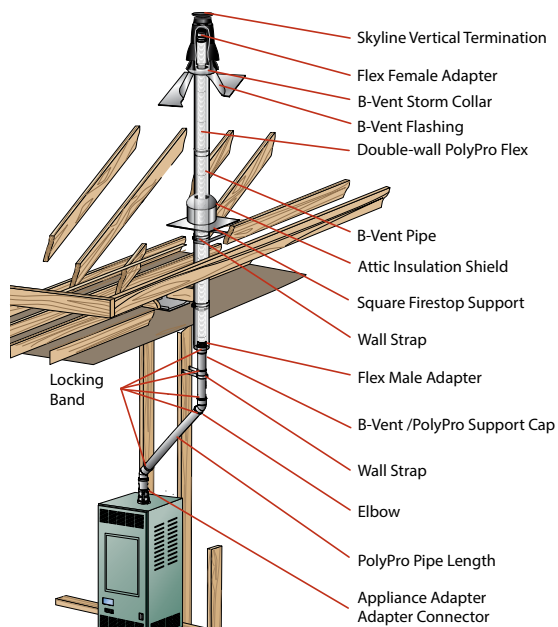

Flex Through B vent as a Chase

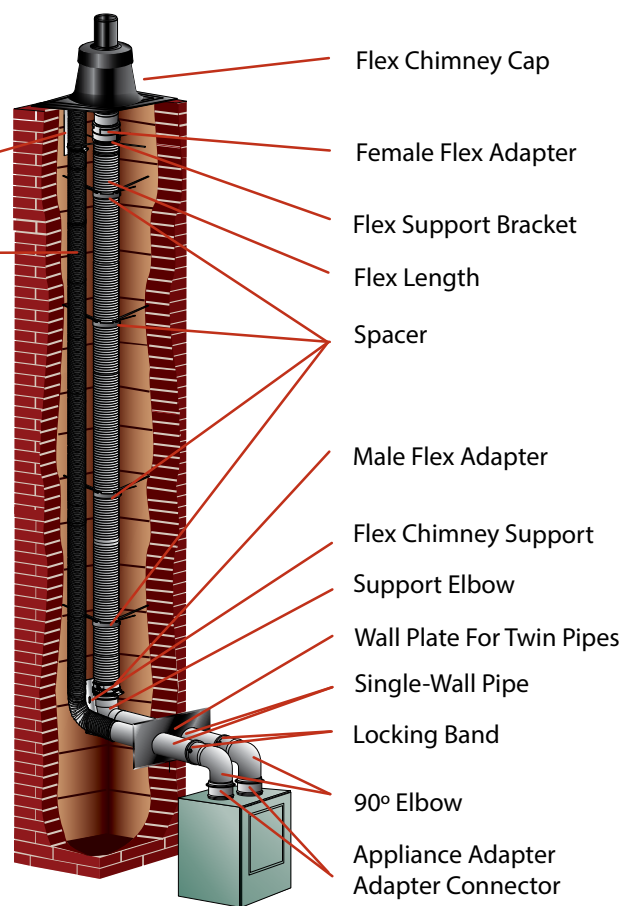

Flex Through Chimney w/Air Intake


See PolyPro Flex section for information on how to create your own air intake kit.



PolyPro Venting System

Single-Wall Pipe

updated photo and description




Use to vent condensing appliances. 2" | 60mm of overlap at the joint. Listed to ULC S636. Locking Bands are required at all joint connections 2"-4" diameters. Includes 1 Locking Band.

SIZE	12" 305mm		36" 914mm		72" 1829mm	
	ORDER #	STOCK #	ORDER #	STOCK #	ORDER #	STOCK #
2" 60mm	2PPS-12L	810009667	2PPS-36L	810009669	2PPS-72L	810009671
3" 80mm	3PPS-12L	810004129	3PPS-36L	810009696	3PPS-72L	810009698
4" 100mm	4PPS-12L	810009723	4PPS-36L	810004174	4PPS-72L	810004176
5" 130mm	5PPS-12L	810009755	5PPS-36L	810009756	5PPS-72L	810009757
6" 150mm	6PPS-12L	810009772	6PPS-36L	810009774	6PPS-72L	810009776
SIZE	40" 1016mm		75" 1905mm			
	ORDER #	STOCK #	ORDER #	STOCK #		
8" 200mm	8PPS-40L	810009793	8PPS-75L	810009794		

Black UV Resistant Single-Wall Pipe

updated photo and description




Use to vent condensing appliances. 2" | 60mm of overlap at the joint. Listed to ULC S636. Made of UV resistant polypropylene. Includes 1 Locking Band.

SIZE	12" 305mm		36" 914mm	
	ORDER #	STOCK #	ORDER #	STOCK #
2" 60mm	2PPS-12BL	810009668	2PPS-36BL	810009670
3" 80mm	3PPS-12BL	810009695	3PPS-36BL	810009697
4" 100mm	4PPS-12BL	810009724	4PPS-36BL	810004175
6" 150mm	6PPS-12BL	810009773	6PPS-36BL	810009775

Adjustable Pipe

updated photo and description

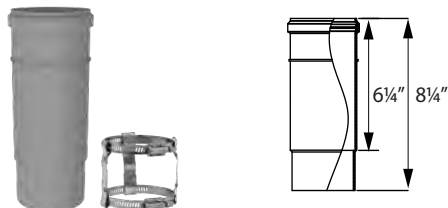


Use to add length to straight length of PolyPro pipe. Slips over standard single-wall pipe length. 4 1/2" | 114mm of adjustment. Adjustable pipe not available in 8" | 200mm diameter. Includes 1 Adapter Connector clamp.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-AVLL	810009674	5" 130mm	5PPS-AVLL	810009759
3" 80mm	3PPS-AVLL	810009702	6" 150mm	6PPS-AVLL	810009778
4" 100mm	4PPS-AVLL	810009731			

Test Port

updated photo and description




Use to test for proper appliance operation without penetrating or disconnecting the vent wall. Install immediately above the appliance. Includes 1 Locking Band.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-TPL	810009690	5" 130mm	5PPS-TPL	810009769
3" 80mm	3PPS-TPL	810009718	6" 150mm	6PPS-TPL	810009789
4" 100mm	4PPS-TPL	810009751	8" 200mm	8PPS-TPL	810009805

45° Elbow

updated photo and description

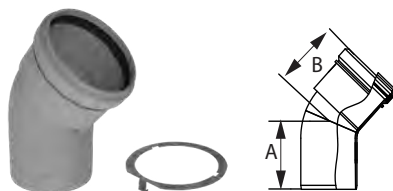


Offsets around obstructions as needed. Includes 1 Locking Band.

SIZE	ORDER #	STOCK #	A	B
2" 60mm	2PPS-E45L	810009675	2 7/8" 72.5mm	2 11/16" 69mm
3" 80mm	3PPS-E45L	810009703	2 7/8" 73mm	2 7/8" 73mm
4" 100mm	4PPS-E45L	810009733	2 13/16" 78mm	2 13/16" 78mm
5" 130mm	5PPS-E45L	810009760	3 3/4" 95mm	3 13/16" 98mm
6" 150mm	6PPS-E45L	810009781	3 13/16" 98mm	3 15/16" 101mm
8" 200mm	8PPS-E45L	810009798	4 7/16" 111mm	5 7/16" 131mm

Black UV Resistant 45° Elbow

updated photo and description




Offsets around obstructions as needed. Made of UV resistant polypropylene. May be used for terminations. Order Bird Guard Screen to protect opening. Includes 1 Locking Band.

SIZE	ORDER #	STOCK #	A	B
2" 60mm	2PPS-E45BL	810009676	2 7/8" 73mm	2 11/16" 69mm
3" 80mm	3PPS-E45BL	810009704	2 7/8" 73mm	2 7/8" 73mm
4" 100mm	4PPS-E45BL	810009734	2 13/16" 78mm	2 1/2" 65mm


90° Elbow

updated photo and description

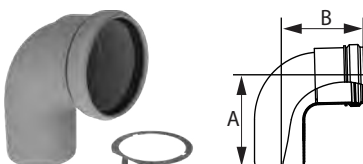

Offsets around obstructions as needed. Includes 1 Locking Band.

SIZE	ORDER #	STOCK #	A	B
2" 60mm	2PPS-E90L	810009677	4" 100mm	4" 100mm
3" 80mm	3PPS-E90L	810004139	4 5/16" 110mm	4 5/16" 110mm
4" 100mm	4PPS-E90L	810009735	4 1/2" 115mm	4 1/2" 115mm
5" 130mm	5PPS-E90L	810009761	6 3/4" 169mm	5 15/16" 152mm
6" 150mm	6PPS-E90L	810009782	7 1/4" 183mm	6 1/2" 166mm
8" 200mm	8PPS-E90L	810009799	8 15/16" 227mm	7 3/4" 195mm

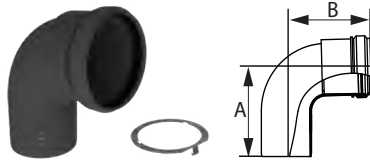Black UV Resistant 90° Elbow***updated photo and description***


Offsets around obstructions as needed. Made of UV resistant polypropylene. May be used for terminations. Order Bird Guard Screen to protect opening. Includes 1 Locking Band.

SIZE	ORDER #	STOCK #	A	B
2" 60mm	2PPS-E90BL	810009678	4" 100mm	4" 100mm
3" 80mm	3PPS-E90BL	810009705	4 5/8" 110mm	4 5/8" 110mm
4" 100mm	4PPS-E90BL	810009736	4 1/2" 115mm	4 1/2" 115mm
6" 150mm	6PPS-E90BL	810009783	7 1/4" 183mm	6 1/2" 166mm

Black UV Resistant Extended 90° Elbow***updated photo and description***

Made of UV resistant polypropylene. May be used for terminations. Order Bird Guard Screen to protect opening. Includes 1 Locking Band.

SIZE	ORDER #	STOCK #	A	B
2" 60mm	2PPS-E90EBL	810009679	14" 358mm	16" 405mm
3" 80mm	3PPS-E90EBL	810009706	14 1/4" 360mm	16 5/8" 415mm
4" 100mm	4PPS-E90EBL	810009737	14 1/4" 360mm	16 1/2" 420mm

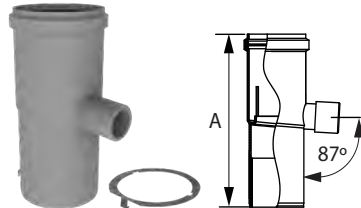Condensate Drain***updated photo and description***

Use to properly manage corrosive condensates common with high efficiency gas appliances. Reference 8PPS-CD for 8" Tee Cap with integrated drain. Includes 1 Locking Band.

SIZE	ORDER #	STOCK #	A	SIZE	ORDER #	STOCK #	A
2" 50mm	2PPS-CDL	810004104	7" 180mm	5" 130mm	5PPS-CDL	810004227	7" 180mm
3" 80mm	3PPS-CDL	810004143	7" 180mm	6" 150mm	6PPS-CDL	810004260	7" 180mm
4" 100mm	4PPS-CDL	810004186	7" 180mm				

Tee Cap

Use cap on Tees, Condensate Drain or on other components where a cap is needed.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-CL	810004103	5" 130mm	5PPS-CL	810004226
3" 80mm	3PPS-CL	810004142	6" 150mm	6PPS-CL	810004261
4" 100mm	4PPS-CL	810004185			


Tee Cap with Condensate Drain

Use cap on Tees, Condensate Drain or on other components where a cap is needed.

SIZE	ORDER #	STOCK #
8" 200mm	8PPS-CDL	810004292

Tee with Cap

updated photo and description

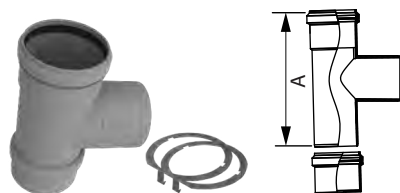


Use for a 90° offset or to combine connections. 8" diameter includes cap. Includes 2 Locking Bands.

SIZE	ORDER #	STOCK #	A	SIZE	ORDER #	STOCK #	A
2" 60mm	2PPS-TL	810009687	7" 180mm	5" 130mm	5PPS-TL	810009767	11" 280mm
3" 80mm	3PPS-TL	810004144	7 7/8" 200mm	6" 150mm	6PPS-TL	810009787	11" 280mm
4" 100mm	4PPS-TL	810009748	8 1/4" 220mm	8" 200mm	8PPS-TL	810009803	13 1/4" 350mm

Black UV Resistant Tee

updated photo and description

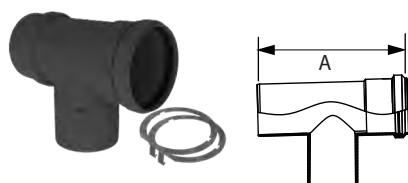

Use as a termination. Made of UV resistant polypropylene. Gasket not included. Order Bird Guard Screen to protect opening. Includes 2 Locking Bands.

SIZE	ORDER #	STOCK #	A
2" 60mm	2PPS-TBL	810009688	7" 180mm
3" 80mm	3PPS-TBL	810009716	7 7/8" 200mm
4" 100mm	4PPS-TBL	810009749	8 1/4" 220mm

Black UV Resistant Termination Tee


updated photo and description



Use as a termination. Manufactured with two female ends to accept Bird Screen on both ends. Use bird screen to protect openings. Made of UV resistant polypropylene. Bird Guard Screens included. Includes 2 Locking Bands.

SIZE	ORDER #	STOCK #
6" 150mm	6PPS-TTBL	810009790


Black Wall Plate



Use to trim wall penetration. Painted black metal with gasket.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-WPBL	810004112	4" 100mm	4PPS-WPBL	810004195
3" 80mm	3PPS-WPBL	810004152			


Black Wall Plate for Twin Pipes

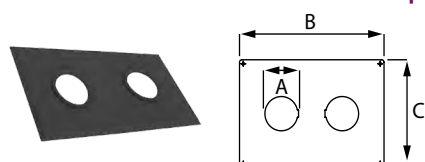

Use to trim wall penetration when using two pipes. Painted black metal with gasket.

SIZE	ORDER #	STOCK #	A	B	C
2" 60mm	2PPS-WPTL	810004113	2" 60mm	11 7/8" 302mm	8 1/2" 216mm
3" 80mm	3PPS-WPTL	810004153	3" 80mm	11 7/8" 302mm	8 1/2" 216mm
4" 100mm	4PPS-WPTL	810004196	4" 100mm	12 7/8" 327mm	8 1/2" 216mm


Tee with Drain Cap

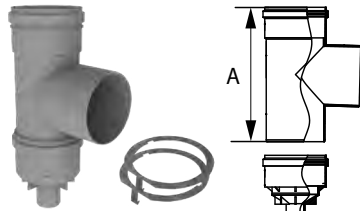updated photo and description

Use to manage condensates at the bottom of a vertical run. Includes 2 Locking Bands.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-TCDL	810009689	5" 130mm	5PPS-TCDL	810009768
3" 80mm	3PPS-TCDL	810009717	6" 150mm	6PPS-TCDL	810009788
4" 100mm	4PPS-TCDL	810009750	8" 200mm	8PPS-TCDL	810009804

Reducer

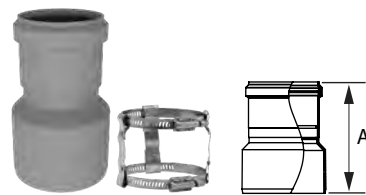updated photo and description

Use to transition the vent system to a smaller diameter. Includes 1 Adapter Connector clamp.

SIZE	ORDER #	STOCK #	A
3" - 2" 80 - 60mm	3PPS-R2L	810009714	5" 130mm
4" - 3" 100 - 80mm	4PPS-R3L	810009746	5" 130mm
5" - 4" 130 - 100mm	5PPS-R4L	810009764	7 5/8" 193mm
6" - 5" 150 - 130mm	6PPS-R5L	810009785	7 3/4" 197mm
8" - 6" 200 - 150mm	8PPS-R6L	810009801	5 15/16" 150mm


Increaser

updated photo and description

Use to transition the vent system to a larger diameter. Install in vertical orientation. Includes 1 Adapter Connector clamp.

SIZE	ORDER #	STOCK #	A
2" - 3" 60 - 80mm	2PPS-X3L	810009694	4 5/16" 110mm
3" - 4" 80 - 100mm	3PPS-X4L	810009722	4 5/16" 110mm
4" - 5" 100 - 130mm	4PPS-X5	810009754	4 5/16" 110mm
5" - 6" 130 - 150mm	5PPS-X6L	810009771	4 5/16" 110mm
6" - 8" 150 - 200mm	6PPS-X8L	810009792	5 3/4" 145mm

6" Fulton EDR 750-1500 to 6" PolyPro Appliance Adapter

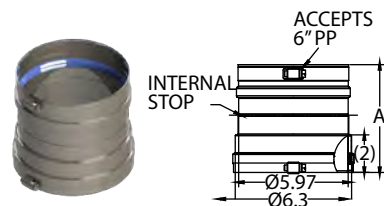new product

SIZE	ORDER #	STOCK #	A
6"	6PPS-FULTEDR-6PPFL	810010023	5.9"

8" Fulton EDR 2000 to 8" PolyPro Appliance Adapter

new product



SIZE	ORDER #	STOCK #	A
8"	8PPS-FULTEDR-8PPFL	810010025	5.9"

Appliance Adapter for PVC Pipe



Use to connect PolyPro vent system to an appliance outlet. Has a double female adapter. One end accepts PVC male pipe and the other accepts PolyPro male pipe. No adapter connector and/or Locking Band required.

SIZE	ORDER #	STOCK #
3" 80mm	3PPS-AD-ML	810007169
4" 100mm	4PPS-AD-ML	810007170

Appliance Adapter for PVC Coupler

updated photo and description



Use to adapt rigid PolyPro pipe length to the inside of the PVC/CPVC coupler or other plastic appliance outlet. Must be used with Adapter Connector for flue gas. Includes 1 Adapter Connector clamp.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-ADL	810009672	4" 100mm	4PPS-ADL	810009728
3" 80mm	3PPS-ADL	810009699			


Female Appliance Adapter



Use to connect PolyPro to a nominal sized pipe with a smooth male end outlet. No adapter connector and/or Locking Band required. Hose clamps on both ends.

SIZE	ORDER #	STOCK #	A	B	C
3" 80mm	FSAAU3-3PPL	810004171	3 1/2" 81mm	3" 80mm	5" 130mm
4" 100mm	FSAAU4-4PPL	810004210	4" 100mm	4" 100mm	5" 130mm
6" 150mm	FSAAU6-6PPL	810004283	5 15/16" 151mm	6" 150mm	5" 130mm
8" 200mm	FSAAU8-8PPL	810004312	7 15/16" 199mm	8" 200mm	5" 130mm


PolyPro to FasNSeal Adapter



Use to transition from PolyPro vent system to FasNSeal vent system or to connect a metric appliance to FasNSeal. Can be used as an appliance adapter or inline. Locking Band required for 3" - 4" diameters, recommended for 5" - 8" diameters.

SIZE	ORDER #	STOCK #	A	B	C
3" 80mm	3PPS-ADM-03FNSFL	810009701	3" 80mm	3 1/8" 79mm	3 13/16" 97mm
4" 100mm	4PPS-ADM-04FNSFL	810009730	4" 100mm	3 1 5/16" 99mm	5 15/16" 151mm
5" 130mm	5PPS-ADM-05FNSFL	810009758	5" 130mm	5 1/8" 131mm	5 15/16" 151mm
6" 150mm	6PPS-ADM-06FNSFL	810009777	6" 150mm	5 15/16" 151mm	7" 178mm
8" 200mm	8PPS-ADM-08FNSFL	810009795	8" 200mm	7 7/8" 199mm	7" 178mm


Adapter Connector

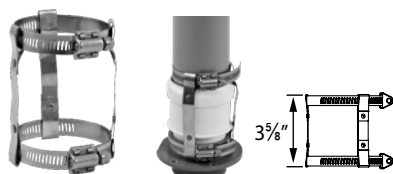

Use to secure PolyPro pipe to PVC/CPVC coupler or appliance outlet. Universal size for 2-4 inch and 5-8 inch systems. M&G DuraVent requires its use with flue gas applications and recommends it with air intake applications.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" - 4"	PPS-PACL	810004128	5" - 8"	PPS-PACL	810004243

Wall Strap - metal

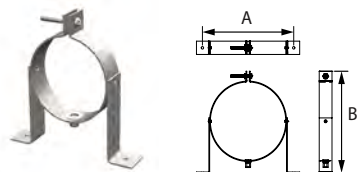

Use to support offsets and pipe used in vertical rise or horizontal runs as per installation instructions. Wall Strap legs can be rotated up to 360° for versatility. Accepts standard 1/4" all-thread. Available in galvanized or stainless steel metals. Note: Vent pipe must be supported at least every 10 feet (3m) vertically. Horizontal or sloped sections of vent pipe require a wall strap on each pipe section.

SIZE	GALVANIZED		A	B	SIZE	STAINLESS STEEL		A	B
	ORDER #	STOCK #				ORDER #	STOCK #		
2" 60mm	2PPS-WSML	810004110	3 5/8" 92mm	4 7/8" 124mm	2" 60mm	2PPS-WSM-SSL	810004111	3 5/8" 92mm	4 7/8" 124mm
3" 80mm	3PPS-WSML	810004150	4 3/8" 112mm	5 1/4" 133mm	3" 80mm	3PPS-WSM-SSL	810004151	4 3/8" 112mm	5 1/4" 133mm
4" 100mm	4PPS-WSML	810004193	5 1/8" 130mm	5 5/8" 143mm	4" 100mm	4PPS-WSM-SSL	810004194	5 1/8" 130mm	5 5/8" 143mm
5" 130mm	5PPS-WSML	810004232	6 3/8" 162mm	6 3/4" 171mm	5" 130mm	5PPS-WSM-SSL	810004233	6 3/8" 162mm	6 3/4" 171mm
6" 150mm	6PPS-WSML	810004266	7 1/8" 181mm	7 5/8" 194mm	6" 150mm	6PPS-WSM-SSL	810004267	7 1/8" 181mm	7 5/8" 194mm
8" 200mm	8PPS-WSML	810004296	9 1/8" 232mm	9 5/8" 245mm	8" 200mm	8PPS-WSM-SSL	810004297	9 1/8" 232mm	9 5/8" 245mm

Locking Band

updated photo and illustration



Use to secure two sections of pipe together. Required to comply with ULC S636 listed installations for 2" to 4" diameters. Locking Bands are recommended for 5" diameter.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-LB2	810004127	4" 100mm	4PPS-LB2	810004206
3" 80mm	3PPS-LB2	810004166	5" 130mm	5PPS-LB2	810004241


Locking Band Clamp



Use to secure two sections of pipe together. Locking Bands are recommended for 5"-8" diameters. Use to secure two sections of PolyPro pipe together. Typically used in vertical installations.

SIZE	ORDER #	STOCK #	A	B
2" 60mm	2PPS-LBCL	810007146	2 3/8" 60mm	2 1/2" 64mm
3" 80mm	3PPS-LBCL	810007147	3 1/8" 80mm	2 1/2" 64mm
4" 100mm	4PPS-LBCL	810007148	4" 100mm	2 1/2" 64mm
5" 130mm	5PPS-LBCL	810004242	5 1/8" 130mm	2 1/2" 64mm
6" 150mm	6PPS-LBCL	810004278	6 1/8" 156mm	2 1/2" 64mm
8" 200mm	8PPS-LBCL	810004306	8 1/8" 207mm	2 1/2" 64mm

Firestop Spacer

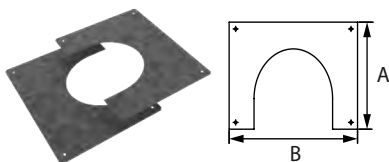


Use when penetrating floor levels. Two piece design for easier installation.

SIZE	SINGLE-WALL PIPE		A	B
	ORDER #	STOCK #		
2" 60mm	2PPS-FSSL	810004115	4" 100mm	7" 178mm
3" 80mm	3PPS-FSSL	810004155	4" 100mm	7" 178mm
4" 100mm	4PPS-FSSL	810004198	4" 100mm	7" 178mm
5" 130mm	5PPS-FSSL	810004234	8 1/8" 206mm	10" 254mm
6" 150mm	6PPS-FSSL	810004269	7 3/4" 197mm	9 3/4" 248mm
8" 200mm	8PPS-FSSL	810004298	10 1/2" 267mm	12 3/4" 324mm
SIZE	CONCENTRIC PIPE		A	B
	ORDER #	STOCK #		
2" 60mm	2PPS-FSL	810004114	7" 178mm	8 3/4" 223mm
3" 80mm	3PPS-FSL	810004154	7 7/8" 200mm	9 7/8" 251mm
4" 100mm	4PPS-FSL	810004197	7 7/8" 200mm	9 7/8" 251mm

Flat Roof Flashing


updated table of information

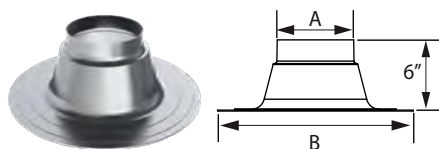

Use to weather-proof the penetration of vent pipe through the roof. For concentric pipe.

SIZE	SINGLE-WALL PIPE		A	B
	ORDER #	STOCK #		
5" 130mm	5PPS-FFL	810007171	5 1/2" 140mm	--
6" 150mm	6PPS-FFL	810004268	6 1/4" 160mm	--
8" 200mm	8PPS-FFL	810004302	8 1/4" 210mm	--
SIZE	CONCENTRIC PIPE		A	B
	ORDER #	STOCK #		
2" 60mm	2PPS-FFL	810004116	4 5/8" 120mm	13 3/4" 350mm
3" 80mm	3PPS-FFL	810004156	5 1/2" 140mm	15 5/16" 390mm
4" 100mm	4PPS-FFL	810004199	6 1/4" 170mm	17" 430mm


Adjustable Roof Flashing 1/2 - 5/12 pitch

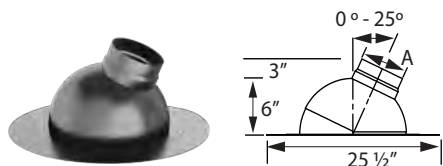

Use to weather proof penetration of vent through the roof. For concentric pipe. Made of aluminum. Adjusts from 0 - 25° (0/12 to 5/12).

SIZE	ORDER #	STOCK #	A
2" x 4" 60 - 100mm	2PPS-F5L	810004117	4" 100mm
3" x 5" 80 - 130mm	3PPS-F5L	810004157	5" 130mm
4" x 6" 100 - 150mm	4PPS-F5L	810004200	6" 150mm


Adjustable Roof Flashing 5/12 - 12/12 pitch

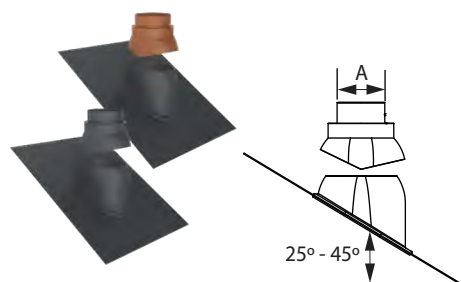

Use to weather proof penetration of vent through the roof. For concentric pipe. Made of polypropylene. Adjusts from 25° to 45° (5/12 to 12/12). Black or terra-cotta. UV resistant.

SIZE	BLACK		A
	ORDER #	STOCK #	
2" x 4" 60 - 100mm	2PPS-F12L	810004118	4" 100mm
3" x 5" 80 - 130mm	3PPS-F12L	810004158	5" 130mm
4" x 6" 100 - 150mm	4PPS-F12L	810004201	6" 150mm
SIZE	TERRA-COTTA		A
	ORDER #	STOCK #	
2" x 4" 60 - 100mm	2PPS-F12-TCL	810004119	4" 100mm
3" x 5" 80 - 130mm	3PPS-F12-TCL	810004159	5" 130mm
4" x 6" 100 - 150mm	4PPS-F12-TCL	810004202	6" 150mm

Twin Pipe Termination

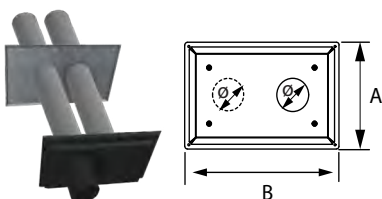


Use to terminate horizontally with two single-wall PolyPro pipes for intake and exhaust. Simple design ensures adequate separation of intake air from exhaust. Termination is painted black. Includes black UV resistant polypropylene exhaust nozzle equipped with Bird Screen, interior wall plate, and two 14" pipe lengths.

SIZE	ORDER #	STOCK #	A	B
2" 60mm	2PPS-HTPL	810009685	8 1/2" 216mm	11 7/8" 302mm
3" 80mm	3PPS-HTPL	810009713	8 1/2" 216mm	11 7/8" 302mm
4" 100mm	4PPS-HTPL	810009745	8 1/2" 216mm	12 1/4" 311mm

Single Horizontal Termination

updated photo and description

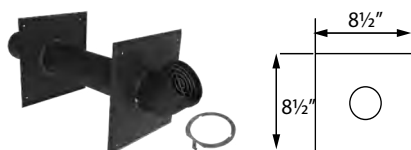

Use to terminate horizontally with one single-wall PolyPro pipe. Termination and wall plate can be rotated to suit application. Elbow is UV resistant black with bird screen. Also includes interior wall plate, and 14" length of pipe. Includes 1 Locking Band.

SIZE	ORDER #	STOCK #
2" 60mm	2PPS-HSTL	810009684
3" 80mm	3PPS-HSTL	810009712

Lochinvar Horizontal Termination Kit

updated photo and description




Use to adapt PolyPro to the IpeX 636 low profile termination. Kit includes 14" pipe welded to an adapter and metal backing plate. Check with appliance manufacturer for approval. (Outer IPEX termination cap not included. Supplied by others.) Includes 1 Locking Band.

SIZE	ORDER #	STOCK #	A	B
2" 60mm	2PPS-HLKL	810009683	14 3/16" 360mm	8 5/8" 220mm
3" 80mm	3PPS-HLKL	810009711	14 3/16" 360mm	8 5/8" 220mm
4" 100mm	4PPS-HLKL	810009743	14 3/16" 360mm	8 5/8" 220mm

Vertical Termination Cap Kit - Concentric

updated photo and description

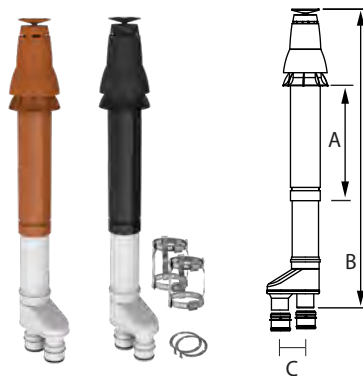


Use for concentric vertical terminations. Includes 2 appliance adapters and co-linear adapter. Black or terra-cotta cap. UV resistant. Includes 2 Locking Bands and 2 Adapter Connector clamps.

SIZE	BLACK		A	B	C
	ORDER #	STOCK #			
2" x 4" 60 x 100mm	2PPS-VKL	810009692	18" 460mm	50 1/4" 1280mm	4 3/4" 121mm
3" x 5" 80 x 125mm	3PPS-VKL	810009720	23" 580mm	53 1/4" 1354mm	4 3/4" 121mm
4" x 6" 100 x 150mm	4PPS-VKL	810009752	23" 580mm	68 1/4" 1735mm	5 1/2" 140mm
SIZE	TERRA-COTTA		A	B	C
	ORDER #	STOCK #			
2" x 4" 60 x 100mm	2PPS-VK-TCL	810009693	18" 460mm	50 1/4" 1280mm	4 3/4" 121mm
3" x 5" 80 x 125mm	3PPS-VK-TCL	810009721	23" 580mm	53 1/4" 1354mm	4 3/4" 121mm
4" x 6" 100 x 150mm	4PPS-VK-TCL	810009753	23" 580mm	68 1/4" 1735mm	5 1/2" 140mm

Horizontal Termination Kit - Concentric

updated photo and description

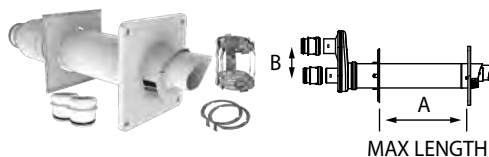

Use for concentric horizontal terminations. Includes 2 appliance adapters, white wall plate, white firestop, and co-linear adapter. White Termination with Bird Guard Screen. UV resistant. Inner plate is 8 5/8" (220mm) square, outer plate is 9 7/16" (240mm) square for all flue sizes. Includes 2 Locking Bands and two Adapter Connector clamps.

SIZE	ORDER #	STOCK #	A	B
2" - 4" 60 - 100mm	2PPS-HKL	810009682	13 3/4" 350mm	4 3/4" 121mm
3" x 5" 80 - 125mm	3PPS-HKL	810009710	13" 330mm	4 3/4" 121mm
4" x 6" 100 - 150mm	4PPS-HKL	810009742	13 3/4" 350mm	5 1/2" 140mm

Bird Guard Screen



Use to protect venting system from birds and rodents. Position inside pipe in place of gasket. Stainless steel. Pack of 6.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-BGL	810004341	4" 100mm	4PPS-BGL	810004367
3" 80mm	3PPS-BGL	810004355	6" 150mm	6PPS-BGL	810004276

EPDM Replacement Gasket



Use as a replacement gasket for rigid PolyPro products. Pack of 12.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-GAL	810004124	5" 130mm	5PPS-GAL	810004237
3" 80mm	3PPS-GAL	810004164	6" 150mm	6PPS-GAL	810004272
4" 100mm	4PPS-GAL	810004204	8" 200mm	8PPS-GAL	810004303

Viton Replacement Gasket




Use as a gasket for oil fuel appliances.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-GAVL	810004126	5" 130mm	5PPS-GAVL	810004238
3" 80mm	3PPS-GAVL	810004165	6" 150mm	6PPS-GAVL	810004273
4" 100mm	4PPS-GAVL	810004205	8" 200mm	8PPS-GAVL	810004304

PolyPro Commercial Venting Components

Vertical Termination for Commercial Systems

updated photo and description

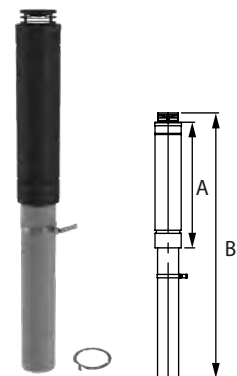


Exhaust termination for vertical through-the-roof applications. PolyPro pipe is protected by a sturdy outer metal pipe and integrated cap. Painted with a durable, powder coated black finish. Includes support hardware, including 1 Locking Band.

To complete vertical termination for commercial systems, installation requires (1) variable pitch roof flashing, (1) support clamp, and (1) storm collar.

SIZE	ORDER #	STOCK #	A	B	O.D.
5" 130mm	5PPS-VTML	810009770	29" 745mm	62" 1575mm	6 3/8" 162mm
6" 150mm	6PPS-VTML	810009791	29" 741mm	62" 1575mm	7 1/4" 184mm
8" 200mm	8PPS-VTML	810009806	32" 800mm	63" 1600mm	9 1/8" 232mm


Variable Pitch Roof Flashing



Use to weather-proof the penetration of vent pipe through the roof. For use with VTM. For pitches of 0/12 - 9/12. Made of stainless steel.

SIZE	ORDER #	STOCK #	A	B
5" 130mm	FSVPF5L	810003241	7"	7"
6" 150mm	FSVPF6L	810003295	8"	7"
8" 200mm	FSVPF8L	810003383	9"	7"

Support Clamp



Use to position the Vertical Termination for Commercial Systems (VTM's) to the variable pitch roof flashing. The clamp is upsized one diameter to fit around the black metal outer pipe.

SIZE	ORDER #	STOCK #	A
5" 130mm	FSCL6L	810003288	1 ½"
6" 150mm	FSCL7L	810003332	1 ½"
8" 200mm	FSCL9L	810003414	1 ½"

Storm Collar




Use to create a weather tight seal between the pipe and flashing. For use with VTM.

SIZE	ORDER #	STOCK #
5" 130mm	FSCPP5L	810007172
6" 150mm	FSCPP6L	810007173
8" 200mm	FSCPP8L	810007174

Horizontal Termination for Commercial Systems


updated description, size, order #, and stock #



Use to terminate through-the-wall applications. 23 degree Elbow termination made with stainless steel and will fit over PolyPro pipe. Includes bird guard. The kit does not contain a PolyPro adapter. No additional Locking Band is required. For assembly, follow enclosed instructions. Available in Stainless Steel.

SIZE	ORDER #	STOCK #
4" 100mm	4PPS-HSTS	810007136
5" 130mm	5PPS-HSTL	810009763
6" 150mm	6PPS-HSTL	810009784
8" 200mm	8PPS-HSTL	810009800

PolyPro Flex Venting Components

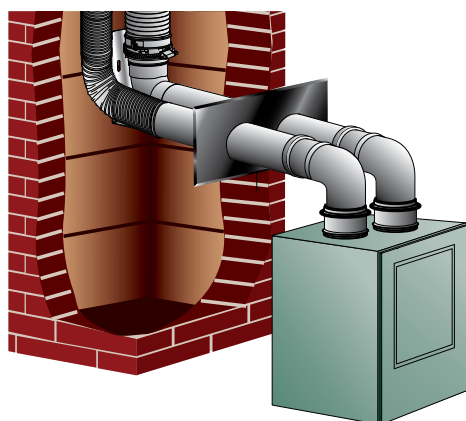

Need An Air Intake Solution? Create Your Own Kit

Order DuraFlex AL length, Hanger Bracket, Coupler and Wall Plate for Twin Pipe. (2" Air intake will require a 2"-3" Increaser: 2PPS-X3)

- (1) DuraFlex AL Length: DFA-25, DFA-35, or DFA-50
- (1) Hanger Bracket: DFA-FCB
- (1) Coupler: DFA-FCP
- (1) Wall Plate for Twin Pipe: PPS-WPT

Flex Chimney Lining Kit

updated photo and description



Use for a vertical flex lining system. Includes black, UV resistant chimney cap, rigid flue vent, flex support bracket, 4 spacers in 3" & 4" kits, male and female flex adapters with gaskets, extended support elbow, wall plate, appliance adapter, Locking Band, and Adapter Connector clamp. Flex sold separately.

SIZE	ORDER #	STOCK #
2" 60mm	2PPS-FKL	810009681
3" 80mm	3PPS-FKL	810009707
4" 100mm	4PPS-FKL	810009738
5" 130mm	5PPS-FKL	810009762


Chimney Cap



Use to vertically terminate a flex system. Black, UV resistant chimney cap with rigid steel flue vent.

SIZE	ORDER #	STOCK #
2" 60mm	2PPS-FCTL	810009680
3" 80mm	3PPS-FCTL	810009810
4" 100mm	4PPS-FCTL	810009811
5" 130mm	5PPS-FCTL	810009812


Vertical Flex Termination Cap

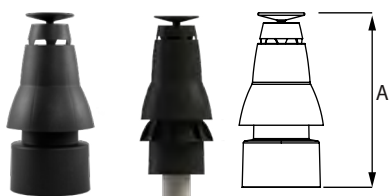

Use to vertically terminate a flex system when using the B-vent retrofit adapters. Includes male and female flex adapters and gaskets. Black, UV resistant. Match the termination size with the diameter of flex you are using.

SIZE	ORDER #	STOCK #	A
2" 60mm	2PPS-VFTL	810009691	13 3/4" 349mm
3" 80mm	3PPS-VFTL	810009719	17" 432mm

B-vent Retrofit Adapters



Use to retrofit any B-vent pipe as a chase for PolyPro flex when an old appliance has been replaced with a new condensing 90+ appliance. Includes adapter to cap, flex/B-Vent lower support, and C-support bracket (required for 3" flex) For venting a single appliance (not for common-venting).

SIZE	ORDER #	STOCK #
2" 60mm in a 4" 100mm chase	2PPS-BV4L	810004333
2" 60mm in a 5" 130mm chase	2PPS-BV5L	810004334
3" 80mm in a 5" 130mm chase	3PPS-BV5L	810004348
2" 60mm in a 6" 150mm chase	2PPS-BV6L	810006999
3" 80mm in a 6" 150mm chase	3PPS-BV6 L	810005874

Support Elbow

updated photo and description



Use the support elbow to stabilize a vertical termination.

Elbow has integrated support base that is compatible with bracket or support shown on the following page. Includes 1 Locking Band.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
5" 130mm	5PPS-SE90L	810009765	8" 100mm	8PPS-SE90L	810009802
6" 60mm	6PPS-SE90L	810009786			

Support Elbow Extended

updated photo and description




Use the extended support elbow to stabilize the vertical termination.

Extended horizontal length can be trimmed to size. Elbow has integrated support base that is compatible with bracket or support shown on the following page. Includes 1 Locking Band.

SIZE	ORDER #	STOCK #	A
2" 60mm	2PPS-SE90XL	810009686	21 1/16" 551mm
3" 80mm	3PPS-SE90XL	810009715	22 1/4" 565mm
4" 100mm	4PPS-SE90XL	810009747	22 7/16" 570mm
5" 130mm	5PPS-SE90XL	810009766	24 7/16" 620mm


Flex or Rigid Support Bracket



Use to secure the Support Elbow or the Extended Support Elbow inside a masonry chimney or chase. Heavy Duty.

SIZE	ORDER #	STOCK #
2"-8" 60mm - 200mm	PPS-SUPL	810004225


Flex Chimney Support



Use to support the Support Elbow inside a masonry chimney or chase. Includes mounting hardware and pipe support clamp.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-SUPL	810004338	4" 100mm	4PPS-SUPL	810004364
3" 80mm	3PPS-SUPL	810004352	5" 130mm	5PPS-SUPL	810004375

Flex Support Bracket



Use to support PolyPro Flex from top of masonry chimney or chase.

SIZE	ORDER #	STOCK #	SIZE	ORDER #	STOCK #
2" 60mm	2PPS-FSBL	810004335	4" 100mm	4PPS-FSBL	810004361
3" 80mm	3PPS-FSBL	810004349	5" 130mm	5PPS-FSBL	810004373