



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____


LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore® Low Lead Utility Spray Valve Assembly

KL50-Y002

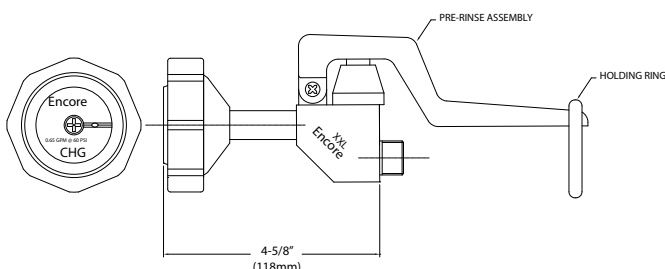

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Approximate shipping weight - 1 lb

Warranty - 3 years parts

Heavy duty utility spray valve assembly designed to withstand demands of foodservice operations

Commercial Quality Features

- Polished chrome plated brass spray valve
- 3.3gpm faceplate
- Ergonomic handle fits comfortably even in small hands; easy to use
- Non-marring, dish sensitive impact resistant bumper
- Reinforced thermoplastic face plate prevents flexing, bumper wear

Specifications:

Utility spray valve assembly to be Encore KL50-Y002.

Utility spray valve assembly to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Handle includes hold-open ring. Non-marring, dish sensitive, impact resistant bumper provides a positive, non-leaking seal made from a heat resistant material that will not fatigue under extreme operating temperatures. Reinforced thermoplastic face plate prevents flexing and premature bumper wear. Faceplate is 3.3gpm with a solid stream spray pattern.

*Note: All flow rates are @ 60psi.

COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD
IN DRINKING WATER ACT" –
2011 – US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

