

COMMERCIAL PRODUCT CATALOG

Effective Feb. 1, 2018



MAKE IT WONDERFUL

FRANKE

commercial-info.us@franke.com

(TEL) 1-855-526-0503

(FAX) 1-866-440-2250

Conditions, Policies and Procedures

Prepaid Freight

Orders of \$2,000 or more of any combination of Franke Commercial sinks and accessories in the continental United States, qualify for prepaid shipments to one destination.

Loss or Damage in Transit On Collect Shipments

Our liability ceases upon delivery of the goods to the carrier at our factory. Claims resulting from damage or loss in transit are **to be made by the consignee against the carrier**. We monitor the performance of our selected carriers to ensure quality service.

Returns Policy

Any returned goods must be accompanied by a RETURN GOODS AUTHORIZATION. If the goods are not defective, a 25% restocking fee will be assessed by our representative upon inspection.

NON-RETURNABLE:

- 1) Custom made sinks.
- 2) Sinks with custom hole drillings (models ending with "/X")
- 3) Obsolete products which are not included in our current book.

For Returns Contact Customer Service:

commercial-info@us@franke.com

Limited Warranty

Franke will, at its option, repair any defective product, replace any defective product or refund the purchase of any defective product covered by the warranty set forth on the LIMITED BUYER WARRANTY page.

Product Certification

Franke Commercial Systems is committed to product certification. We strive to have all our products designed and certified to meet all applicable standards.

Procedure for Custom Sink Ordering

Requests should be accompanied by a thoroughly completed copy of the check list as furnished in the CUSTOM SINKS section. A sketch would be helpful in many cases. Job names and quantities must be provided. A quote will be returned, based on the information you provide. An approval drawing will not

be prepared until we receive a purchase order, at which time we will prepare the drawing and return it for approval by the specifier. Allow up to 48 hours for generation of the drawing. Production will not proceed until Franke Commercial has received the signed approval drawing.

To receive a quotation please contact Commercial Quotation Specialist, Tracy Irvine:

1-855-526-0503 (telephone)

1-866-440-2250 (fax)

commercial-info.us@franke.com (email)

Product specifications are subject to change without notice resulting from occasional changes to product design.

CERTIFICATION REFERENCES THROUGHOUT BOOK

ANSI A117.1 refers to: Accessible and usable buildings and facilities

CSA B651-04 refers to: Accessible design for the built environment

ADA refers to: Americans with disabilities act guidelines. Check local codes to ensure compliance.

LEED Statement

The Green Building Certification Institute (GBCI) team of LEED® Accredited Professionals have performed a benchmark analysis of Franke Commercial Systems' sink ware and determined that these products may:

1. Improve Building Durability
2. Reduce Demand for Raw Materials
3. Improve Indoor Environmental Quality

GBCI believes that several characteristics of Franke Commercial's sinkware are congruent with green building principles and, as such, these products may be considered applicable to high performance buildings and also may contribute meaningfully to green building projects that pursue a LEED® Certification. For full details of your selected product, feel free to contact us.

We reserve the right to modify the dimensions, the manufacture and the models, according to the requirements of development of the products in progress.



Contents



General Information	2
Healthcare	16
Classroom Sinks	28
Corrosion Resistant (Type 316) Sinks	37
Commercial Sinks	
Single Sinks	46
Double Sinks	51
Triple Sinks	54
Undermount Sinks	56
Hand Wash Basins	58
Utility Sinks and Basins	70
Drainboard Sinks	74
Scullery Sinks	76
Sacrarium	87
Urinals & Toilets	88
Washroom Accessories	89
Product Matrix	102
Drain Parts & Fittings	115
Index	116





LIMITED BUYER WARRANTY

Every Franke Commercial sink is guaranteed to be suitable for any normal purpose for which it is intended and without defects in material or workmanship for the following periods of time, provided it has been installed and maintained according to Franke Commercial instructions.

- ☐ Bariatric mirror with shelf
- 5 year warranty
- ☐ Bariatric basins
- 2 year warranty
- ☐ Custom and fabricated products
-1 year warranty
- ☐ Drain fittings and waste parts
-1 year warranty
- ☐ Miranit wall hung sinks, ie) Exos, Medi-flo, Washino
-2 year warranty
- ☐ Sculleries, mops and sewage sampling sinks
-1 year warranty
- ☐ Stainless steel Rodan & EXOS washroom accessories
-5 year warranty, with exception of soap dispensers and electronic parts which is 2 years
- ☐ Stainless steel topmount sinks, undermount, wall mount basins
-5 year warranty
- ☐ Stainless steel urinals and water closets
-2 year warranty

If a product is defective for normal purposes Franke Commercial will provide to the buyer free of charge a replacement product of equal model. A product can be repaired or replaced by returning it to the place of purchase. All costs of such replacement shall be borne by the buyer.

Franke Commercial shall not be liable under this warranty where the product has been used for abnormal purposes or improperly installed or has damage resulting from abuse such as heavy impact, dropped objects or otherwise. Franke Commercial shall not be liable for any inconvenience or expense for material or labor related to removal or replacement of the defective product, or for any loss or damage to any person or property whatsoever resulting from the defective product.

Mirrors may not be cleaned with ammonia or non-standard chemicals. Use of mirror adhesives or placement of mirrors in areas of high humidity will void the warranty.

The provisions of this warranty are not transferable and are in addition to and not in modification of or subtraction from any applicable statutory warranties, rights or remedies.

Some states may not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you.

This warranty gives specific legal rights, and you may also have other rights which vary from state to state.

RESISTANCE CHART - Substance, Conditions, Strength and Temperature	T316	T304	T302
Acetic Anhydride (90%, aerated, 180 degrees F)	B	C	C
Aluminum Fluoride (5%, 70 degrees F)	B	C	C
Aluminum Sulfate (10%, boiling)	A	B	B
Ammonium Bromide (5%, 70 degrees F)	B	C	C
Ammonium Sulfate (10%, boiling)	A	B	B
Bleaching Powder (dry)	A	C	C
Butyric Acid (saturated, boiling)	A	B	B
Calcium Bisulfite (aqueous solution, 300 lbs. pressure, 390 degrees F)	B	C	C
Calcium Hydroxide (50%, boiling)	B	C	C
Calcium Hypochlorite (saturated, 70 degrees F)	A	C	C
Chloroacetic Acid (70 degrees F)	B	C	C
Chlorine Gas (moist, 70 degrees F)	B	C	C
Chromic Acid (50%, boiling)	B	C	C
Ferric Chloride 1%, 70 degrees F)	B	C	C
Fluosiilic Acid 90%, 70 degrees F)	B	C	C
Formic Acid (10%, 180 degrees F)	A	C	C
Hydrochloric Acid (1% or less, 70 degrees F)	B	C	C
Iodine (dry, 70 degrees F)	A	C	C
Lactic Acid (10%, 150 degrees F)	B	C	C
Mercuric Chloride (2%, 70 degrees F)	B	C	C
Oxalic Acid (2.5%, 180 degrees F)	A	C	C
Phosphoric Acid (80%, 230 degrees F)	B	C	C
Salt Brine (70 degrees F)	A	C	C
Sauerkraut Brine (70 degrees F)	A	C	C
Sodium Hydroxide (melting, 600 degrees F)	B	C	C
Stannic Chloride (5%, 70 degrees F)	B	C	C
Sulfuric Acid (5%, 100 degrees F)	A	C	C
Zinc Chloride (saturated, 70 degrees F)	B	C	C

CHEMICAL DATA

A = fully resistant, **B** = fairly resistant, **C** = not resistant.

The chemical data above should be used as a guide to determine the type of stainless steel that will be appropriate for the application. The rating system denotes the level of resistance to corrosion for the different types of stainless steel. For applications involving chemicals or conditions not listed, please consult your local Franke Commercial sales representative.

CORROSION RESISTANCE INFORMATION

Corrosion, or rusting, often reported soon after installation, has two main causes:

1. Contact Corrosion occurs when a piece of common carbon steel, copper, brass or other foreign material contacts the sink and destroys the passive protective film.
2. Pitting or Pinhole Corrosion occurs when chlorides attack the steel forming pits where galvanic cells are created. Acid chlorides are particularly severe, but even chlorine bleach can cause failure. The sink should be rinsed thoroughly after such contact. Type 316 steel should be specified if the sink will be subject to such conditions.

In the presence of oxygen, stainless steel forms a protective chromium oxide layer. This is due to the addition of chromium in excess of 11.5% during the alloying stage. The further addition of nickel, in excess of 7%, gives superior corrosion resistance to the 300 series. Maximum corrosion resistance is obtained with the addition of molybdenum to form TYPE 316, designed to resist attack under highly corrosive conditions.

As implied, stainless steel requires oxygen in order to be stainless. There are ways to make oxygen more plentiful. For example, an acid solution which might otherwise corrode the steel, can be aerated to maintain the protective film.



CUSTOM FABRICATION CAPABILITIES

Franke Commercial has full custom stainless steel fabrication capabilities. We custom fabricate products to meet our customer's specifications. Modifications can be made to most of our standard catalog products. We offer a wide range of custom products. All of our custom fabricated products are polished to a #4 satin finish and can be made to meet the material specification you require (T304 or T316, 14 to 18 gauge). Continuous weld construction is available for pharmaceutical applications if required.

If you can sketch it, we can build it. As a general rule of thumb, the more information we receive with custom fabricated product requests, the better! The following pages provide explicit details for requesting specific types of custom fabricated products.

- ☐ Countertops
- ☐ Topmount & Undermount Sinks
- ☐ Drainboard Sinks
- ☐ Scullery Sinks
- ☐ Wall Mount Hand Wash Stations
- ☐ Surgical Scrub Stations
- ☐ Mop Sinks (Utility)



Application

- With Faucet Ledge:**

- ## SINK BOWL #1

Depth Position (if multiple bowls)



Depth Position (if multiple bowls)



Depth Position (if multiple bowls)

☐ Other _____

☐ 3 1/2" (includes 1140 waste fitting)

☐ 1 1/2" (includes 100 waste fitting)

☐ 1 1/4" (accepts 1 1/4" drain, not included)

☐ Other

☐ Center ☐ Center-Back
☐ Back-Right ☐ Back-Left

- ☐ Integral Overflow
- ☐ Standpipe (1 1/2" drains only)
- ☐ Standpipe & Corner Guard (1 1/2" drains only)

Is a sloped drainboard required: ☐ None ☐ Left ☐ Right ☐ Left & Right

☐ Other (Specify):



Front-to-Back: Left-to-Right:

NOTE: Please include the location of the holes, the number of holes required and the diameter of the holes. Provide a sketch if necessary.

Only 1" bowl radius is available.

Custom Countertop Checklist

Tops are available in all sizes and configurations, with sink bowls integrally welded into the top.



Tops may be flat or slope to the sink. All sloped tops have a 3/16" drop to the sink bowl.

A. THE SINK COMPARTMENT SPECIFICATIONS:

Compartment Size

Front-to-Back: Left-to-Right:

Depth Position (if multiple bowls)

Type of Stainless Steel ☐ T304 ☐ T316

Steel Gauge ☐ 18 ☐ 16 ☐ 14
☐ Other

Drain Fitting: ☐ 3 1/2" (includes 1140 waste fitting)
☐ 1 1/2" (includes 100 waste fitting)
☐ 1 1/4" (accepts 1 1/4" drain, not included)
☐ Other

NOTE: Type 316 wastes are supplied with Type 316 sink bowls.

Drain Position: ☐ Center ☐ Center-Back
☐ Back-Right ☐ Back-Left

Additional Drain Options:

- ☐ Integral Overflow
- ☐ Standpipe (1 1/2" drains only)
- ☐ Standpipe & Corner Guard (1 1/2" drains only)

B. THE COUNTERTOP DETAILS:

The position of the sink compartments will be centered horizontally unless specified otherwise.

Top should be: ☐ Flat ☐ Slope to the sink

NOTE: the maximum sloped area that can be created from the sink bowl outward is 32" (81cm). The remaining top surface to the edge of the sink will be flat.

Backsplash Location(s): ☐ Back ☐ Left ☐ Right

Backsplash Height(s):

Backsplash Style (see Custom Sink Options page)

Rim Style (see Custom Sink Options page)

Overall Dimensions of the top:

Allow a minimum of 2" for rims

Allow a minimum of 1 1/2" for splashes

Allow a minimum of 4" for faucet ledge

Front-to-Back:

Left-to-Right:


Top is to be installed onto:

- ☐ Cabinet - existing or supplied by others
- ☐ Cabinet - to be supplied by Commercial Systems (please provide sketch)
- ☐ Wall with wall hanger and wall mount brackets


Dimension from floor to work surface:

Core Material ☐ Particle Board
☐ Plywood
☐ Channel Construction
☐ Other (specify)

Custom Scullery Sink Checklist



All radius coved corners



Radius coved corners
(Front and Back Only)



A. THE SINK COMPARTMENT SPECIFICATIONS:

of Compartments?

Size of the Compartments:

	Front-Back	Left-Right	Depth
Compartment 1
Compartment 2
Compartment 3

Corner Construction ☐ Radius coved corners-all
☐ Radius coved corners-front and back only

Type of Stainless Steel ☐ Type 304
☐ Type 316

Steel Gauge ☐ 18 ☐ 16 ☐ 14
☐ Other (specify)

Drain Fitting: ☐ 3 1/2" (includes 1140 waste fitting)
☐ 1 1/2" (includes 100 waste fitting)
☐ 1 1/2" duplex complete with stand pipe and guard
☐ 1 1/4" (accepts 1 1/4" drain, not included)
☐ Other (specify)

NOTE: Type 316 wastes are supplied with Type 316 sink bowls.

Drain Position: ☐ Center ☐ Center-Back
☐ Back-Right ☐ Back-Left ☐ Right

B. THE DRAINBOARD SPECIFICATIONS

Drainboard Size: ☐ 24" left to right (typical)
☐ Other (specify)

Drainboard Location: ☐ Left ☐ Right
☐ Left & Right

Rims:

☐ Standard 1 5/8" rolled edges
☐ Other: Type:
Dimensions:

NOTE: Rim options are illustrated on "Custom Sink Options" page.

C. LEDGE AND FAUCET HOLES

Back ledge for deckmount faucet: ☐ Yes ☐ No
Ledge size: ☐ 4" (typical)
☐ Other

Faucet Hole Drilling Requirements:

Please advise

1. the location of the holes
2. the number of holes required
3. and the size of the holes

(Provide a sketch if necessary.)

D. BACKSPLASH

Backsplash Location(s): ☐ Back ☐ Left ☐ Right

Backsplash Height(s):

Backsplash Style:

(See "Custom Sink Options" page)

E. OVERALL DIMENSIONS

Overall Dimensions (Allow 1 5/8" per edge):

Front-to-Back:

Left-to-Right:


F. OTHER

of Legs:


Leg Height: ☐ Standard 35" ☐ Other (specify)

Custom Sink Options


Back / Side Splash Options

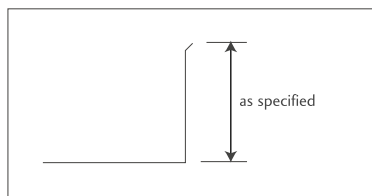


1 - Feathered

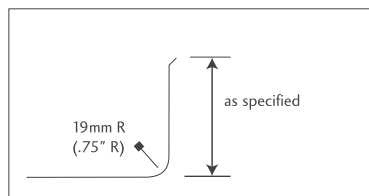


1a - Feathered (Up on Rad)

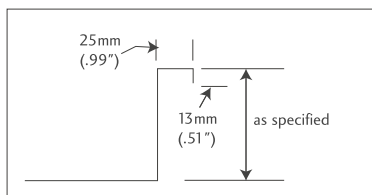


2 - Boxed

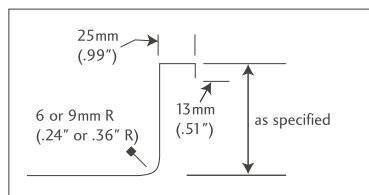


2a - Boxed (Up on Rad)

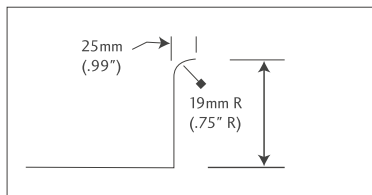


3 - Rolled

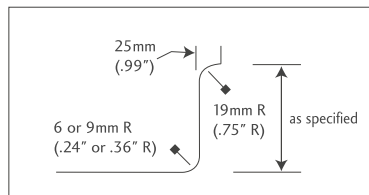


3a - Rolled (Up on Rad)

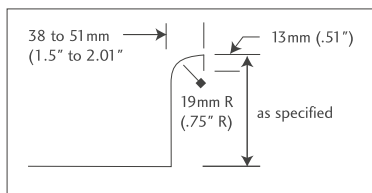


4 - Rolled with return

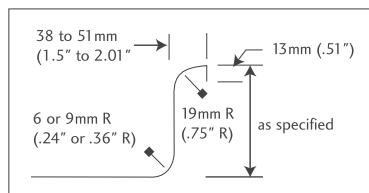

4a - Rolled w/return (Up on Rad)

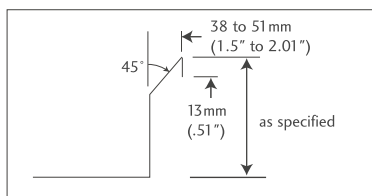


5 - Splayed

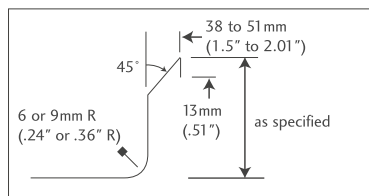


5a - Splayed (Up on Rad)


Rim Style Options




Flat

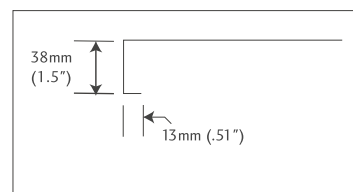


Boxed




Veed Flat

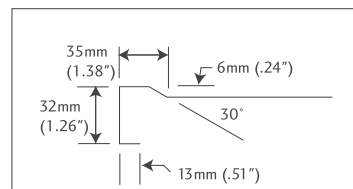

Marine






Marine - Deep

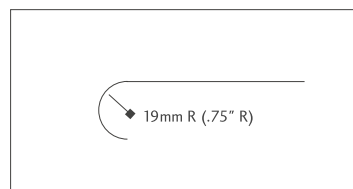


Rolled

Hole Drilling Configurations - Commercial Sinks




SINGLE LEDGEBACK






BUBBLER HOLE DETAIL



DOUBLE LEDGEBACK

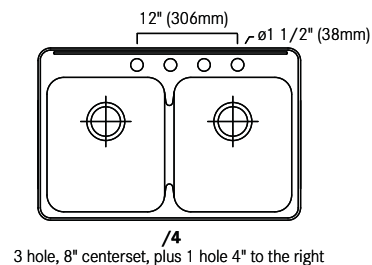


TRIPLE LEDGEBACK

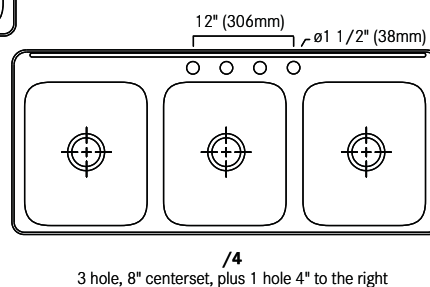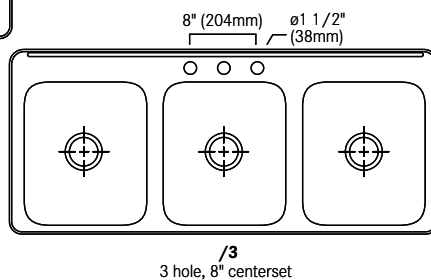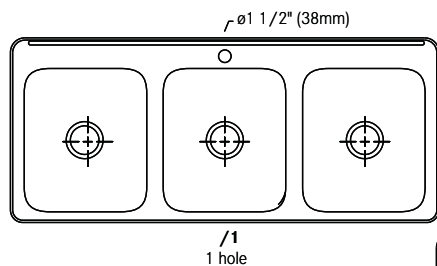


Hole Drilling Configurations - Classroom Sinks



LBSL SERIES - CLASSROOM SINKS

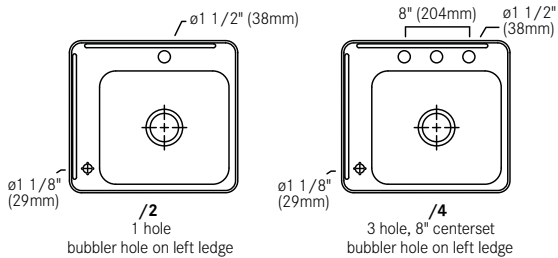


LBLR SERIES - CLASSROOM SINKS

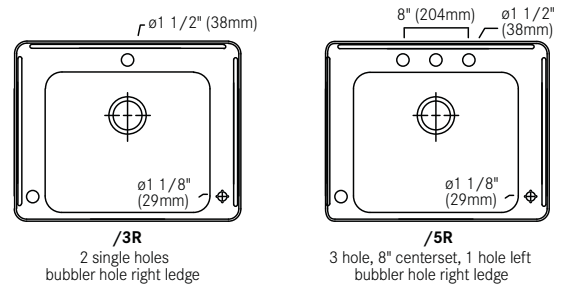


LBRs SERIES - CLASSROOM SINKS

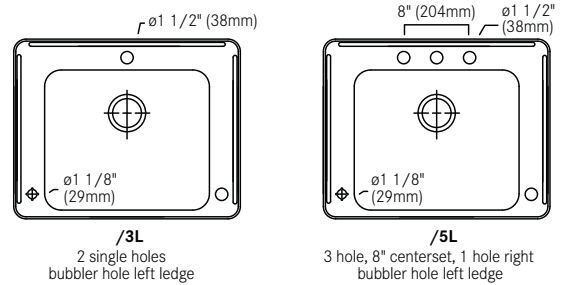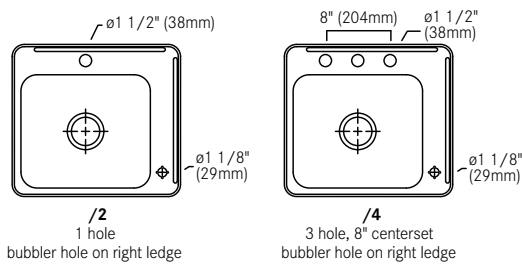


LHS SERIES - CLASSROOM SINKS

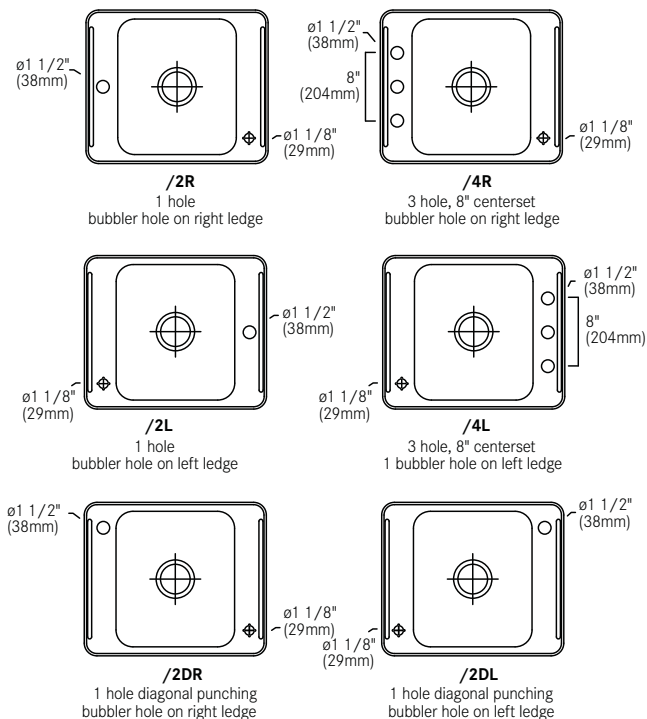

LRS SERIES - CLASSROOM SINKS

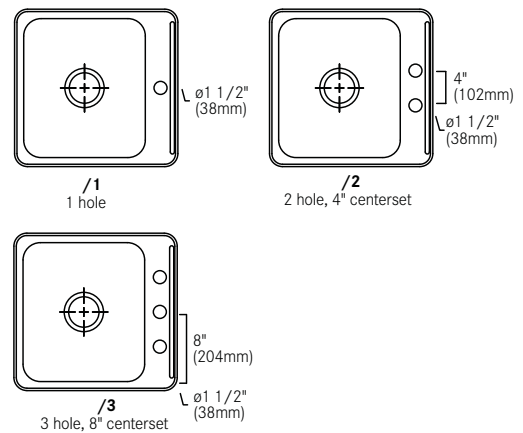

BUBBLER HOLE DETAIL






Saniguard® product protection

SANIGUARD® antimicrobial product protection is applied to our Clinical Hand Wash basins as well as to our Premium Surgical Scrub Stations to protect the product from the growth of bacteria, mold, mildew and fungi that can cause odours and staining, in hospitals, clinics, and other medical facilities.

SANIGUARD® product protection is an invisible, food-safe, odourless coating applied to all exposed surfaces on the Clinical Hand Wash basins and Premium Surgical Scrub Stations models. SANIGUARD® product protection is available as a custom coating for most Franke Commercial sinks; however, it is only recommended for use in hand washing applications. The use of sharp utensils or heavy equipment can chip and mar the treated surface rendering Saniguard ineffectual. To receive a quotation on the application of SANIGUARD® product protection to other Franke Commercial products, please contact our Customer Service Representatives by **e-mail** to **commercial-info.us@franke.com** or by **fax** 1-866-440-2250.

How does it work? When microbes come into contact with a surface treated with SANIGUARD® product protection, the inorganic, silver ion technology actively inhibits their growth by hindering cell wall transmissions, disrupting cell metabolism, and interfering with cellular reproduction.

What are the benefits of this coating on a stainless steel sink? SANIGUARD® product protection is effective against most common bacteria, yeasts, molds, and fungi that cause stains, odours and product deterioration. In addition, SANIGUARD® product protection makes products easier to clean and keep them cleaner and fresher between cleanings.

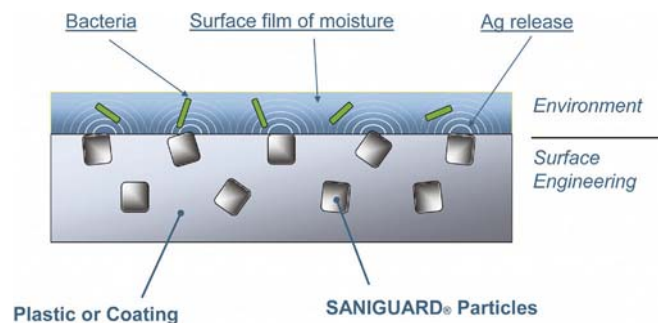

Under normal cleaning conditions, the SANIGUARD® coating will provide continuous antimicrobial product protection for the useful life of the product.

Please note: SANIGUARD® product protection is designed to protect the product itself and will not protect the user or others from food-borne illness or disease. Always follow proper hygienic and cleaning procedures when using this product.

HOW TO CLEAN SANIGUARD® PRODUCTS

Do not use any scouring pads, but instead simply wipe with a soft cloth and any of the following: bleach, quaternary ammonia, phenol or MEK. Do not use caustic sodium hydroxide. Do not place sharp items in sinks with Saniguard treatment or leave cleaning cloths in sink for prolonged periods of time.)



STAINLESS STEEL CARE AND MAINTENANCE

Practical experience suggests that using high-quality materials reduces the staining of products that help maintain the appearance in heavily used washrooms. Thanks to the durable and hygienic characteristics of stainless steel, it provides clean and safe products for public washrooms, hospital environments, commercial kitchens and more.

WHAT TO DO...

The best form of maintenance is frequent, regular cleanings. The best method of preventative maintenance is to ensure that the fixture is clean, dry and exposed to room atmosphere when not in use. Rinse and towel dry the fixtures daily in order to minimize major cleanups. This is of particular importance if potentially corrosive chemicals have been used.

Keep the fixture free of any standing water to prevent the build-up of mineral deposits. The quality of your water can affect the appearance and this water quality will vary from building to building. To clean your stainless product, use the mildest cleaning procedure that will do the job effectively.

On **shiny mirror finish** products we recommend using either a liquid detergent or Peek(TM) with a soft cloth. **DO NOT USE ANY ABRASIVE MATERIALS ON THE MIRROR FINISH.**

On **matte satin finishes** and/or inside sink bowls we recommend using a very mild abrasive cleanser such as Old Dutch® or Cameo®.

Any cleaning or scrubbing to remove stubborn stains should follow the direction of the grain line. Any scrubbing across the grain will show as a scratch. Scrubbing in the same direction as the polish lines will blend in any surface scratch. We recommend that Scotch-Brite® pads be used only on satin finishes.

Stains and water spots anywhere on the product can be removed with a small amount of Peek™ on a damp cloth. Rub Peek™ over the surface. Always rinse after using a cleaning agent, and wipe dry to discourage any water spotting.



WHAT NOT TO DO...

We don't recommend chlorine bleach because it will attack the protective layer that makes stainless steel truly stainless. The risk of damage is proportional to the concentration of the chlorine and the duration of exposure between the fixture and chlorine agent. Always dilute any antibacterial product used and wipe up any spills. **Note:** some antibacterial soaps contain a chlorine compound.

The unique properties of stainless steel are dependent upon exposure of the surface to the atmosphere. Do not leave any utensils in a sink overnight, as they will trap water underneath or leave a residue of small iron particles which could lead to staining and discoloration of the surface. They may not even be readily visible, but they most certainly will lead to corrosion. Any signs of rust can be removed with non-metallic Scotch-Brite® scouring pads, but do not scrub across the grain.

For similar reasons do not leave any mild steel, or cast iron cookware or implements, anywhere on a stainless steel surface for extended periods of time.

Any of the following products **should never be used** on stainless steel as they can damage or scratch the surface: steel wool, metallic scouring pads, sand paper, abrasive grinding and polishing powder.



THE TYPES OF STAINLESS STEEL AND FINISHES

HOW THE STEEL TYPE IS CHOSEN

Franke Kindred Canada uses type 302, type 304 and type 316 stainless steel in its sink production.

20 GAUGE

18-8 stainless steel, Type 302 - A good quality steel with 18% chromium and 8% nickel content. This type of stainless steel is typically used for sinks that are 8" deep or less.

18 GAUGE

18-10 stainless steel, Type 304 - A heavier weight stainless with 18% chromium, and 10% nickel. This type of stainless steel results in the ability to draw a deeper sink bowl

14 AND 16 GAUGE STAINLESS STEEL

Type 304 - Most often used in fabrication of institutional sinks such as kitchen sculleries, wallmount washup sinks, mop and service sinks. Franke's vandal-resistant securityware products are fabricated from heavy duty 14 gauge stainless steel for the utmost in durability.

TYPE 316 STAINLESS STEEL

is a corrosion resistant steel intended for applications such as labs where acids and other corrosive materials are present. This stainless contains minimums of 16-18% chromium and 10-14% nickel. Maximum corrosion resistance is obtained with the addition of molybdenum to form TYPE 316, designed to resist attack under highly corrosive conditions.

BOWL & DECK PRODUCT FINISHES

BOWL FINISHES

Bowl finishes on Franke Commercial Systems product range from brush to satin. A **brush finish**, typically found on vanity basin bowls is easy to clean and has a soft luster. A satin finish is somewhat more aggressive, with a definite grain line. This type of finish is practical, particularly in a heavy use application, as any scratches may be blended into the grain line.

DECK FINISHES

Franke Commercial Systems products have two distinct finishes by product type.

A **mirror finish** is standard on our vanity basins as well as on the seat portions of our toilets. This lustrous finish is very bright and shiny. It is the most common on faucets and soap dispensers used in public washrooms.

All of our other commercial products have a **satin finish** deck, which will stand up to the rigours of time and repeated use, and the natural grain of the steel will disguise any scratches acquired from use.



FRANKE
EZ
TORQUE





The new standard in sink installation

5 times faster, in 2 easy steps

EZ TORQUE™

An innovative fastening system to secure rim of sink to countertop.

- Clamps are factory installed on topmount sinks
- No parts to attach or lose
- No waiting for replacements
- Drop sink into countertop, then tighten clamps with drill

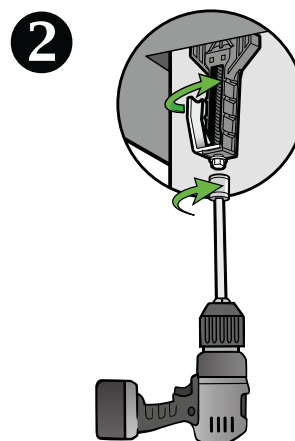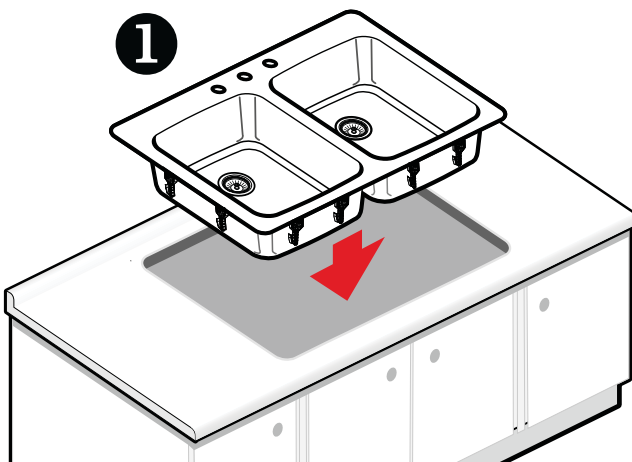

NOMENCLATURE GUIDE

TOPMOUNT SINKS

S	Single sink without faucet ledge	D	Double sink without faucet ledge
LBS	Ledge back single sink	LBD	Ledge back double sink
AS	Wheelchair accessible/ADA compliant single sink without faucet ledge	T	Triple sink without faucet ledge
ALBS	Wheelchair accessible/ADA compliant ledge back single sink	LBT	Ledge back triple sink

CLASSROOM SINKS

LBSL	Ledge back & left, single compartment	LHS	Opposing ledges, left & right only, single compartment
ALBSL	Wheelchair accessible/ADA compliant ledge back & left, single compartment	ALHS	Wheelchair accessible/ADA compliant, opposing ledges, left & right only, single compartment
LBRS	Ledge back & right, single compartment	LRS	Ledge right side only, single compartment
ALBRS	Wheelchair accessible/ADA compliant ledge back & right, single compartment	ALRS	Wheelchair accessible/ADA compliant, ledge right side only, single compartment
LBLRS	Ledge back, left & right, single compartment	ART	Large artroom single sink without faucet ledge
ALBLRS	Wheelchair accessible/ADA compliant, ledge back, left & right, single compartment	SANW	WASHINO Miranit hand wash basin

DRAINBOARD SINKS

LBSDBR	Ledge back single with drainboard on right side	LBDDBR	Ledge back double with drainboard on right side
LBSDBL	Ledge back single with drainboard on left side	LBDDBL	Ledge back double with drainboard on left side

SCULLERY SINKS

SL	Classic Series, single compartment	RSL	R-Series, single compartment
DL	Classic Series, double compartment	RDL	R-Series, double compartment
TL	Classic Series, triple compartment	RTL	R-Series, triple compartment
SSL	S-Series, single compartment	WSL	W-Series, single compartment
SDL	S-Series, double compartment	WDL	W-Series, double compartment
STL	S-Series, triple compartment	WTL	W-Series, triple compartment

WASHROOM ACCESSORIES

CH	Curtain hook	EXOS	Complete range of washroom accessories
CM-	Back rest with anchoring covers	RODX	Rodan series with satin finish
CR-	Curtain rod	SD	Soap dispenser
CV-	Curtain - vinyl	STRX	Stratos series garment hook with satin finish

OTHER

CMPX	Urinal	UCS	Undermount single sink
FSS	Floor service/mop sink	UCD	Undermount double sink
FWHB	Pedestal hand wash basin	V	Vanity
OC6/RC6	T316 cup sink	WHB	Wall hung hand wash basin
OV	Vanity with overflow	WSS	Wall hung service sink
RS/SS	Sacrarium sink	WTS	Wall trough sink
SSS	Sewage sampling sink	WT	Wall hung basin
SSU	Surgeon scrub-up unit		



Model	Sink / Bowl Configuration		Bowl Dimensions			Gauge	Waste Option	
	With Ledge	Single? Double? Triple?	Front to back	Left to right	Depth			
ZLBS2708P-1	LB (Ledge Back)	S (Single bowl)	2 (12")	7 (17")	08 (8")	P (premium 18)	-1	(3 1/2" [89mm] crumb cup with 1 1/2" tailpiece)
LBT8610P-1	LB (Ledge Back)	T (Triple bowl)	8 (18")	6 (16")	10 (10")	P (premium 18)	-1	(3 1/2" [89mm] crumb cup)
LBS9407-3	LB (Ledge Back)	S (Single bowl)	9 (9 1/2")	4 (14 1/2")	07 (7")	* (20)	-3	(1 1/2" [38mm] duplex waste assembly)
LBLS4608P-1	LBL (Ledge Back & left)	S (Single bowl)	4 (14")	6 (16")	08 (8")	P (premium 18)	-1	(3 1/2" [89mm] crumb cup)

* 20 gauge unless otherwise indicated by the letter "P" for single, classroom, double, triple & undermount sinks

Healthcare



cUPC®

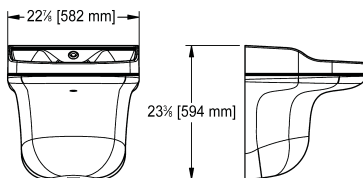

Medi-flo: hand hygiene sink

Bacteria-killing ozone technology

White solid surface hand hygiene sink with removable shroud. Left rear 1 1/2" (DN 40) waste location to prevent water from splashing directly into the waste. An anti-splash feature runs through the center of the sink to greatly reduce splashing. IR controls trigger an illuminated crystal clear true laminar flow water stream delivering water with dissolved ozone and other mixed oxidants on demand. Flow rate is 1.32gal/min. Ozonated water has been proven as a safe and extremely effective way to help sanitize the sink and the waste and improve the efficiency of hand washing (even if a user does not use soap). Other control features include; a post wash cycle of 3 seconds which ensures all soap residue has been washed down the sink, and a user defined ozonation cycle to help keep the drain and trap free of CPOs and other pathogens.

Hand hygiene sinks are specifically designed for hand washing only. They are not recommended as a drinking source, for washing utensils or for draining of medical bags or bedpans. We recommend a minimum TDS (water conductivity) of 200; therefore, do not use with water which is de-ionized or has been treated using reverse osmosis. cUPC certified and is compliant with CSA B45.5-11/IAPMO Z124-2011 and IGC156-2012el. Meets and exceeds various national healthcare standards; ie, CSAZ8000. Wheelchair accessible: meets ADA, ANSI A117.1 .

An optional thermostatic mixing valve (MIX-LF) and in-wall carrier (IWC2104) is available. Recommended temperature is 27-35C. Patent Pending.

HWSS2321W-00

OPTIONAL ACCESSORIES

In-wall carrier

IWC2104

Thermostatic mixing valve

MIX-LF






SHROUD

Removable, replacement shroud for HWSS2321W-00. White polymer composite material.

20 15/16 x 22 15/16 x 19" Overall (FB x LR x H).
532 x 582 x 482 mm Overall (FB x LR x H).

MEDI-SHR

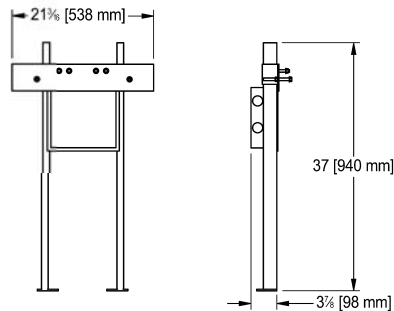

IN-WALL CARRIER

Floor mounted in-wall carrier designed for Medi-flo (HWSS2321W) Hand Hygiene Sink. Preset stud locations simplify installation. Steel uprights with welded feet. Integrated rough in box. Mounting hardware included.

IWC2104



MIXING VALVE

Included in the SSU series.
Optional accessory for HWSS2321W-00 (Medi-flo) and HWF41 (Ozo-flo).

MIX-LF



NEW

HAND HELD PROGRAMMER

For HWSS2321W-00 (Medi-flo) and HWF41 (Ozo-flo). This programmer allows for wireless adjustment of parameters such as sensor range, ozone generator run times, trap disinfection cycles and data logging.

AC01-005

Healthcare



NEW

Ozo-flo faucet:

The retrofit solution to Medi-flo's bacteria-killing ozone technology





UPC®

Ozo-flo clinical hand wash faucet. Ideal for retrofit applications where existing hand wash sinks can benefit from the addition of ozone and other mixed oxidants to improve hand hygiene and keep the sink and waste free of biofilms and bacteria. Deck mounted Type316 stainless steel spout with blue illumination ring. Laminar flow rate is 1.32gal/min. Parameters adjustable with optional handheld programmer AC01-005. Wall mounted housing conceals ozone generator, electronic controls and battery backup so the faucet will still operate (less ozone) in the event of a power failure. Plug in transformer supplied (required for generation of mixed oxidants).

HWF41

OPTIONAL ACCESSORY
Thermostatic mixing valve



MIX-LF

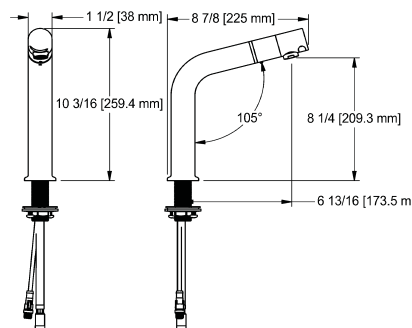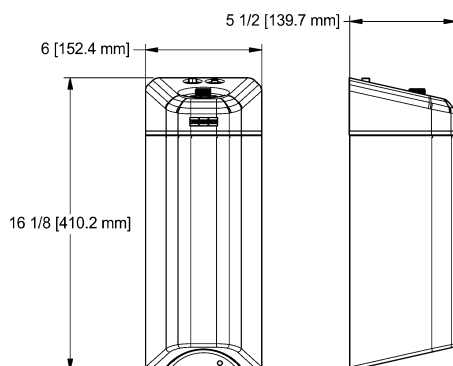



Mental Health/Bariatric Care

Ligature resistant range

cUPC®

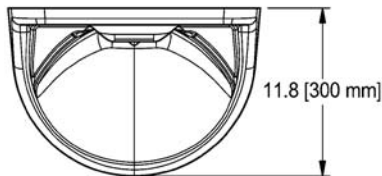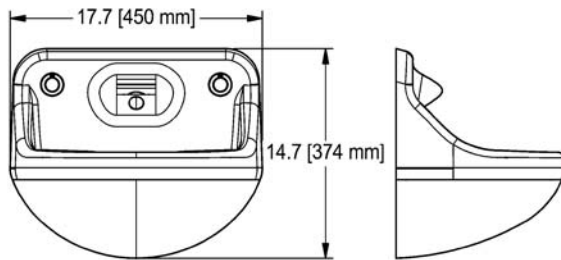

cUPC®

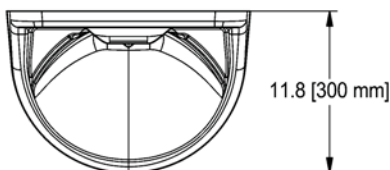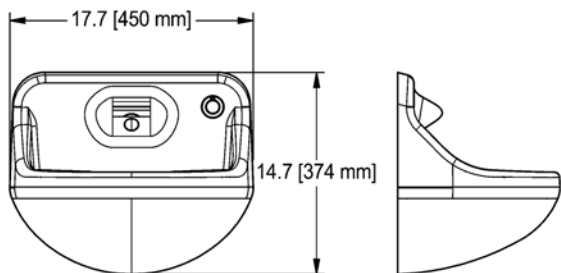

NEW

DUAL TEMPERATURE BASIN

Dual temperature (cold or mixed) safe en-suite basin has been designed for the toughest environments, and manufactured using advanced technologies. This basin is robust, vandal resistant and avoids ligature points where possible. Basins have been tested to withstand forces to 1000 lbs. or 450 kg. Material properties include high resistance to cyclical stresses and excellent impact resistance and will not be subject to catastrophic failure. The surface is a high-grade polyester gel coat. This provides an ideal solution for use in high security, mental health and bariatric applications. These basins are rear mounted and require rear access such as a pipe chase to install controls, supplies and waste connections.

Features:

- Polyester gel coat finish
- GRP impact resistant construction
- Rear concealed waste outlet
- Stainless steel ligature-resistant waste grid
- Single integrated water spout
- Programmable water controls (available separately).

VR01-090

NEW

SINGLE TEMPERATURE BASIN

Single temperature (mixed) safe en-suite basin has been designed for the toughest environments, and manufactured using advanced technologies. This basin is robust, vandal resistant and avoids ligature points where possible. Basins have been tested to withstand forces to 1000 lbs. or 450 kg. Material properties include high resistance to cyclical stresses and excellent impact resistance and will not be subject to catastrophic failure. The surface is a high-grade polyester gel coat. This provides an ideal solution for use in high security, mental health and bariatric applications. These basins are rear mounted and require rear access such as a pipe chase to install controls, supplies and waste connections.

Features:


- Polyester gel coat finish
- GRP impact resistant construction
- Rear concealed waste outlet
- Stainless steel ligature-resistant waste grid
- Single integrated water spout
- Programmable water controls (available separately).

VR01-091

Healthcare

Mental Health/Bariatric Care

Ligature resistant range

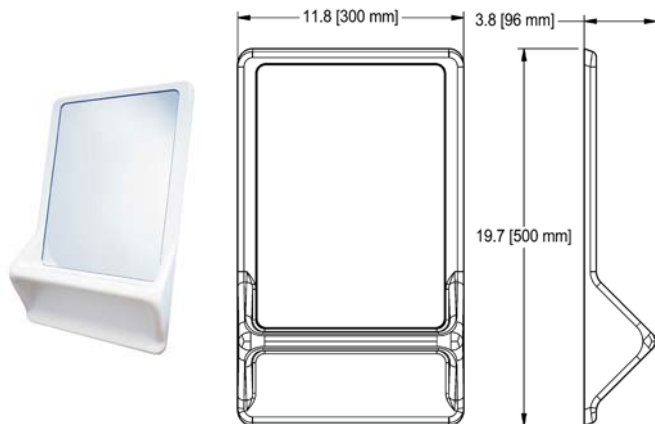

NEW

MIRROR WITH SHELF

Bariatric and mental health accessory for the most demanding of environments, using the latest impact resistant materials and ligature resistant design. This mirror with integrated shelf uses a virtually indestructible plastic mirror insert, with impact resistant one-piece molded frame, making these highly suited for custodial, healthcare and mental health applications.

Features:

- Impact resistant GRP molded frame
- Poly-carbonate mirror insert overall width x height: 9 7/8 x 13 3/4" (250 x 350 mm)
- Mounts with shelf on bottom or on top
- Hygienic, easy to clean white gel coat finish.
- Color: white.

3 3/4 x 11 7/8 x 19 5/8" Overall (FB x LR x H).
96 x 300 x 500 mm Overall (FB x LR x H).

VR01-037



NEW

TOILET PAPER HOLDER

Consists of two parts - a wall bracket and a loop for hanging the toilet paper. When the bracket is mounted on the wall the loop is snapped to the bracket and the toilet paper holder is ready for use. The toilet paper holder must be mounted with two safety screws with a flat bottomed head. Its aesthetics and technology are designed to be none provoking. The loop is designed to be safe and is produced of a strong, durable and flexible plastic. This toilet paper holder is durable and can withstand over 1000 overloads, releases its entire vertical load at a maximum of 44 lbs. or 20 kg and is tested by SP, Technical Research Institute of Sweden. Color: white.

7/8 x 6 1/2 x 6 1/8" Overall (FB x LR x H).
21 x 165 x 155 mm Overall (FB x LR x H).

VR01-055



NEW

APPAREL HOOK

This ligature resistant hook has been designed not to have any loose parts that can be thrown away, used for self-harm or be used as weapons. The hooks aesthetics and technology is designed to be none provoking. The hook has no sharp corners and is tested by SP, Technical Research Institute of Sweden. This hook is hygienic and resistant to chemicals and has an extremely long life. This hook is durable and can withstand over 1000 overloads. The hook releases its entire vertical load at a maximum of 44 lbs. or 20 kg. Minimum order quantity for this product is 10 pieces. Color: white.

1 1/2 x 7/8 x 2 3/8" Overall (FB x LR x H).
39 x 20 x 60 mm Overall (FB x LR x H).

VR01-054



NEW

GRAB BAR

White ligature resistant grab bar with center plate.
1 1/4" (32 mm) diameter.
Color: white.

23 5/8" (600 mm), complete with fillet plate on 26 9/16" (675 mm) x 3 1/8" (80 mm) back plate face fixed with x 6 screws.

VR01-069

17 3/4" (450 mm), complete with fillet plate on 20 5/8" (525 mm) x 3 1/8" (80 mm) back plate face fixed with x 6 screws.


VR01-068

DESIGN FEATURES:

- Surgical scrub stations designed with sloped edges to minimize free-standing water.
- Special integral waste design to prevent use of a waste plug, with 1 1/2" threaded tailpiece for use with offset waste.
- SANIGUARD® product protection is effective against most common bacteria, yeasts, molds and fungi that cause stains, odors and product deterioration. It is designed to protect the

product itself and will not protect the user or others from food-borne illness or disease. Always follow proper hygienic and cleaning procedures when using this product.

- Intended for hand washing only. The use of sharp utensils or heavy equipment in the sink can chip and mar the treated surface, rendering Saniguard ineffectual; thereby voiding the warranty.

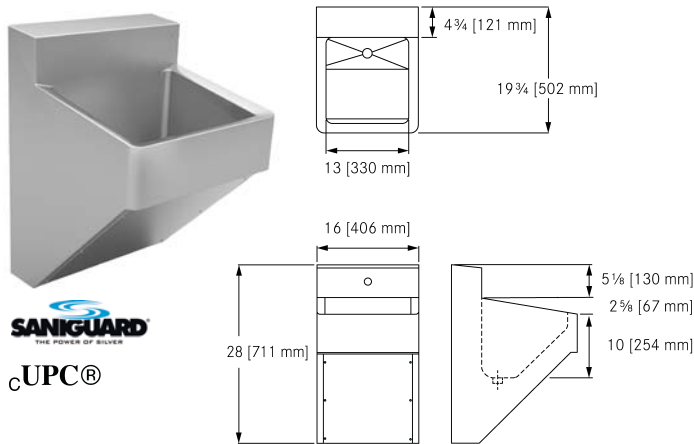
**PREMIUM SCRUB SINK, 16 GAUGE, 16" WIDE**

Single compartment premium surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) Stainless steel. Polished #4 satin finish. Radius coved bowl corners. Access panel for service and maintenance. Integral 1 1/2" (38 mm) threaded tailpiece. Supplied with wall hanger brackets. Surface treated with SANIGUARD® product protection. Standard hole drilling is 1 1/8" (28 mm) diameter 2 1/2" (64 mm) below backsplash crease. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery.

16" (406 mm) overall width with 13" (330 mm) wide sink compartment

SSU1-2016-00

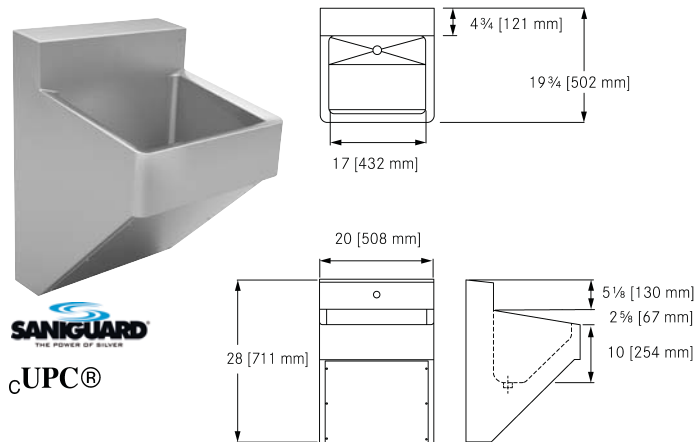
**PREMIUM SCRUB SINK, 16 GAUGE, 20" WIDE**

Single compartment premium surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) Stainless steel. Polished #4 satin finish. Radius coved bowl corners. Access panel for service and maintenance. Integral 1 1/2" (38 mm) threaded tailpiece. Supplied with wall hanger brackets. Surface treated with SANIGUARD® product protection. Standard hole drilling is 1 1/8" (28 mm) diameter 2 1/2" (64 mm) below backsplash crease. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery.

20" (508 mm) overall width with 17" (431 mm) wide sink compartment

SSU1-2020-00

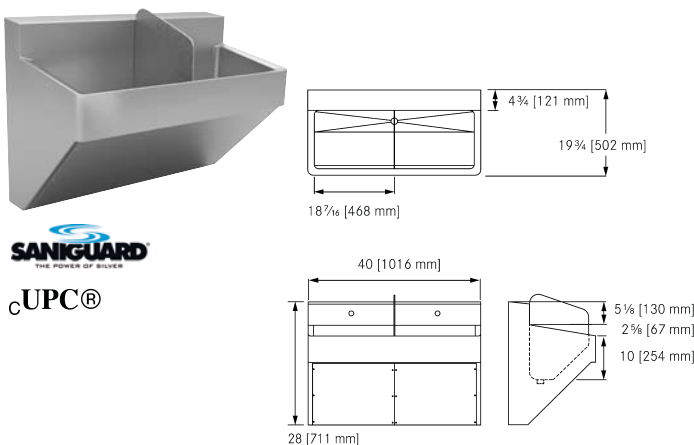**PREMIUM SCRUB SINK, 16 GAUGE, 40" WIDE**

Double compartment premium surgical scrub station. 16 gauge (1.5 mm), type 304 (CNS 18/10) Stainless steel. Polished #4 satin finish. Radius coved bowl corners. Access panel for service and maintenance. Integral 1 1/2" (38 mm) threaded tailpiece. Supplied with wall hanger brackets. Surface treated with SANIGUARD® product protection. Standard hole drilling is 1 1/8" (28 mm) diameter 2 1/2" (64 mm) below backsplash crease. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery.



40" (1016 mm) overall width with 37 1/2" (953 mm) wide sink compartment

SSU2-2040-00



Healthcare



cUPC®

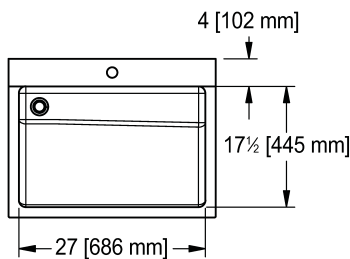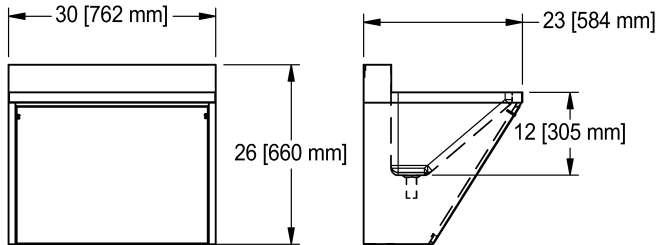

cUPC®

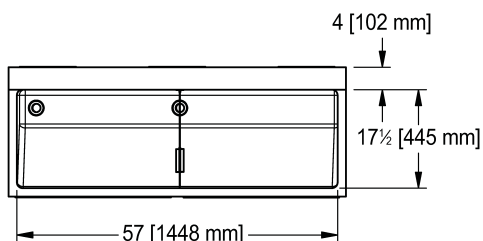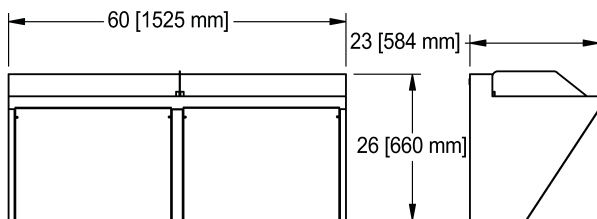

SCRUB SINK, 18 GAUGE, SINGLE

Single compartment surgical scrub station. 18 gauge (1.2 mm), type 304 (CNS 18/10) Stainless steel. Polished #4 satin finish. Radius coved bowl corners. Franke hygienic waste with integral tailpiece. (No separate waste fitting required) Access panel for service and maintenance. Supplied with wall hanger brackets. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Faucet not included. Please specify hole drilling requirement when ordering.

SSU1-00

Model Options:
AC powered hands-free faucet
MIX-LF, thermostatic mixing valve

SSU1-10

AC powered hands-free faucet
MIX-LF, thermostatic mixing valve
AC powered hands-free soap dispenser

SSU1-11

Battery operated hands-free faucet
MIX-LF, thermostatic mixing valve

SSU1-20

OPTIONAL ACCESSORY
Stainless Backsplash

SSU1-BS

SCRUB SINK, 18 GAUGE, DOUBLE

Double compartment surgical scrub station. 18 gauge (1.2 mm), type 304 (CNS 18/10) Stainless steel. Polished #4 satin finish. Radius coved bowl corners. Franke hygienic waste with integral tailpiece. (No separate waste fitting required) Access panel for service and maintenance. Removable divider. Please specify hole drilling requirement when ordering. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Faucets not included. Please specify hole drilling requirement when ordering.

SSU2-00

Model Options:
AC powered hands-free faucets (2 pieces)
MIX-LF, thermostatic mixing valves (2 pieces)

SSU2-10

AC powered hands-free faucets (2 pieces)
MIX-LF, thermostatic mixing valves (2 pieces)
AC powered hands-free soap dispensers (2 pieces)

SSU2-11

Battery operated hands-free faucets (2 pieces)
MIX-LF, thermostatic mixing valves (2 pieces)



SSU2-20

OPTIONAL ACCESSORY
Stainless Backsplash

SSU2-BS



UPC®

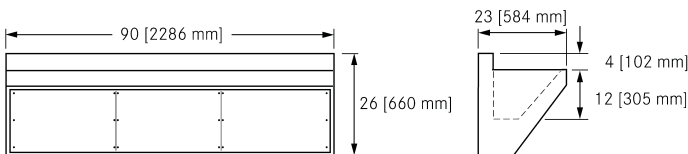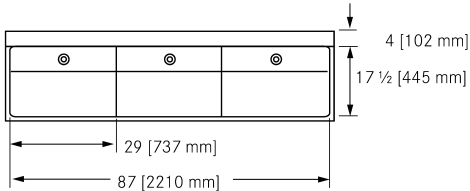

SCRUB SINK, 18 GAUGE, TRIPLE

Triple compartment surgical scrub station. 18 gauge (1.2 mm), type 304 (CNS 18/10) Stainless steel. Polished #4 satin finish. Radius coved bowl corners. Access panel for service and maintenance. Removable dividers. 1 1/2" (38 mm) grid strainer. Please specify hole drilling requirement when ordering. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery. Faucets not included. Please specify hole drilling requirement when ordering.

SSU3-00

Model Options:

AC powered hands-free faucets (3 pieces)
MIX-LF, thermostatic mixing valve (3 pieces)

SSU3-10

AC powered hands-free faucets (3 pieces)
MIX-LF, thermostatic mixing valve (3 pieces)
AC powered hands-free soap dispenser (3 pieces)

SSU3-11

Battery operated hands-free faucets (3 pieces)
MIX-LF, thermostatic mixing valve (3 pieces)

SSU3-20

OPTIONAL ACCESSORY

Stainless Backsplash


SSU-BS

BACKSPLASH FOR SSU-SERIES

SSU backsplash accessory for SSU1, SSU2 and SSU3 surgeon scrub sinks. 18 gauge (1.2 mm), type 304 (CNS 18/10) Stainless steel. Polished to a #4 satin finish. The SSU-BS provides a means to conceal the mixing valve and faucet controls inbehind the front access panel. The SSU-BS also protects the back wall from splashing and provides a means to mount a hands-free Franke splash mounted faucet, soap and paper towel dispenser.

For SSU2 and SSU3, order and install 2 or 3 pieces respectively.

SSU-BS

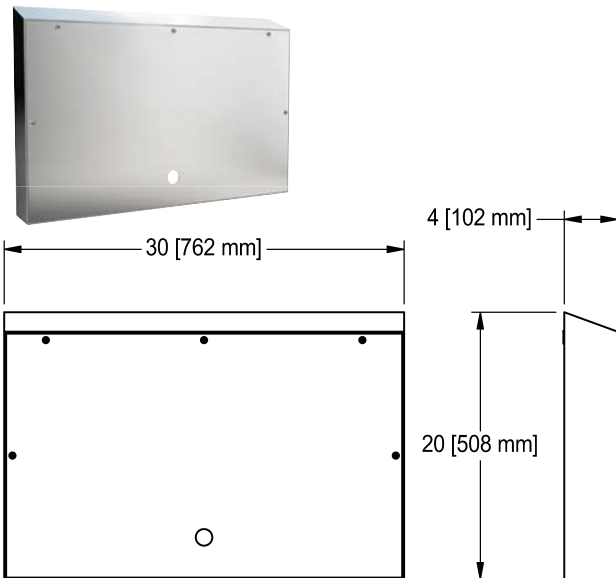

Healthcare



CLINICAL WASH TROUGH, 18 GAUGE


Clinical hand wash basin. Left waste location with open access to allow for easy cleaning of P-Trap. Integral 1 1/2" (38 mm) waste welded to bottom of the sink bowl. 18 gauge (1.2 mm), type 304 (CNS 18/10) Stainless steel. Polished #4 satin finish. Radius coved bowl corners.

Certified to ASME A112.19.3-2008 / CSA B45.4-08. Wheelchair accessible: meets ADA, ANSI A117.1 .

This fixture is coated with SANIGUARD® product protection. SANIGUARD® product protection is applied to all exposed surfaces of the sink. This treatment utilizes a silver ion technology to inhibit the growth of bacteria, molds and mildews. Silver ions are only released in the presence of bacteria-laden moisture and disrupt the metabolic and reproductive cycles of the micro-organisms. Intended for hand washing only. The use of sharp utensils or heavy equipment in the sink can chip and mar the treated surface, rendering Saniguard ineffectual; thereby voiding the warranty. Patent Pending / Industrial. Design Registration Pending.

Separate sink carrier is not required.

AWHB1414P-00

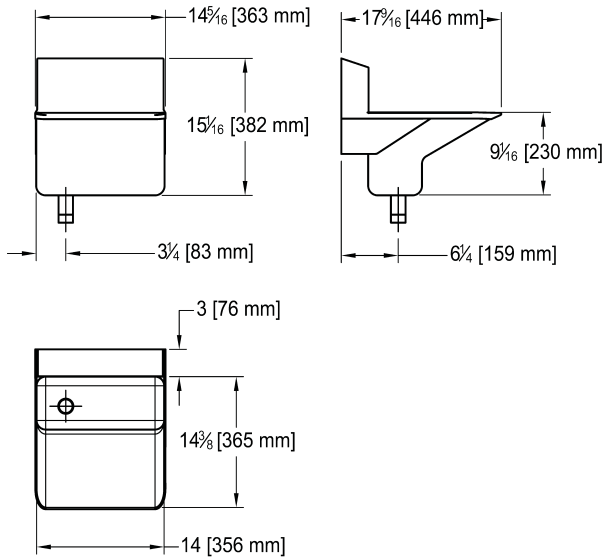


SHROUD FOR HWS1414P-00

Stainless steel removable shroud for HWS1414P-00 basin.




13 1/2 x 14 1/2 x 10" Overall (FB x LR x H).

343 x 368 x 254 mm Overall (FB x LR x H).

HWS-RS-00

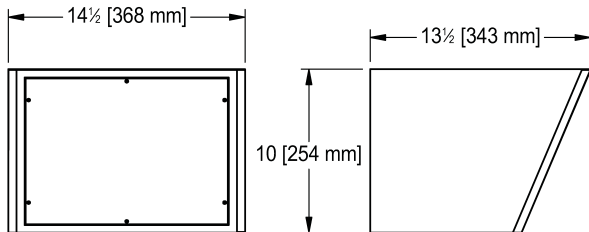

✧ Due to the strength and lightness of stainless steel, an in wall carrier is not required and the sink can be carried and installed by one person. A wall hanger bracket is used to mount the sink to the wall. This fixture is coated with SANIGUARD® product protection which is applied to all exposed surfaces of the sink. This treatment utilizes a silver ion technology to inhibit the growth of bacteria, molds and mildews. Silver ions are only released in the presence of bacteria-laden moisture and disrupt the metabolic and reproductive cycles of the micro-organisms. Intended for hand washing only. The use of sharp utensils or heavy equipment in the sink can chip and mar the treated surface, rendering Saniguard ineffectual; thereby voiding the warranty. Patent Pending / Industrial. Design Registration Pending.



CLINICAL WASH TROUGH, FOR HANDS-FREE FRANKE HANDS-FREE FRANKE SPLASH MOUNT FAUCET ✧




Antimicrobial hand hygiene sink meets national healthcare standards. Constructed with an integral shroud. 18 gauge (1.2 mm) type 304 stainless steel. Right rear waste location to prevent water from splashing directly into the waste from both the faucet and during hand washing. Integral 1 1/2" (DN 40) tailpiece is welded to the bottom of the basin. Waste is left open and shaped to prevent the insertion of plugs, strainers and anti-splash fittings to comply with national healthcare guidelines. High back and side walls contain splashing and protect adjacent surfaces from contamination.

Recommended for laminar flow, hands-free Franke splash mounted faucet.

Model Option:

HWSS1518P-00/1 - 1 faucet hole Ø1 1/8" (29 mm) 9" (228 mm) from top of basin, with anti rotation pin hole Ø0.25" (6.3 mm) below.

HWSS1518P-00



CLINICAL WASH TROUGH, FOR DECK MOUNT FAUCET ✧

Antimicrobial hand hygiene sink meets national healthcare standards. 18 gauge (1.2 mm) type 304 stainless steel. Left rear waste location to prevent water from splashing directly into the waste from both the faucet and during hand washing. Integral 1 1/2" (DN 40) tailpiece is welded to the bottom of the basin. Waste is left open and shaped to prevent the insertion of plugs, strainers and anti-splash fittings to comply with national healthcare guidelines. High back and side walls contain splashing and protect adjacent surfaces from contamination.

Recommended for laminar flow, hands-free Franke deck mounted faucet.

Model Options:

HWS1414P-00/1, 1 hole, 1 1/2" diameter on ledge.

HWS1414P-00/3, 3 hole, 1 1/2" diameter, 4" center spread on ledge.

HWS1414P00, Custom, non-returnable.

HWS1414P-00

OPTIONAL ACCESSORY

Shroud

HWS-RS-00

Healthcare

✧ Due to the strength and lightness of stainless steel, an in wall carrier is not required and the sink can be carried and installed by one person. A wall hanger bracket is used to mount the sink to the wall. This fixture is coated with SANIGUARD® product protection which is applied to all exposed surfaces of the sink. This treatment utilizes a silver ion technology to inhibit the growth of bacteria, molds and mildews. Silver ions are only released in the presence of bacteria-laden moisture and disrupt the metabolic and reproductive cycles of the micro-organisms. Intended for hand washing only. The use of sharp utensils or heavy equipment in the sink can chip and mar the treated surface, rendering Saniguard ineffectual; thereby voiding the warranty. Patent Pending / Industrial. Design Registration Pending.



CLINICAL WASH TROUGH, 18 GAUGE, LARGE BACKSPASH ✧

Antimicrobial hand hygiene sink meets national healthcare standards. 18 gauge (1.2 mm) type 304 stainless steel. Left rear waste location to prevent water from splashing directly into the waste from both the faucet and during hand washing. Integral 1 1/2" (DN 40) tailpiece is welded to the bottom of the basin. Waste is left open and shaped to prevent the assembly of plugs, strainers and anti-splash fittings to comply with healthcare guidelines. High back and side walls contain splashing and protect adjacent surfaces from contamination. This hand hygiene sink is wider to permit forearm washing for light procedures as well as for mounting of paper towel and soap dispensers within the splash guard. Due to the large size of the back splash, an additional rear wall splash guard is not required to meet healthcare standards.

Recommended for hands-free Franke deck mounted faucet.


Model Options:



HWS1420P-00/1, 1 hole, 1 1/2" diameter on ledge.

HWS1420P-00/3, 3 hole, 1 1/2" diameter, 4" center spread on ledge.

HWS1420P-00, Custom, non-returnable.

HWS1420P-00

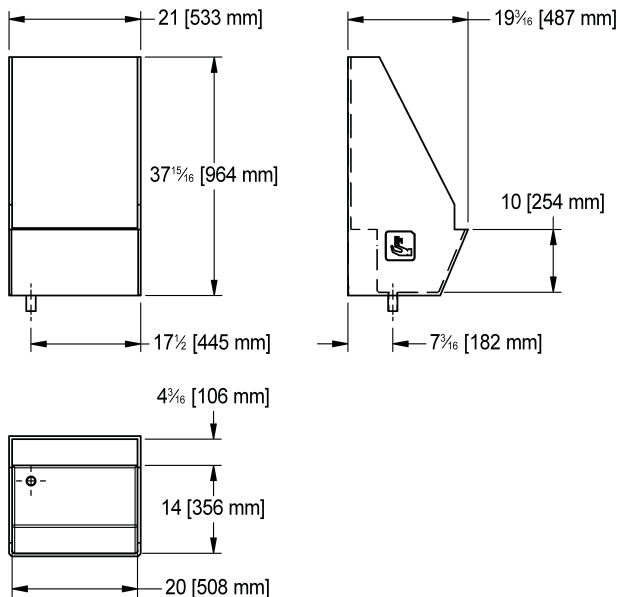

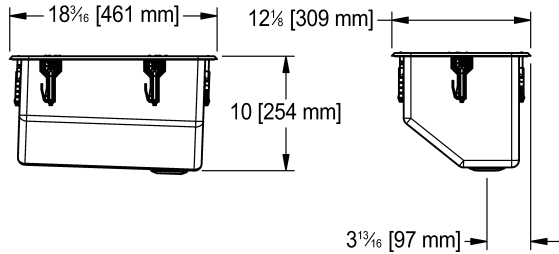



©UPC®

TOPMOUNT OR UNDERMOUNT, 18 GAUGE, 18" WIDE

Single compartment self rimming topmount (or undermount) medical hand wash sink. 18 gauge (1.2 mm), type 304 stainless steel. Sink compartment is angled to reduce splashing and waste is offset to reduce the risk of any bacteria contamination and splashing. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, sound deadening pads, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Right rear waste location. Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper and 1 1/2" (DN38) brass tailpiece.

HWS0610P-3

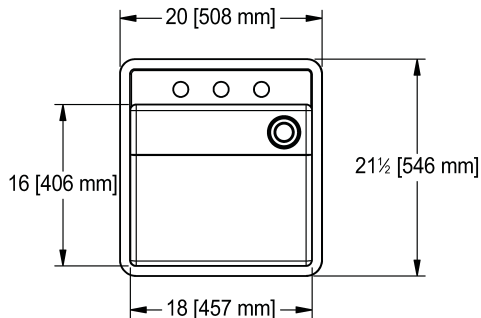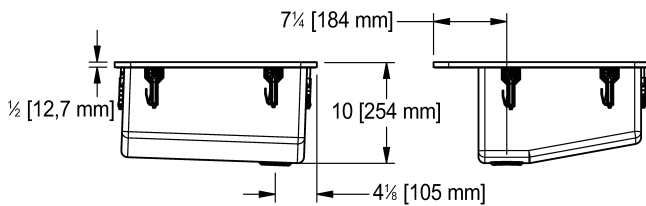

©UPC®

TOPMOUNT OR UNDERMOUNT, 18 GAUGE, 20" WIDE

Single compartment self rimming topmount (or undermount) medical hand wash sink. 18 gauge (1.2 mm), type 304 stainless steel. Sink compartment is angled to reduce splashing and waste is offset to reduce the risk of any bacteria contamination and splashing. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, sound deadening pads, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Right rear waste location. Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper and 1 1/2" (DN38) brass tailpiece. With faucet ledge.



Model Options:
HWS6810P-3/3, 3 faucet holes 1 1/2" diameter, 8" spread,
HWS6810P-3, Custom (non-returnable).

HWS6810P-3

Classroom Sinks



UPC®

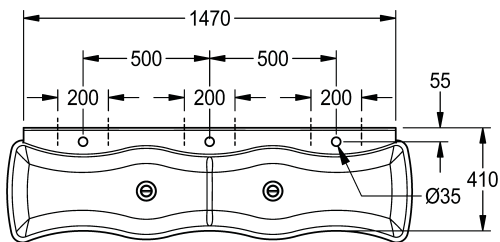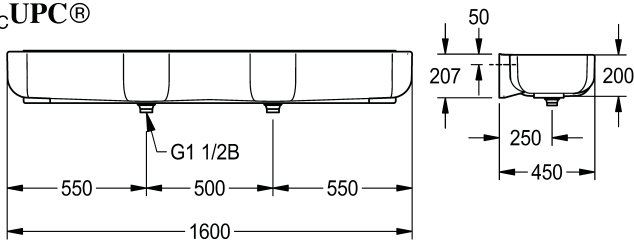

WASHINO TROUGH SINK - 3 WASH PLACES

WASHINO trough made of MIRANIT resin-bonded mineral material, with a smooth, pore-free surface (temperature-resistant up to 80°C). Alpine white color. Wave-shaped basins with reduced extension to increase accessibility to the faucet, large outer radii of basins helps minimize risk of injury, large inner radii facilitate easy cleaning. Faucet deck with 3 faucet holes, 1 3/8" (35 mm). 1 1/2" waste with 4 3/4" overflow valve are implemented as a standpipe. Integral back panel for mounting. Required waste fitting, model #100 (sold separately).

3 wash places
17 3/4 x 63 x 9 7/16" Overall F-B x L-R x D
7 7/8" bowl depth

SANW215


OPTIONAL ACCESSORY

100 WASTE FITTING






cUPC®

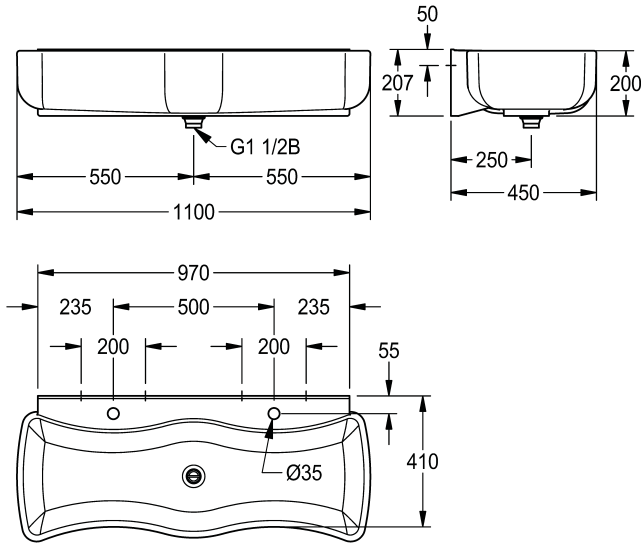

cUPC®

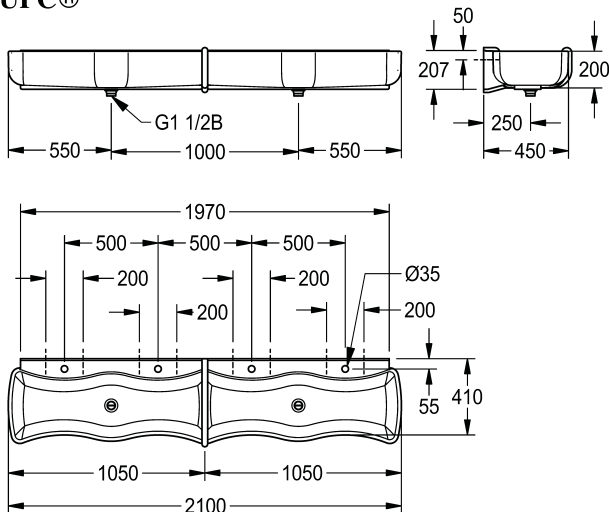

WASHINO TROUGH SINK - 2 WASH PLACES

WASHINO trough sink is made of MIRANIT resin-bonded mineral material, with a smooth, pore-free surface (temperature-resistant up to 80°C). Alpine white color. Wave-shaped basins with reduced extension to increase accessibility to the faucet, large outer radii of basins to minimize risk of injury, large inner radii facilitate easy cleaning. Faucet deck with a faucet hole 1 3/8" (35 mm) for each wash place. No custom hole drilling for this range.

1 1/2" waste with 4 3/4" overflow valve are implemented as a standpipe. Integral back panel for mounting.

Required waste fitting, model #100 (sold separately).

2 wash places

17 3/4" x 43 3/8" x 9 7/16" Overall F-B x L-R x D
7 7/8" bowl depth

SANW200

OPTIONAL ACCESSORY

100 WASTE FITTING

WASHINO TROUGH SINK - 4 WASH PLACES

WASHINO trough made of MIRANIT resin-bonded mineral material, with a smooth, pore-free surface (temperature-resistant up to 80°C). Alpine white color. Wave-shaped basins with reduced extension offers increased accessibility to the faucet, large outer radii of basins helps minimize risk of injury, large inner radii facilitates easy cleaning. Faucet deck with 2 faucet holes, 1 3/8" (35 mm) for each wash place. 1 1/2" waste with 4 3/4" overflow valve are implemented as a standpipe. Integral back panel for mounting.

Required waste fitting, model #100 (sold separately).

4 wash places

18 1/2" x 82 5/8" x 9 7/16" Overall F-B x L-R x D
7 7/8" bowl depth

SANW205



OPTIONAL ACCESSORY

100 WASTE FITTING



Classroom Sinks



cUPC®

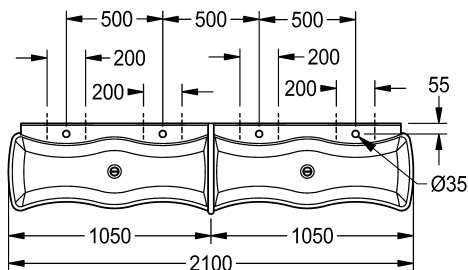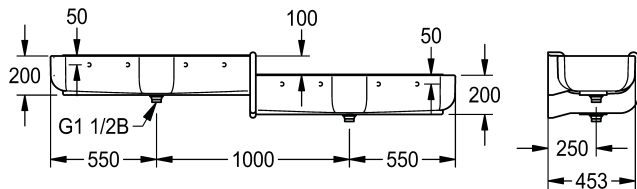

cUPC®

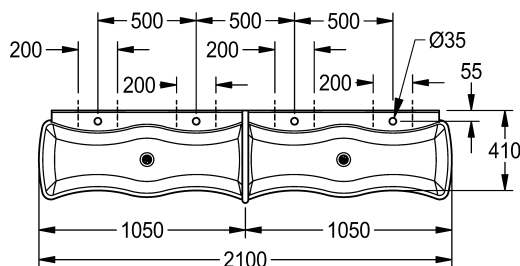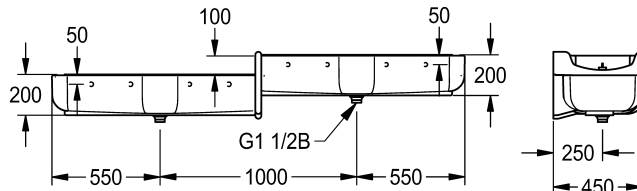

WASHINO TROUGH SINK, LEFT BASIN HIGH

WASHINO trough made of MIRANIT resin-bonded mineral material, with a smooth, pore-free surface (temperature-resistant up to 80°C). Alpine white color. With 4 wash places (2 wash places with a height difference of 100 mm), Wave-shaped basins with reduced extension offers increased accessibility to the faucet, large outer radii of basins helps minimize risk of injury, large inner radii facilitates easy cleaning. Faucet deck with 4 faucet holes, 1 3/8" (35 mm). Integrated divider with overflow function made of MIRANIT, blue color (RAL 5002). 1 1/2" waste with 4 3/4" overflow valve are implemented as a standpipe for 2 of the 4 washing stations. Integral back panel for mounting. Mounting instructions included. Required waste fitting, model #100 (sold separately).

Version with basin left above/right below

18 1/2 x 82 5/8 x 13 3/8" Overall F-B x L-R x D

Bowl depth 7 7/8"

SANW211

OPTIONAL ACCESSORY

100 WASTE FITTING

WASHINO TROUGH SINK, RIGHT BASIN HIGH

WASHINO trough made of MIRANIT resin-bonded mineral material, with a smooth, pore-free surface (temperature-resistant up to 80°C). Alpine white color. With 4 wash places (2 wash places with a height difference of 100 mm). Wave-shaped basins with reduced extension offers increased accessibility to the faucet. Large outer radii of basins helps minimize risk of injury while large inner radii facilitates easy cleaning. Faucet deck with 4 faucet holes, 1 3/8" (35 mm). Integrated divider with overflow function made of MIRANIT, blue color (RAL 5002). 1 1/2" waste with 4 3/4" overflow valve are implemented as a standpipe for 2 of the 4 wash places. Integral back panel for mounting. Required waste fitting, model #100 (sold separately).

Version with basin right above/left below


18 1/2 x 82 5/8 x 13 3/8" Overall F-B x L-R x D

Bowl depth 7 7/8"

SANW212

OPTIONAL ACCESSORY

100 WASTE FITTING



UPC®

Model shown with center waste

LEDGES - BACK & LEFT

Single compartment self rimming drop-in sink with two adjoining faucet ledges. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Includes 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece. **For a 3 1/2" (89 mm) vandal-resistant grid strainer, order separately using part number 1300G.**

WASTE LOCATION

Center (C)

Center back (CB)

FAUCET HOLE OPTIONS (STANDARD)

When ordering a model number, indicate which faucet hole option is required by adding the following to the end of the model number; (eg. ALBLS4605P-1/4)

/2, 1 faucet hole, plus bubbler on left ledge

/4, 3 faucet holes, 8" centerset, plus bubbler on left ledge

CUSTOM FAUCET HOLES


Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

CHART NOTE


● Indicates model is wheelchair accessible.

These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.

Standard Hole Drilling Configurations

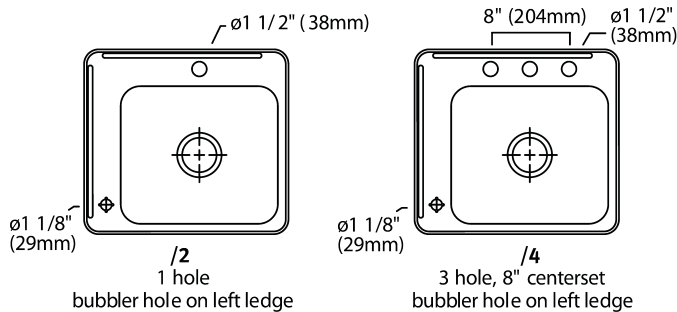

BUBBLER HOLE DETAIL




OVERALL DIMENSIONS				SINK COMPARTMENT DIMENSIONS			
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	WASTE LOCATION	FAUCET HOLES
● ALBLS4605P-1	18 13/16" (478 mm)	20 13/16" (529 mm)	14" (356 mm)	16" (406 mm)	5" (127 mm)	C	2, 4
● ALBLS4606P-1	18 13/16" (478 mm)	20 13/16" (529 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	C	2, 4
● LBL4608P-1	18 13/16" (478 mm)	20 13/16" (529 mm)	14" (356 mm)	16" (406 mm)	8" (203 mm)	C	2, 4
● ALBLS6406P-1	20 9/16" (523 mm)	18 9/16" (471 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	2, 4
● LBL6408P-1	20 9/16" (523 mm)	18 9/16" (471 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	2, 4
● ALBLS7005P-1	21 13/16" (554 mm)	24 13/16" (630 mm)	17" (432 mm)	20" (508 mm)	5" (127 mm)	CB	2, 4
● ALBLS7006P-1	21 13/16" (554 mm)	24 13/16" (630 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	CB	2, 4
● LBL7008P-1	21 13/16" (554 mm)	24 13/16" (630 mm)	17" (432 mm)	20" (508 mm)	8" (203 mm)	CB	2, 4

Classroom Sinks



cUPC®

Model shown with center waste



LEDGES - BACK & RIGHT

Single compartment self rimming topmount sink with two adjoining faucet ledges. 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Includes 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece. **For a 3 1/2" (89 mm) vandal-resistant grid strainer, order separately using part number 1300G.**

WASTE LOCATION

Center (C)
Center back (CB)

FAUCET HOLE OPTIONS (STANDARD)

When ordering a model number, indicate which faucet hole option is required by adding the following to the end of the model number; (eg. ALBRS4605P-1/2)
/2, 2 hole, 4" centerset, 1 1/2" diameter, centered over waste
/4, 3 faucet holes, 8" centerset, plus bubbler hole on left ledge


CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.


CHART NOTES

● Indicates model is wheelchair accessible.
These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.


Standard Hole Drilling Configurations

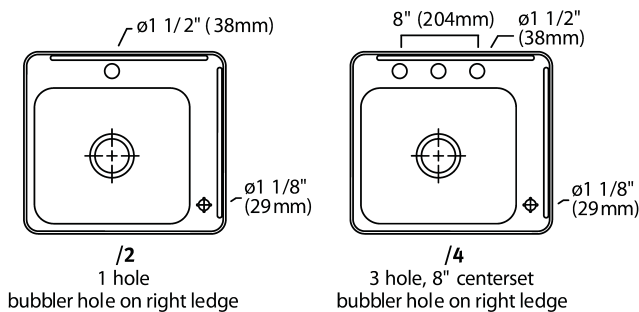

BUBBLER HOLE DETAIL




OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS				
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	WASTE LOCATION	FAUCET HOLE OPTIONS
● ALBRS4605P-1	18 13/16" (478 mm)	20 13/16" (529 mm)	14" (356 mm)	16" (406 mm)	5" (127 mm)	C	2, 4
● ALBRS4606P-1	18 13/16" (478 mm)	20 13/16" (529 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	C	2, 4
LBR4608P-1	18 13/16" (478 mm)	20 13/16" (529 mm)	14" (356 mm)	16" (406 mm)	8" (203 mm)	C	2, 4
● ALBRS7005P-1	21 13/16" (554 mm)	24 13/16" (630 mm)	17" (432 mm)	20" (508 mm)	5" (127 mm)	CB	2, 4
● ALBRS7006P-1	21 13/16" (554 mm)	24 13/16" (630 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	CB	2, 4
LBR7008P-1	21 13/16" (554 mm)	24 13/16" (630 mm)	17" (432 mm)	20" (508 mm)	8" (203 mm)	CB	2, 4

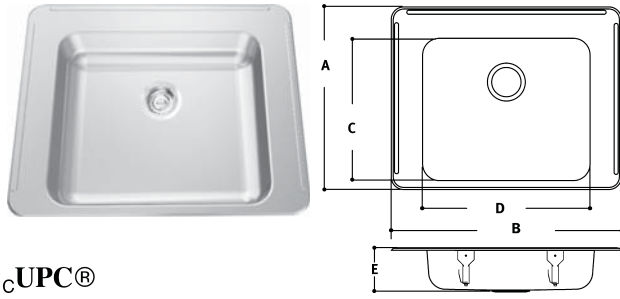


cUPC®

Model shown with center back waste

Standard Hole Drilling Configurations

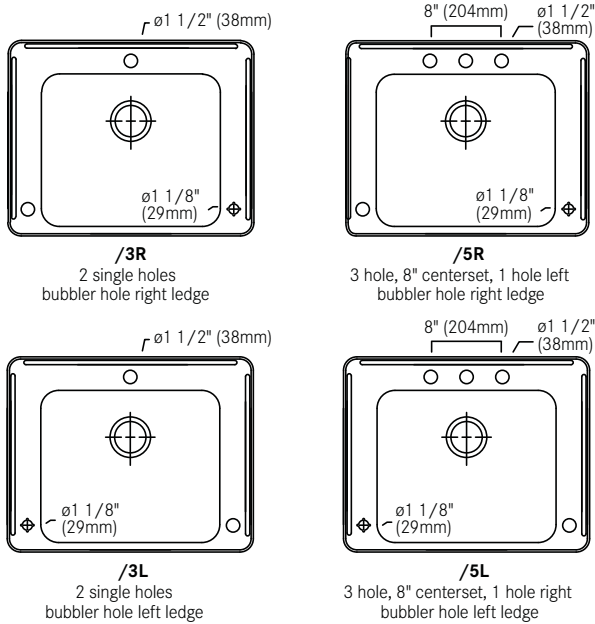

BUBBLER HOLE DETAIL



LEDGES - BACK, LEFT & RIGHT

Single compartment self rimming drop-in sink with triple ledge. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece. **For a 3 1/2" (89 mm) vandal-resistant grid strainer, order separately using part number 1300G.**

WASTE LOCATION

Center back (CB)

FAUCET HOLE OPTIONS (STANDARD)

When ordering a model number, indicate which faucet hole option is required by adding the following to the end of the model number; (eg. ALBLRS7005P-1/3R)

/3L, 2 single holes, bubbler hole left ledge

/3R, 2 single holes, bubbler hole right ledge

/5L, 3 faucet holes 8" centerset, plus 1 hole right ledge and bubbler hole left ledge

/5R, 3 faucet holes 8" centerset, plus 1 hole left ledge and bubbler hole right ledge

CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

CHART NOTES

- Indicates model is wheelchair accessible.


These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.

OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS				
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	WASTE LOCATION	FAUCET HOLE OPTIONS
● ALBLRS7005P-1	21 13/16" (554 mm)	27 1/2" (699 mm)	17" (432 mm)	20" (508 mm)	5" (127 mm)	CB	3L, 3R, 5L, 5R
● ALBLRS7006P-1	21 13/16" (554 mm)	27 1/2" (699 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	CB	3L, 3R, 5L, 5R
● LBLRS7008P-1	21 13/16" (554 mm)	27 1/2" (699 mm)	17" (432 mm)	20" (508 mm)	8" (203 mm)	CB	3L, 3R, 5L, 5R

Classroom Sinks




cUPC®



Model shown with center back waste

Standard Hole Drilling Configurations

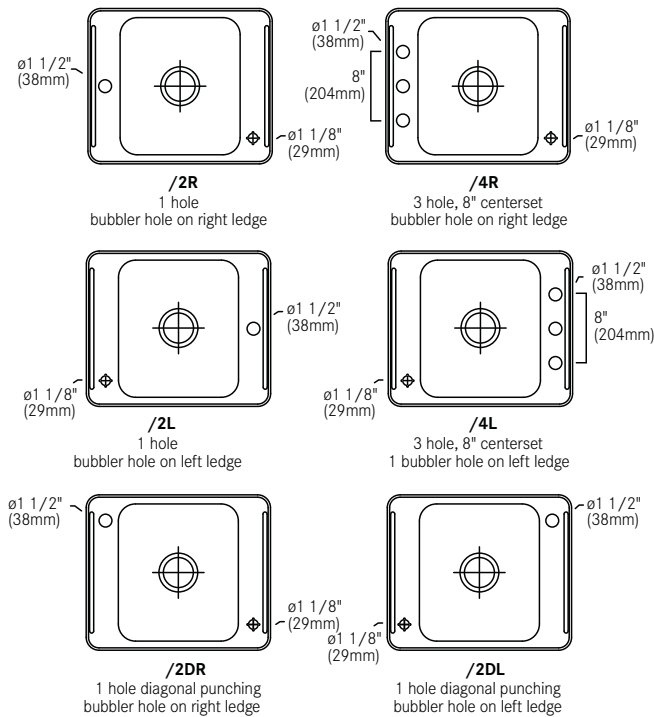

LEDGES - OPPOSING

Single compartment self rimming drop-in sink with two opposing faucet ledges. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Includes 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece. **For a 3 1/2" (89 mm) vandal-resistant grid strainer, order separately using part number 1300G.**

WASTE LOCATION

Center (C)

Center back (CB)

FAUCET HOLE OPTIONS (STANDARD)

When ordering a model number, indicate which faucet hole option is required by adding the following to the end of the model number; (eg. ALHS4605P-1/2R)

/2R, 1 faucet hole plus bubbler hole on right ledge

/4R, 3 faucet holes plus bubbler hole on right ledge

/2DR, 1 faucet hole, diagonal punching, with bubbler hole on right ledge

/2L, 1 faucet hole plus bubbler hole on left ledge

/4L, 3 faucet holes plus bubbler hole on left ledge

/2DL, 1 faucet hole, diagonal punching, with bubbler hole on left ledge


CUSTOM FAUCET HOLES


Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

CHART NOTES

● Indicates model is wheelchair accessible.


These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.



OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS				WASTE LOCATION	FAUCET HOLE OPTIONS
 MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)			
● ALHS4605P-1	16 1/8" (410 mm)	23 1/2" (597 mm)	14" (356 mm)	16" (406 mm)	5" (127 mm)	C	2L, 2R, 2DL, 2DR, 4L, 4R	
● ALHS4606P-1	16 1/8" (410 mm)	23 1/2" (597 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	C	2L, 2R, 2DL, 2DR, 4L, 4R	
LHS4608P-1	16 1/8" (410 mm)	23 1/2" (597 mm)	14" (356 mm)	16" (406 mm)	8" (203 mm)	C	2L, 2R, 2DL, 2DR, 4L, 4R	
● ALHS6405P-1	18 1/8" (460 mm)	21 1/2" (546 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	CB	2L, 2R, 2DL, 2DR, 4L, 4R	
● ALHS6406P-1	18 1/8" (460 mm)	21 1/2" (546 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	2L, 2R, 2DL, 2DR, 4L, 4R	
LHS6408P-1	18 1/8" (460 mm)	21 1/2" (546 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	2L, 2R, 2DL, 2DR, 4L, 4R	
● ALHS7305P-1	19 1/8" (486 mm)	30 1/2" (775 mm)	17" (432 mm)	23" (584 mm)	5" (127 mm)	CB	2L, 2R, 2DL, 2DR, 4L, 4R	
● ALHS7306P-1	19 1/8" (486 mm)	30 1/2" (775 mm)	17" (432 mm)	23" (584 mm)	6" (152 mm)	CB	2L, 2R, 2DL, 2DR, 4L, 4R	
LHS7308P-1	19 1/8" (486 mm)	30 1/2" (775 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	2L, 2R, 2DL, 2DR, 4L, 4R	
● ALHS8605P-1	20 1/8" (511 mm)	23 1/2" (597 mm)	18" (457 mm)	16" (406 mm)	5" (127 mm)	C	2L, 2R, 2DL, 2DR, 4L, 4R	
● ALHS8606P-1	20 1/8" (511 mm)	23 1/2" (597 mm)	18" (457 mm)	16" (406 mm)	6" (152 mm)	C	2L, 2R, 2DL, 2DR, 4L, 4R	
LHS8608P-1	20 1/8" (511 mm)	23 1/2" (597 mm)	18" (457 mm)	16" (406 mm)	8" (203 mm)	C	2L, 2R, 2DL, 2DR, 4L, 4R	



cUPC®



LEDGE - RIGHT

Single compartment self rimming drop-in sink with faucet ledge. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Includes 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece. **For a 3 1/2" (89 mm) vandal-resistant grid strainer, order separately using part number 1300G.**

WASTE LOCATION
Center (C)

FAUCET HOLE OPTIONS (STANDARD)

When ordering a model number, indicate which faucet hole option is required by adding the following to the end of the model number; (eg. ALRS4605P-1/2)
/1, 1 faucet hole, 1 1/2" (38 mm)
/2, 2 faucet holes, 1 1/2" (38 mm), 4" centerset
/3, 3 faucet holes, 1 1/2" (38 mm), 8" centerset



CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.


CHART NOTES

● Indicates model is wheelchair accessible.
These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.

Standard Hole Drilling Configurations

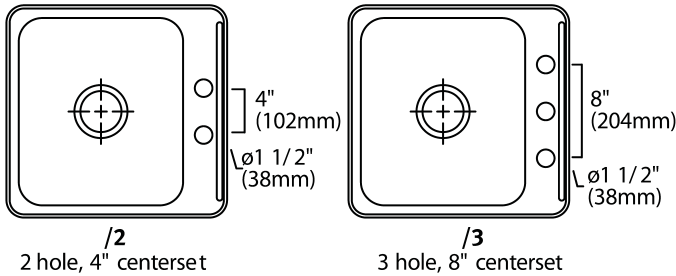


BUBBLER HOLE DETAIL



OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS				
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	WASTE LOCATION	FAUCET HOLE OPTIONS
● ALRS4605P-1	16 1/8" (410 mm)	20 13/16" (529 mm)	14" (356 mm)	16" (406 mm)	5" (127 mm)	C	1, 2, 3L
● ALRS4606P-1	16 1/8" (410 mm)	20 13/16" (529 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	C	1, 2, 3
● LRS4608P-1	16 1/8" (410 mm)	20 13/16" (529 mm)	14" (356 mm)	16" (406 mm)	8" (203 mm)	C	1, 2, 3

Classroom Sinks

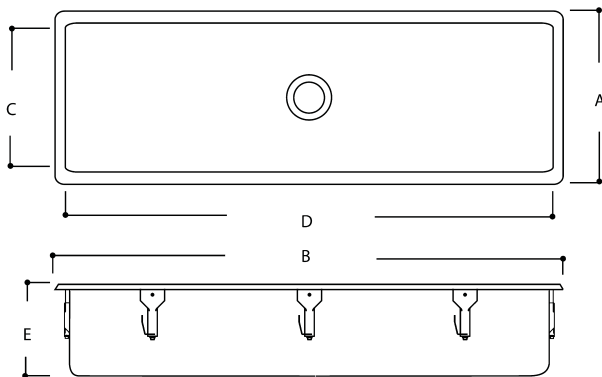

cUPC®

ART ROOM SINKS - 18 GAUGE

Single compartment self rimming drop-in sink less faucet ledge. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.


WASTE OPTIONS

(Indicated in model number, eg, ART36-3C)

- The suffix [-1] indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.
- The suffix [-3C] indicates a 1 1/2" (38mm) duplex waste assembly with rubber stopper and 1 1/2" (DN38) brass tailpiece.


WASTE LOCATION

Center (C)

OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS			WASTE LOCATION	FAUCET HOLE OPTIONS
 MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)		
ART36-1	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	N/A
ART48-1	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	N/A
ART60-1	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	N/A
ART36-3C	19 1/8" (486 mm)	38 1/8" (968 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	N/A
ART48-3C	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	N/A
ART60-3C	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	N/A

Type 316 Laboratory Sinks

37

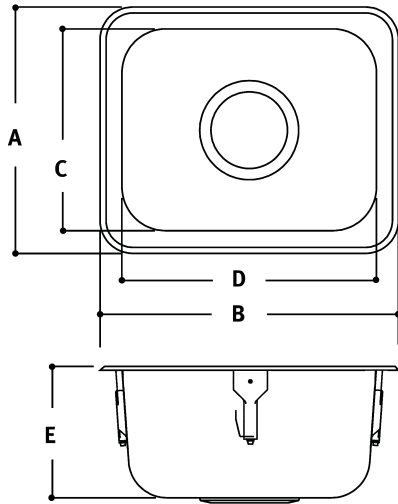

UPC®

SINGLE, 18 GAUGE, NO FAUCET LEDGE

Single compartment self rimming topmount sink less faucet ledge. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

WASTE OPTIONS

(Indicated in model number, eg. S9106/316P-1)

- The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece
- The suffix (-3) indicates a 1 1/2" (38mm) duplex waste assembly with rubber stopper and 1 1/2" (DN38) brass tailpiece

WASTE LOCATION


Center (C)
Center back (CB)
Left rear (LR)

CHART NOTES

- Indicates model is wheelchair accessible.
- These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.

		OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS				
	MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	WASTE LOCATION	FAUCET HOLES
●	S9106/316P-1	11 1/4" (286 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	N/A
●	S9106/316P-3	11 1/4" (286 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	N/A
	S9407/316P-1	11 5/8" (295 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	7" (178 mm)	C	N/A
	S9407/316P-3	11 5/8" (295 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	7" (178 mm)	C	N/A
	S6407/316P-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	N/A
	S6410/316PCB-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	N/A
	S6808/316P-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	N/A
	S6810/316P-3	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	LR	N/A
	S6810/316P-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	N/A

Type 316 Laboratory Sinks

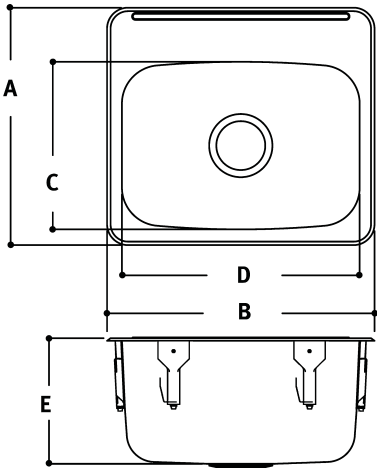

cUPC®

SINGLE, 18 GAUGE, WITH LEDGE, CENTER WASTE

Single compartment self rimming topmount sink with faucet ledge. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

WASTE OPTIONS

(Indicated in model number, eg. ZLBS9407/316P-1)

- The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece
- The suffix (-3) indicates a 1 1/2" (38mm) duplex waste assembly with rubber stopper and 1 1/2" (DN38) brass tailpiece

WASTE LOCATION

Center (C)


FAUCET HOLE OPTIONS

When ordering a model number, indicate which faucet hole option is required by adding the following to the end of the model number; (eg. ZLBS9407/316P-3/2)

- /1, 1 hole, 1 1/2" diameter
- /2, 2 hole, 4" spread, 1 1/2" diameter
- /3, 3 hole, 8" spread, 1 1/2" diameter
- 3 faucet holes, 1 1/2" diameter, 8" spread



CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.


OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS				
 MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	WASTE LOCATION	FAUCET HOLE OPTIONS
ZLBS9407/316P-1	14 5/16" (364 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	7" (178 mm)	C	1, 2
ZLBS9407/316P-3	14 5/16" (364 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	7" (178 mm)	C	1, 2
ZLBS4607/316P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	7" (178 mm)	C	1, 3
ZLBS4610/316P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	10" (254 mm)	C	1, 2, 3
ZLBS4610/316PC-3	18 9/16" (471 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	10" (254 mm)	C	1, 3
ZLBS6810/316P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1, 3



cUPC®

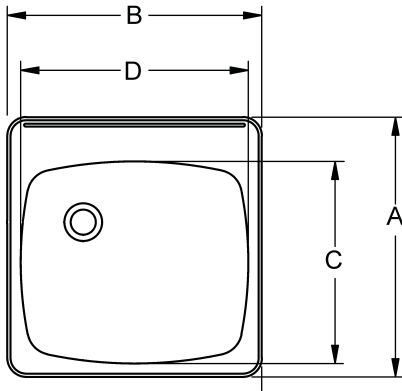

cUPC®

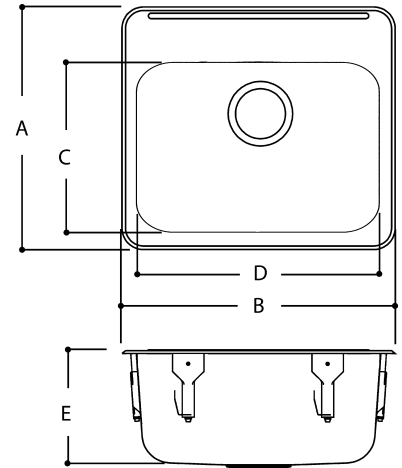

SINGLE, 18 GAUGE, WITH LEDGE

Single compartment self rimming topmount sink with faucet ledge. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

WASTE OPTIONS

(Indicated in model number, eg. ZLBS6810/316P-3)

- The suffix (-1) indicates a 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece
- The suffix (-3) indicates a 1 1/2" (38 mm) duplex waste assembly with rubber stopper and 1 1/2" (DN38) brass tailpiece

WASTE LOCATION

Center back (CB)

Left rear (LR)

FAUCET HOLE OPTIONS

When ordering a model number, indicate which faucet hole option is required by adding the following to the end of the model number; (eg. ZLBS6807/316P-1/3)

/1, 1 faucet hole, 1 1/2" diameter.

/3, 3 faucet holes, 1 1/2" diameter, 8" spread.



CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

CHART NOTES

- Indicates model is wheelchair accessible.


These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.

		OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS				
	MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	WASTE LOCATION	FAUCET HOLES
	ZLBS6407/316P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	1, 3
	ZALBS6805/316P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LR	1, 3
	ZLBS6807/316P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1, 3
	ZLBS6808/316P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1, 3
	ZLBS6810/316P-3	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	LR	1, 3

Type 316 Laboratory Sinks



cUPC®




UNDERMOUNT, SINGLE, 18 GAUGE, 14x16x8"

Single compartment undermount sink. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, cutout template, and installation hardware. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Center waste location, 3 1/2 in. (89 mm) type 316 (EN1.4401 17/12/2) stainless steel crumb cup strainer with 1 1/2 in. (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece.

UCS4608/316P-1



cUPC®




UNDERMOUNTS, SINGLE, 18 GAUGE, DEPTH - 14x16x10"

Single compartment undermount sink. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, cutout template, and installation hardware. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Center waste location, 3 1/2" (89 mm) type 316 (EN1.4401 17/12/2) stainless steel crumb cup strainer with 1 1/2" (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece.

UCS4610/316P-1



cUPC®

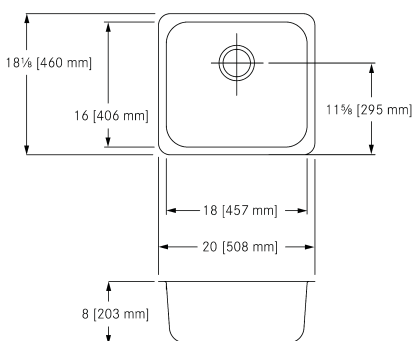


UNDERMOUNTS, SINGLE, 18 GAUGE, DEPTH - 16x18x8"

Single compartment undermount sink. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, cutout template, and installation hardware. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Center back waste location, 3 1/2" (89 mm) type 316 (EN1.4401 17/12/2) stainless steel crumb cup strainer with 1 1/2" (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece.

UCS6808/316P-1






cUPC®

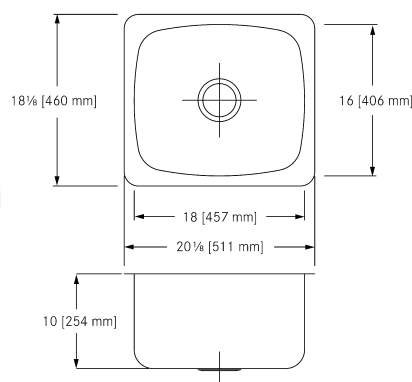

UNDERMOUNTS, SINGLE, 18 GAUGE, DEPTH - 16x18x10"

Single compartment undermount sink. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, cutout template, and installation hardware. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Center waste location, 3 1/2" (89 mm) type 316 (EN1.4401 17/12/2) stainless steel crumb cup strainer with 1 1/2" (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece.

UCS6810/316P-1

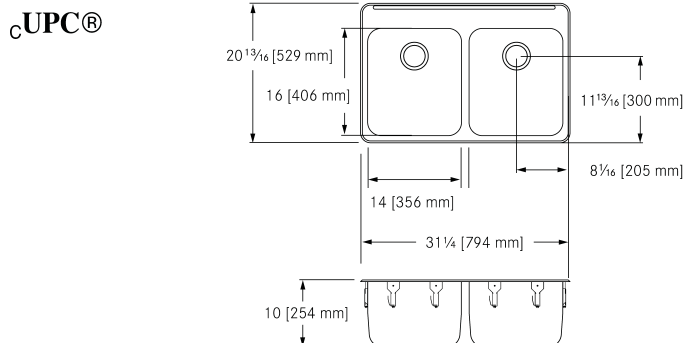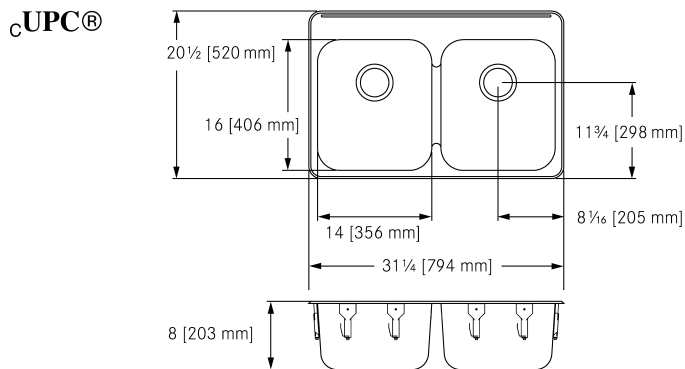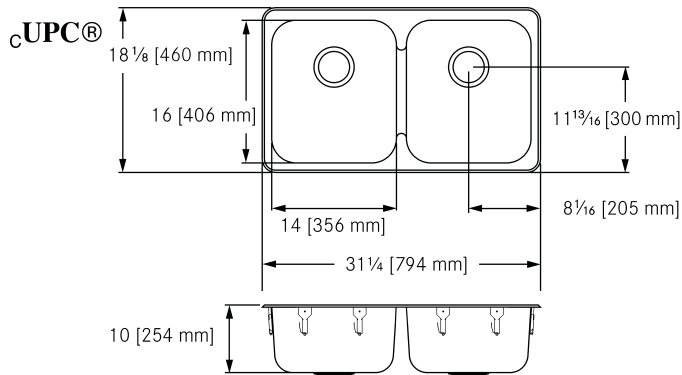

DOUBLE, 18 GAUGE, WITHOUT LEDGE, 16x14x10"

Double compartment self rimming topmount sink less faucet ledge. 18 gauge (1.2 mm), type 316 (CNS 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fittings, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Center back waste location, 3 1/2" (89 mm) type 316 (EN1.4401 17/12/2) stainless steel crumb cup strainer with 1 1/2" (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece.

D6410/316PCB-1

DOUBLE, 18 GAUGE, WITH LEDGE, 16x14x8"

Double compartment self rimming topmount sink with faucet ledge. Center back waste location. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes factory applied rim seal, factory installed EZ TORQUE™ fasteners and 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Center back waste location, 3 1/2" (89 mm) type 316 crumb cup waste.

Model Options:

ZLBD6408/316P-1/1, 1 faucet hole, 1 1/2" diameter
ZLBD6408/316P-1/3, 3 faucet holes, 1 1/2" diameter, 8" spread
ZLBD6408/316P-1/4, 4 faucet holes total, 1 1/2" diameter, 8" spread, plus 1 faucet hole 4" to the right (non-returnable).
ZLBD6408/316P-1, Custom (non-returnable).

ZLBD6408/316P-1

DOUBLE, 18 GAUGE, WITH LEDGE, 16x14x10"

Double compartment self rimming topmount sink with faucet ledge. Center back waste location. 18 gauge (1.2 mm), type 316 (EN1.4401 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes factory applied rim seal, factory installed EZ TORQUE™ fasteners, and waste kit. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Center back waste location. Includes 3 1/2" (89 mm) type 316 (EN1.4401 17/12/2) stainless steel crumb cup strainer with 1 1/2" (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece.

Model Options:


ZLBD6410/316PCB-1/1, 1 faucet hole, 1 1/2" diameter, centered over partition
ZLBD6410/316PCB-1/3, 3 faucet holes, 8" spread, 1 1/2" diameter, centered over partition
ZLBD6410/316PCB-1/X, Custom (non-returnable).

ZLBD6410/316PCB-1

Type 316 Laboratory Sinks



cUPC®

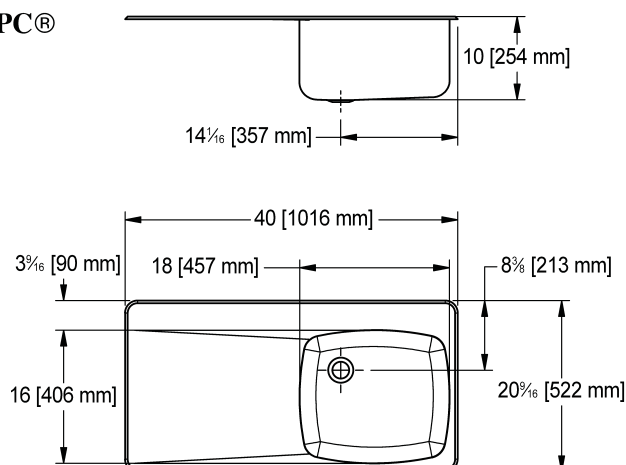

DRAINBOARD LEFT, 18 GAUGE

Single compartment self rimming topmount sink with faucet ledge and Drainboard. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Waste fittings included. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Note: Please allow 4 weeks for delivery. Drainboard is located to the left of sink bowl and is sloped for drainage. Center waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

Model Options:

LBSDL6810/316P-1/1, 1 faucet hole, 1 1/2" diameter


LBSDL6810/316P-1/3, 3 faucet holes, 1 1/2" diameter, 8" spread

LBSDL6810/316P-1, Custom (non-returnable).

LBSDL6810/316P-1



cUPC®

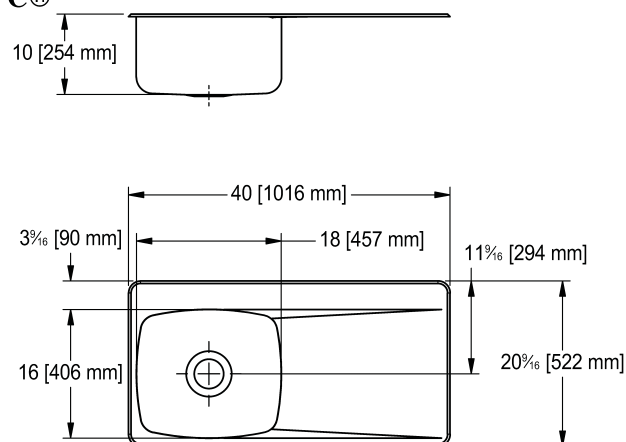

DRAINBOARD RIGHT, 18 GAUGE

Single compartment self rimming topmount sink with faucet ledge and Drainboard. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Waste fittings included. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Note: Please allow 4 weeks for delivery. Drainboard is located to the right of sink bowl and is sloped for drainage. Center waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

Model Options:

LBSDR6810/316P-1/1, 1 faucet hole, 1 1/2" diameter


LBSDR6810/316P-1/3, 3 faucet holes, 1 1/2" diameter, 8" spread

LBSDR6810/316P-1, Custom (non-returnable).

LBSDR6810/316P-1



cUPC®

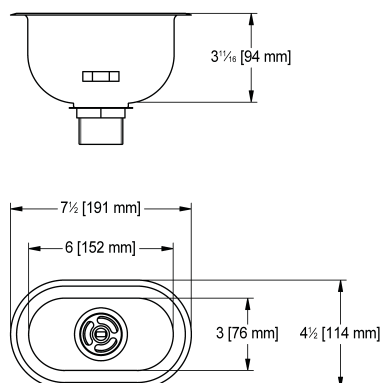

CUP SINK, 20 GAUGE, OVAL

Single bowl commercial laboratory sink. 20 gauge (0.9 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are sand-blast finished. Positive hold down clamping. 1 1/2" (38 mm) type 316 (EN1.4401 17/12/2) stainless steel duplex waste assembly is integral (tailpiece optional*). Certified to ASME A112.19.3-2008 / CSA B45.4-08.


Center waste location.

These sinks do not include tailpiece. A type 316 tailpiece is available by ordering 315-9/316.

OC6/316

OPTIONAL ACCESSORY

315-9/316

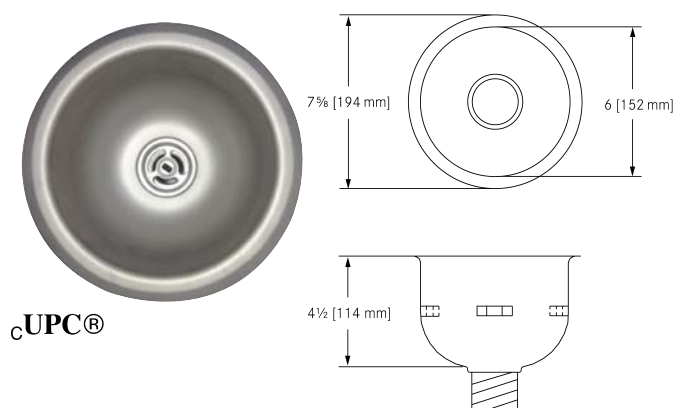

CUP SINK, 20 GAUGE, ROUND


Single bowl commercial laboratory sink. 20 gauge (0.9 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are sand-blast finished. Positive hold down clamping. 1 1/2" (38 mm) type 316 (EN1.4401 17/12/2) stainless steel duplex waste assembly is integral (tailpiece optional*). Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Center waste location. These sinks do not include tailpiece. A type 316 tailpiece is available by ordering 315-9/316.

RC6/316

OPTIONAL ACCESSORY

315-9/316

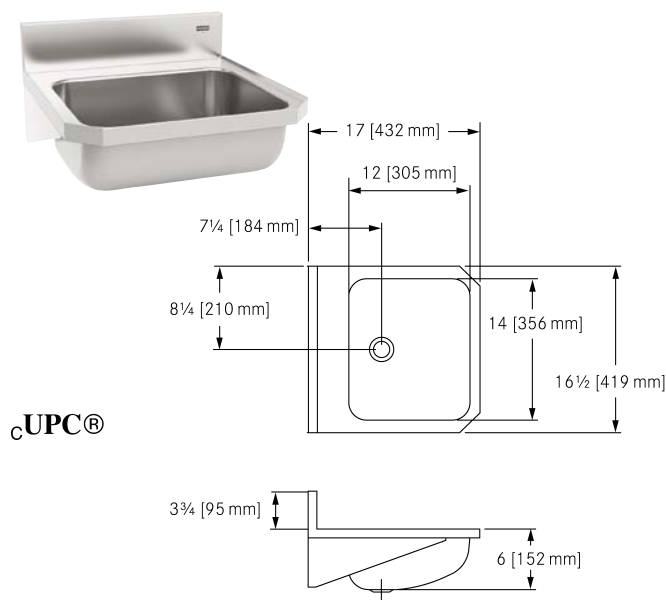

WALL HUNG, INSTITUTIONAL, 18 GAUGE, DEPTH - 6"

Wall hung basin. Center back waste location. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are polished #4 satin finished. Radius coved bowl corners.

One piece wall hanger. Includes type 316 (EN1.4401 17/12/2) 1 1/2" (38 mm) duplex waste assembly with rubber stopper and 1 1/2" (DN38) brass tailpiece. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Separate sink carrier is not required. no faucet hole / custom drilling.

Model Options:

WHB1617/316-3/1, 1 faucet hole, 1 1/2" diameter


WHB1617/316-3/3, 3 faucet holes, 1 1/2" diameter, 4" spread

WHB1617/316-3, Custom (non-returnable).

WHB1617/316-3

OPTIONAL ACCESSORY

WT-RS

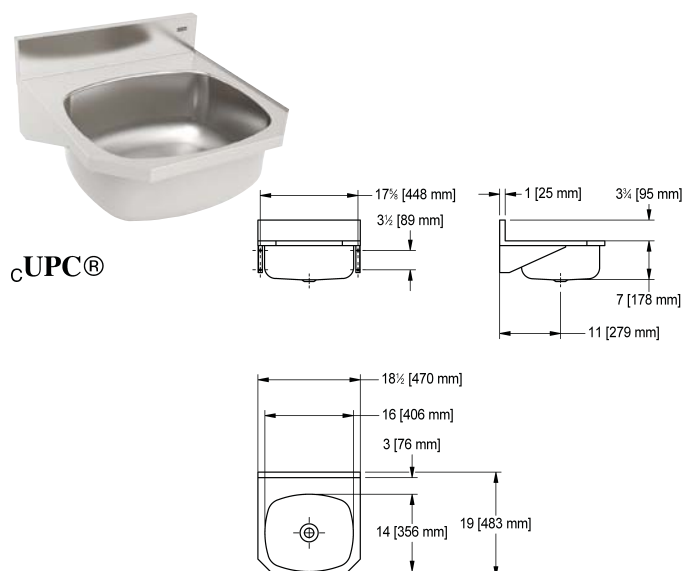

WALL HUNG, INSTITUTIONAL, 18 GAUGE, DEPTH - 7"

Wall hung basin. Center back waste location. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are polished #4 satin finished. Radius coved bowl corners.

One piece wall hanger. Includes type 316 (EN1.4401 17/12/2) 1 1/2" (38 mm) duplex waste assembly with rubber stopper and 1 1/2" (DN38) brass tailpiece. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Separate sink carrier is not required.

Model Options:


WHB1819/316-3/1, 1 faucet hole, 1 1/2" diameter

WHB1819/316-3/3, 3 faucet holes, 1 1/2" diameter, 4" spread (non-returnable)

WHB1819/316-3, Custom (non-returnable).

WHB1819/316-3

Type 316 Laboratory Sinks

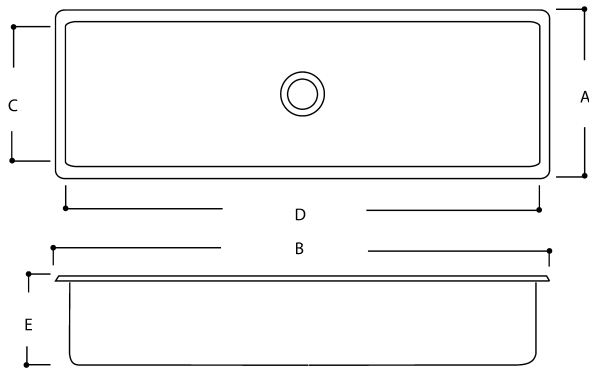

cUPC®

ART ROOM SINK, 18 GAUGE, NO LEDGE


Single compartment self rimming topmount sink without faucet ledge. 18 gauge (1.2 mm), type 316 (EN1.4401 17/12/2) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Center waste location.



WASTE OPTIONS

- (Indicated in model number, eg. ART36/316-1)
- The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.
 - The suffix (-3C) indicates an 1 1/2" (38mm) type 316 (EN1.4401 17/12/2) stainless steel duplex waste assembly with rubber stopper and 1 1/2" (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece.

WASTE LOCATION

- Center (C)
Center back (CB)
Left rear (LR)

OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS				
 MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	WASTE LOCATION	FAUCET HOLES
ART36/316-1	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	N/A
ART36/316-3C	19 1/8" (486 mm)	38 1/8" (969 mm)	17" (432 mm)	36" (914 mm)	8" (203 mm)	C	N/A
ART48/316-1	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	N/A
ART48/316-3C	19 1/8" (486 mm)	50 1/8" (1273 mm)	17" (432 mm)	48" (1219 mm)	8" (203 mm)	C	N/A
ART60/316-1	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	N/A
ART60/316-3C	19 1/8" (486 mm)	62 1/8" (1578 mm)	17" (432 mm)	60" (1524 mm)	8" (203 mm)	C	N/A

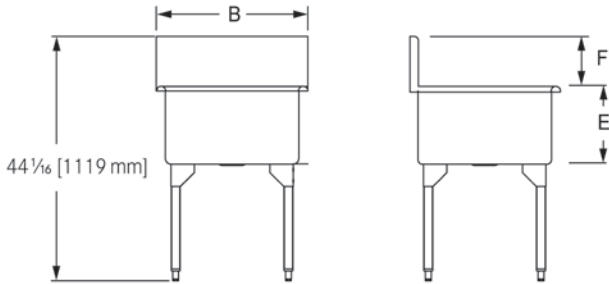

cUPC®

SCULLERY SINK, 16 GAUGE

Single compartment scullery sink. 16 gauge (1.5 mm), type 316 (EN1.4401 17/12/2) stainless steel. Polished to a #4 satin finish. Sink compartment sloped to drain with radius coved corners on front and back only. Rolled rim. Stainless steel tubular legs with adjustable feet. Type 316 (EN1.4401 17/12/2) waste fitting included. Certified to ASME A112.19.3-2008 / CSA B45.4-08. This series of scullery sinks are built to order and are non-returnable.

WASTE LOCATION

Center (C)
Right rear (RR)

WASTE OPTIONS

- (Indicated in model number, eg. SL2424/316-1)
- The suffix (-1) indicates a 3 1/2" (89mm) type 316 (EN1.4401 17/12/2) stainless steel crumb cup strainer with 1 1/2" (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece.
 - The suffix (-5) indicates a 1 1/2" (38mm) type 316 (EN1.4401 17/12/2) stainless steel duplex waste assembly with rubber stopper and 1 1/2" (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece with standpipe and guard.

FAUCET HOLE OPTIONS (STANDARD)

2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.

CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

FLOOR TO RIM


35" (890mm)

BACKSPLASH

9" (230 mm)

OVERALL DIMENSIONS				SINK COMPARTMENT DIMENSIONS				
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	F BACKSPLASH	WASTE LOCATION	FAUCET HOLES
SL2424/316-1	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C	2
SL2424/316-5	27 3/16" (691 mm)	27 3/16" (691 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR	2
SL2448/316-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR	2
SL2448/316-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	C	2

Single Topmount Sinks

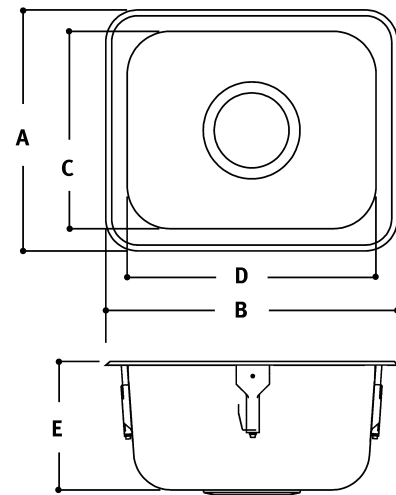

UPC®

WITHOUT FAUCET LEDGE - 20 AND 18 GAUGE

WASTE OPTIONS

(Indicated in model number, eg. S9106-1)

- The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece
- The suffix (-3) indicates a 1 1/2" (38 mm) duplex waste assembly with rubber stopper and 1 1/2" (DN38) brass tailpiece

WASTE LOCATION

Center (C)

Center back (CB)

WITHOUT FAUCET LEDGE - 20 GAUGE


Single compartment self rimming topmount sink less faucet ledge. 20 gauge (0.9mm), type 302 (CNS 18/8) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS			WASTE LOCATION	FAUCET HOLE OPTIONS
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)		
• S9106-1	11 1/4" (286 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	N/A
• S9106-3	11 1/4" (286 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	N/A
S9407-1	11 5/8" (295 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	7" (178 mm)	C	N/A
• S4206-1	16 1/8" (410 mm)	14 1/8" (359 mm)	14" (356 mm)	12" (305 mm)	6" (152 mm)	CB	N/A
S6408-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	N/A
S6808-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	N/A
S7308-1	19 1/4" (489 mm)	25 1/4" (641 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	N/A

WITHOUT FAUCET LEDGE, 18 GAUGE

Single compartment self rimming topmount sink less faucet ledge. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS			WASTE LOCATION	FAUCET HOLE OPTIONS
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)		
S6810-1	18 1/8" (460 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	N/A

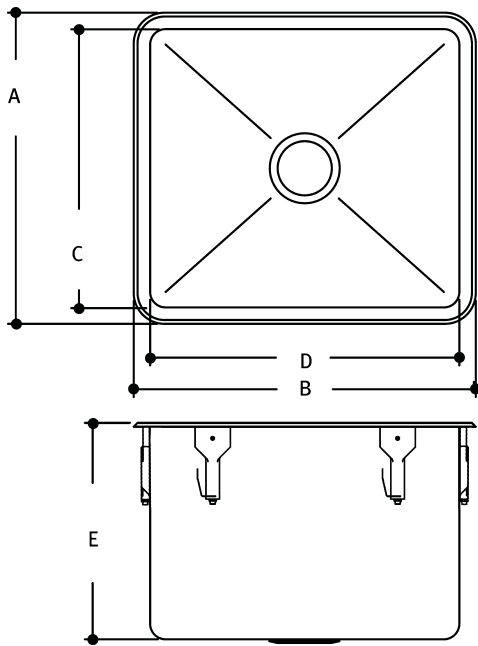

UPC®

WITHOUT FAUCET LEDGE - 18 GAUGE

Single compartment self rimming topmount sink less faucet ledge. 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Center back waste location. Includes waste assembly.

WASTE OPTIONS

(Indicated in model number, eg. S6410PBC-1)

- The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece
- The suffix (-2) indicates a 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece and integral overflow kit

WASTE LOCATION


Center (C)
Center back (CB)

CHART NOTES

- Indicates model is wheelchair accessible.
- These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.

OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS			WASTE LOCATION	FAUCET HOLE OPTIONS
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)		
● AS6105P-1	18 1/8" (460 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	5" (127 mm)	CB	N/A
S6108P-1	18 1/8" (460 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	8" (203 mm)	CB	N/A
S6410PCB-1	18 1/8" (460 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	N/A
S7310P-1	19 1/4" (489 mm)	25 1/4" (641 mm)	17" (432 mm)	23" (584 mm)	10" (254 mm)	CB	N/A
S7312P-1	19 5/8" (498 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	12" (305 mm)	C	N/A
S7314P-1	19 5/8" (498 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	14" (356 mm)	C	N/A
S8014P-1	20 1/8" (511 mm)	22 1/8" (562 mm)	18" (457 mm)	20" (508 mm)	14" (356 mm)	C	N/A

Single Topmount Sinks

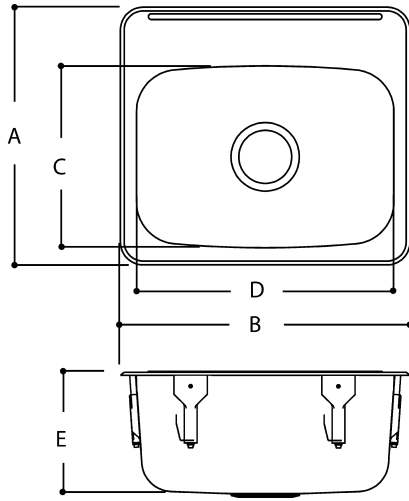

cUPC®

WITH FAUCET LEDGE - 20 GAUGE

Single compartment self rimming topmount sink with faucet ledge. 20 gauge (0.9 mm), type 302 (CNS 18/8) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Includes waste assembly.

WASTE OPTIONS

(Indicated in model number, eg. ZLBS9106-1)

- The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece
- The suffix (-2) indicates a 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece and integral overflow
- The suffix (-3) indicates a 1 1/2" (38mm) duplex waste assembly with rubber stopper and 1 1/2" (DN38) brass tailpiece

WASTE LOCATION

Center (C)

Center back (CB)

Left rear (LR)

FAUCET HOLE OPTIONS

When ordering a model number, indicate which faucet hole option is required by adding the following to the end of the model number; (eg. ZLBS9106-1/2)

/1, 1 hole, 1 1/2" diameter

/2, 2 hole, 4" spread, 1 1/2" diameter

/3, 3 hole, 8" spread, 1 1/2" diameter

CUSTOM FAUCET HOLES


Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

CHART NOTES

- Indicates model is wheelchair accessible.

These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.

OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS				
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	WASTE LOCATION	FAUCET HOLE OPTIONS
● ZLBS9106-1	13 3/4" (349 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	1, 2
● ZLBS9106-3	13 3/4" (349 mm)	13 5/8" (346 mm)	9 1/4" (235 mm)	11 5/8" (295 mm)	6" (152 mm)	C	1, 2
ZLBS9407-1	14 5/16" (364 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	7" (178 mm)	C	1, 2
ZLBS9407-3	14 5/16" (364 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	7" (178 mm)	C	1, 2
● ZLBS1306-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	6" (152 mm)	C	1, 2, 3
ZLBS2708-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	8" (203 mm)	C	1, 3
ZLBS4607-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	7" (178 mm)	C	1, 3
● ZALBS6405-1	20 9/16" (523 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	CB	1, 3
● ZALBS6805-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LR	1, 3
ZLBS6807-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1, 3
ZLBS6807-2	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	7" (178 mm)	CB	1, 3
ZLBS6808-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1, 3
ZLBS6808-2	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1, 3
ZLBS6810-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1, 3
ZLBS7508-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1, 3
ZLBS7308-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	1, 3

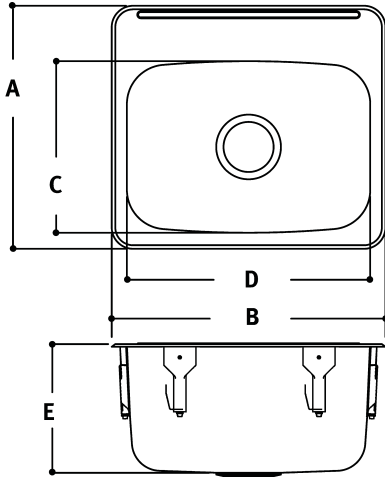

UPC®

WITH FAUCET LEDGE - 18 GAUGE

Wheelchair accessible, single compartment, self rimming topmount sink with faucet ledge. 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Includes 3 1/2" waste assembly.

WASTE OPTIONS

(Indicated in model number, eg. ZALBS9405P-1)

The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece

WASTE LOCATION

Center (C)
Center back (CB)

FAUCET HOLE OPTIONS (STANDARD)

When ordering a model number, indicate which faucet hole option is required by adding the following to the end of the model number; (eg. ZALBS9405P-1/2)

/1, 1 hole, 1 1/2" diameter, centered over waste
/2, 2 hole, 4" spread, 1 1/2" diameter, centered over waste
/3, 3 hole, 8" spread, 1 1/2" diameter, centered over waste

CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

CHART NOTES

● Indicates model is wheelchair accessible.


These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.

	OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS			WASTE LOCATION	FAUCET HOLE OPTIONS
	MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)		
●	ZALBS9405P-1	14 5/16" (364 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	5" (127 mm)	C	1, 2
●	ZALBS9406P-1	14 5/16" (364 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	6" (152 mm)	C	1, 2
	ZLBS9408P-1	14 5/16" (364 mm)	16 5/8" (422 mm)	9 1/2" (241 mm)	14 1/2" (368 mm)	8" (203 mm)	C	1, 2
●	ZALBS1305P-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	5" (127 mm)	C	1, 2
●	ZALBS1306P-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	6" (152 mm)	C	1, 2
	ZLBS1308P-1	15 7/16" (392 mm)	15 1/8" (384 mm)	11" (279 mm)	13" (330 mm)	8" (203 mm)	C	1, 2, 3
●	ZALBS2705P-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	5" (127 mm)	C	1, 3
●	ZALBS2706P-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	6" (152 mm)	C	1, 3
	ZLBS2708P-1	17" (432 mm)	19 1/8" (486 mm)	12" (305 mm)	17" (432 mm)	8" (203 mm)	C	1, 3
●	ZALBS4405P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	CB	1, 3
●	ZALBS4406P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	CB	1, 3
	ZLBS4408P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3
	ZLBS4410P-1	18 13/16" (478 mm)	16 1/8" (410 mm)	14" (356 mm)	14" (356 mm)	10" (254 mm)	CB	1, 3
●	ZALBS4605P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	5" (127 mm)	C	1, 3
●	ZALBS4606P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	6" (152 mm)	C	1, 3
	ZLBS4608P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	8" (203 mm)	C	1, 3
	ZLBS4610P-1	18 13/16" (478 mm)	18 1/8" (460 mm)	14" (356 mm)	16" (406 mm)	10" (254 mm)	C	1, 3

Single Topmount Sinks



cUPC®

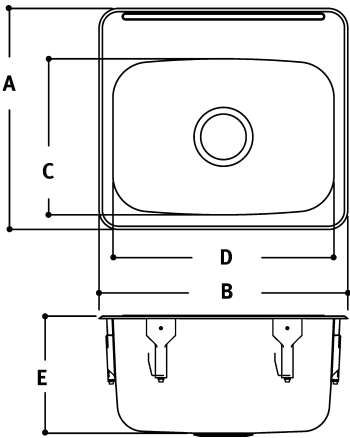

WITH FAUCET LEDGE - 18 GAUGE


		OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			WASTE LOCATION	FAUCET HOLE OPTIONS
	MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)		
●	ZALBS4005P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	5" (127 mm)	CB	1, 3
●	ZALBS4006P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	6" (152 mm)	CB	1, 3
	ZLBS4008P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	8" (203 mm)	CB	1, 3
	ZLBS4010P-1	18 13/16" (478 mm)	22 1/8" (562 mm)	14" (356 mm)	20" (508 mm)	10" (254 mm)	CB	1, 3
●	ZALBS6405P-1	20 9/16" (523 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	CB	1, 3
●	ZALBS6406P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	1, 3
	ZLBS6408P-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3
	ZLBS6410PCB-1	20 9/16" (522 mm)	16 1/8" (410 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	1, 3
●	ZALBS6805P-1	20 9/16" (522 mm)	20 1/8" (511 mm)	16" (406 mm)	18" (457 mm)	5" (127 mm)	LR	1, 3
●	ZALBS6806P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	6" (152 mm)	CB	1, 3
	ZLBS6808P-1	20 1/2" (521 mm)	20" (508 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1, 3
	ZLBS6810P-1	20 9/16" (521 mm)	20 1/8" (508 mm)	16" (406 mm)	18" (457 mm)	10" (254 mm)	C	1, 3
●	ZALBS6105P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	5" (127 mm)	CB	1, 3
●	ZALBS6106P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	6" (152 mm)	CB	1, 3
	ZLBS6108P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	8" (203 mm)	CB	1, 3
	ZLBS6110P-1	20 13/16" (529 mm)	23 1/8" (587 mm)	16" (406 mm)	21" (533 mm)	10" (254 mm)	CB	1, 3
●	ZALBS7005P-1	21 13/16" (554 mm)	22 1/8" (562 mm)	17" (432 mm)	20" (508 mm)	5" (127 mm)	CB	1, 3
●	ZALBS7006P-1	21 13/16" (554 mm)	22 1/8" (562 mm)	17" (432 mm)	20" (508 mm)	6" (152 mm)	CB	1, 3
	ZLBS7008P-1	21 13/16" (554 mm)	22 1/8" (562 mm)	17" (432 mm)	20" (508 mm)	8" (203 mm)	CB	1, 3
	ZLBS7010P-1	21 13/16" (554 mm)	22 1/8" (562 mm)	17" (432 mm)	20" (508 mm)	10" (254 mm)	CB	1, 3
●	ZALBS7505P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	5" (127 mm)	CB	1, 3
●	ZALBS7506P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	6" (152 mm)	CB	1, 3
	ZLBS7508P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1, 3
	ZLBS7510P-1	22" (559 mm)	17 1/4" (438 mm)	17" (432 mm)	15" (381 mm)	10" (254 mm)	CB	1, 3
●	ZALBS7305P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	5" (127 mm)	CB	1, 3
●	ZALBS7306P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	6" (152 mm)	CB	1, 3
	ZLBS7308P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	8" (203 mm)	CB	1, 3
	ZLBS7310P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17" (432 mm)	23" (584 mm)	10" (254 mm)	CB	1, 3
	ZLBS7312P-1	22 1/16" (560 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	12" (305 mm)	C	1, 3
	LBS7314P-1	22 9/16" (573 mm)	25 5/8" (651 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	14" (356 mm)	C	1, 3
●	ZALBS7805P-1	22" (559 mm)	30 1/8" (765 mm)	17" (432 mm)	28" (711 mm)	5" (127 mm)	CB	1, 3
●	ZALBS7806P-1	22" (559 mm)	30 1/8" (765 mm)	17" (432 mm)	28" (711 mm)	6" (152 mm)	CB	1, 3
	ZLBS7808P-1	22" (559 mm)	30 1/8" (765 mm)	17" (432 mm)	28" (711 mm)	8" (203 mm)	CB	1, 3
	LBS8014P-1	23 1/8" (587 mm)	22 1/8" (562 mm)	18" (457 mm)	20" (508 mm)	14" (356 mm)	C	1, 3

Double Topmount Sinks

51



cUPC®

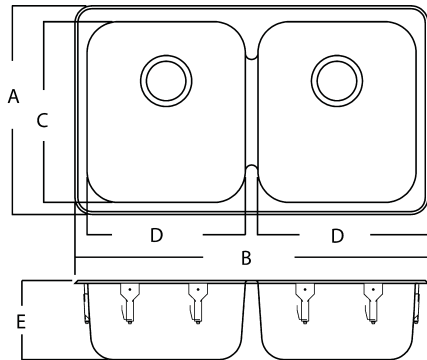

WITHOUT FAUCET LEDGE

WASTE OPTIONS

(Indicated in model number, eg. D1906-1)

The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

WASTE LOCATION

Center (C)

Center back (CB)

CHART NOTES


* Indicates model with Spillway® partition

● Indicates model is wheelchair accessible.

These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.

WITHOUT FAUCET LEDGE - 20 GAUGE, TYPE 304

Double compartment self rimming topmount sink less faucet ledge. 20 gauge (0.9 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fittings, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS			WASTE LOCATION	FAUCET HOLE OPTIONS
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)		
 D86 10-1	20 1/8" (511 mm)	35 1/4" (895 mm)	18" (457 mm)	16" (406 mm)	10" (254 mm)	C	N/A


WITHOUT FAUCET LEDGE - 20 GAUGE, TYPE 302

Double compartment self rimming topmount sink less faucet ledge. 20 gauge (0.9 mm), type 302 (CNS 18/8) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fittings, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.


OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS			WASTE LOCATION	FAUCET HOLE OPTIONS
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)		
● D1906-1	13 3/4" (349 mm)	21 11/16" (551 mm)	11 5/8" (295 mm)	9 1/4" (235 mm)	6" (152 mm)	C	N/A
D6408-1 *	18 7/16" (468 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	N/A

WITHOUT FAUCET LEDGE - 18 GAUGE, TYPE 304

Double compartment self rimming topmount sink less faucet ledge. 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fittings, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS			WASTE LOCATION	FAUCET HOLE OPTIONS
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)		
 D64 10PCB-1	18 1/8" (460 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	N/A
D08 14P-1	22" (559 mm)	39" (991 mm)	20" (508 mm)	18" (457 mm)	14" (356 mm)	C	N/A

Double Topmount Sinks

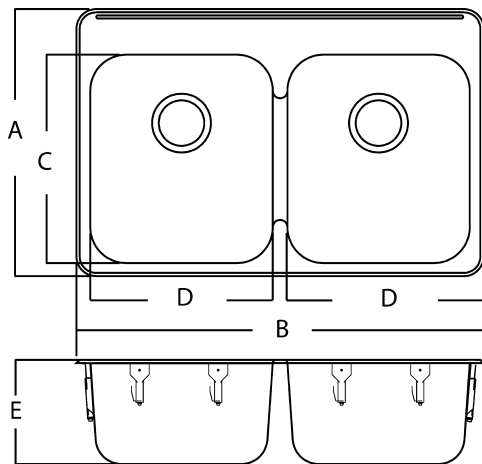

cUPC®

WITH FAUCET LEDGE - 20 GAUGE, TYPE 302

Double compartment self rimming topmount sink with faucet ledge. 20 gauge (0.9mm), type 302 (CNS 18/8) stainless steel. Exposed surfaces are #4 satin finished. Spillway® between bowls. Undercoated to reduce condensation and resonance. Includes waste fittings, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Includes waste assembly. Sink has Spillway® partition.

WASTE OPTIONS

(Indicated in model number, eg. ALBD6405-1)

The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece

WASTE LOCATION

Center back (CB)

Left rear (LR)

Right rear (RR)

FAUCET HOLE OPTIONS (STANDARD)

When ordering a model number, indicate which faucet hole option is required by adding the following to the end of the model number; (eg. ALBD6405-1/3)

/1, 1 hole, 1 1/2" diameter, centered over partition

/3, 3 hole, 8" spread, 1 1/2" diameter, centered over partition

CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. For custom drillings, order model as indicated in diagram and specify details of faucet holes required when ordering. Sinks with custom drillings are non-returnable.


CHART NOTES

* Indicates model with Spillway® partition

● Indicates model is wheelchair accessible.

These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.

OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS				
MODEL	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	WASTE LOCATION	FAUCET HOLE OPTIONS
● ZALBD6405-1 *	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	LR, RR	1, 3
ZLBD6407-1 *	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	7" (178 mm)	CB	1, 3
ZLBD6408-1 *	20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3
ZLBD6808-1 *	20 9/16" (522 mm)	39 3/16" (995 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	CB	1, 3
ZLBD7508-1 *	22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1, 3

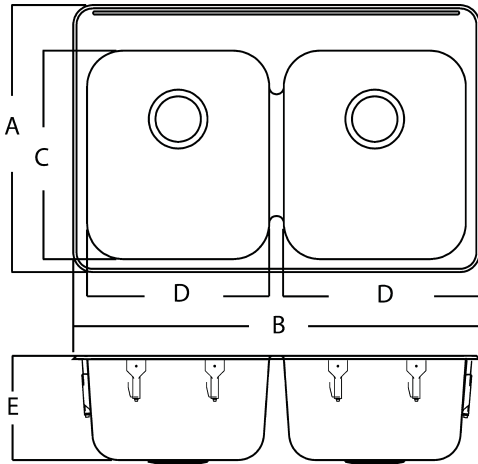

UPC®

CHART NOTES

- Indicates model is wheelchair accessible. These models meet ADA, ANSI A117.1. Check local codes to ensure compliance.
- * Indicates model with Spillway® partition

WITH FAUCET LEDGE - 18 GAUGE

Double compartment self rimming topmount sink with faucet ledge. 18 gauge (1.2mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fittings, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Includes waste assembly.

WASTE OPTIONS

(Indicated in model number, eg. ZLBD1308P-1)

- The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece
- The suffix (-2) indicates a 3 1/2" (89mm) crumb cup strainer, 1 1/2" (DN38) brass tailpiece, with integral overflow

WASTE LOCATION

Center (C)
Center back (CB)
Rear corner (RC)

FAUCET HOLE OPTIONS (STANDARD)

When ordering a model number, indicate which faucet hole option is required by adding the following to the end of the model number; (eg. ZLBD1308P-1/3)


- /1, 1 hole, 1 1/2" diameter, centered over partition
- /2, 2 hole, 1 1/2" diameter, 8" spread
- /3, 3 hole, 8" spread, 1 1/2" diameter, centered over partition

CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. For custom drillings, order model as indicated in diagram and specify details of faucet holes required when ordering. Sinks with custom drillings are non-returnable.

	MODEL	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			WASTE LOCATION	FAUCET HOLE OPTIONS
		A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)		
●	ZALBD1305P-1	15 5/16" (389 mm)	29 1/4" (743 mm)	11" (279 mm)	13" (330 mm)	5" (127 mm)	C	1, 3
●	ZALBD1306P-1	15 1/2" (394 mm)	29 1/2" (749 mm)	11" (279 mm)	13" (330 mm)	6" (152 mm)	C	1, 3
	ZLBD1308P-1	15 13/16" (402 mm)	29 1/4" (743 mm)	11" (279 mm)	13" (330 mm)	8" (203 mm)	C	1, 3
●	ZALBDC182605P-1	18 1/4" (464 mm)	26 5/8" (677 mm)	16" (406 mm)	14" (356 mm)	6" (153 mm)	CB	2
●	ZALBD4405P-1	* 18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	5" (127 mm)	CB	1, 3
●	ZALBD4406P-1	* 18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	6" (152 mm)	CB	1, 3
	ZLBD4408P-1	* 18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3
	ZLBD4410P-1	* 18 13/16" (478 mm)	31 1/4" (794 mm)	14" (356 mm)	14" (356 mm)	10" (254 mm)	CB	1, 3
●	ZALBD6405P-1	* 20 1/2" (521 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	5" (127 mm)	RC	1, 3
●	ZALBD6406P-1	* 20 1/2" (520 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	6" (152 mm)	CB	1, 3
	ZLBD6408P-1	* 20 1/2" (520 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	8" (203 mm)	CB	1, 3
	ZLBD6410PCB-1	20 13/16" (529 mm)	31 1/4" (794 mm)	16" (406 mm)	14" (356 mm)	10" (254 mm)	CB	1, 3
●	ZALBD7505P-1	* 22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	5" (127 mm)	CB	1, 3
●	ZALBD7506P-1	* 22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	6" (152 mm)	CB	1, 3
	ZLBD7508P-1	* 22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	8" (203 mm)	CB	1, 3
	ZLBD7510P-1	* 22" (559 mm)	33 1/4" (845 mm)	17" (432 mm)	15" (381 mm)	10" (254 mm)	CB	1, 3
	LBD7412P-1	22 1/16" (560 mm)	50 1/4" (1276 mm)	17 1/2" (445 mm)	23 1/2" (597 mm)	12" (305 mm)	C	1, 3
	LBD0814P-1	25" (635 mm)	39" (991 mm)	20" (508 mm)	18" (457 mm)	14" (356 mm)	C	1, 3

Triple Topmount Sinks

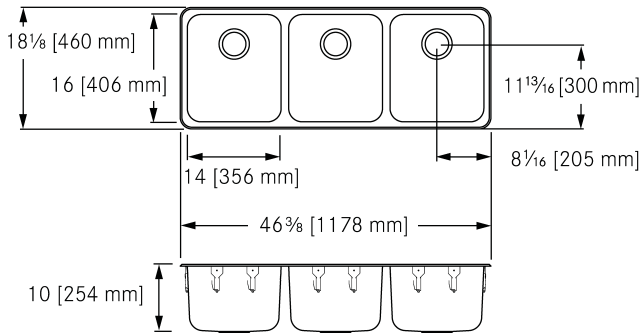

cUPC®


18 GAUGE, NO LEDGE

Triple compartment self rimming topmount sink less faucet ledge. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Complete with waste fittings, factory applied rim seal, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Center waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

18 1/8 x 46 3/8" Overall. 16 x 14 x 10" Bowl. (FB x LR x D).
460 x 1178 mm Overall. 406 x 356 x 254 mm Bowl. (FB x LR x D).

T6410PCB-1

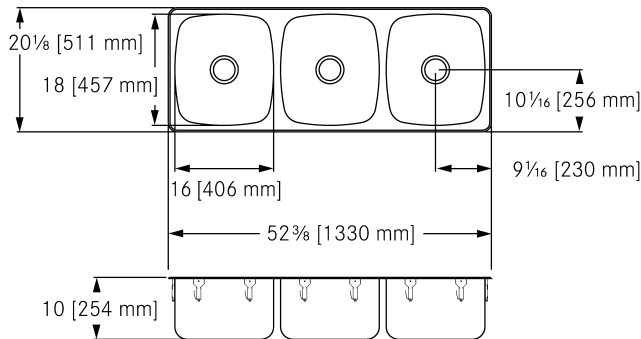

cUPC®


20 GAUGE, NO LEDGE, ROUNDED BOWL

Triple compartment self rimming topmount sink less faucet ledge. 20 gauge (0.9 mm), type 302 (CNS 18/8) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Complete with waste fittings, factory applied rim seal, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.


Center waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

20 1/8 x 52 3/8" Overall. 18 x 16 x 10" Bowl. (FB x LR x D).
511 x 1330 mm Overall. 457 x 406 x 254 mm Bowl. (FB x LR x D).


T8610-1

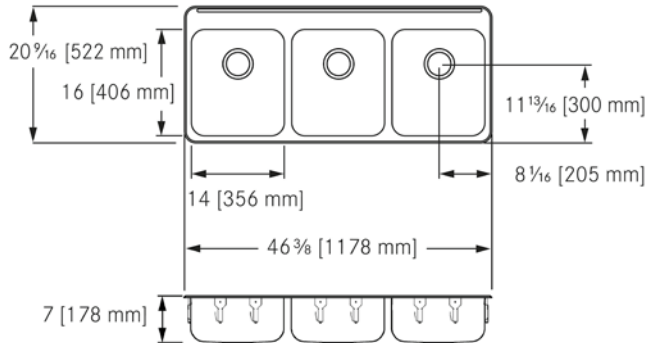

cUPC®

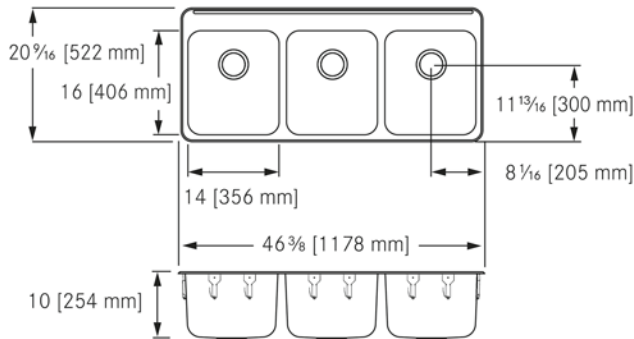

cUPC®

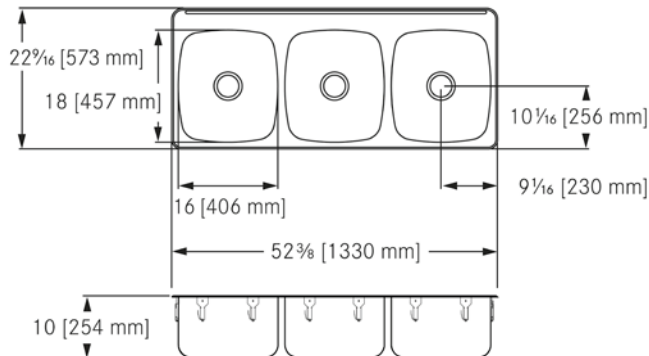

cUPC®

20 GAUGE, WITH LEDGE

Triple compartment self rimming topmount sink with faucet ledge. 20 gauge (0.9 mm), type 302 (CNS 18/8) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Complete with waste fittings, factory applied rim seal, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Center back waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

Model Options:

LBT6407CB-1/1, 1 faucet hole, 1 1/2" (89 mm) diameter
 LBT6407CB-1/3, 3 faucet holes, 8" spread, 1 1/2" diameter
 LBT6407CB-1, Custom (non-returnable)

20 9/16 x 46 3/8" Overall. 16 x 14 x 7" Bowl. (FB x LR x D).
 522 x 1178 mm Overall. 406 x 356 x 178 mm Bowl. (FB x LR x D).

LBT6407CB-1

18 GAUGE, WITH LEDGE

Triple compartment self rimming topmount sink with faucet ledge. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Complete with waste fittings, factory applied rim seal, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Center back waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

Model Options:

LBT6410PCB-1/1, 1 faucet hole, 1 1/2" diameter
 LBT6410PCB-1/3, 3 faucet holes, 8" spread, 1 1/2" diameter
 LBT6410PCB-1, Custom (non-returnable)

20 9/16 x 46 3/8" Overall. 16 x 14 x 10" Bowl. (FB x LR x D).
 522 x 1178 mm Overall. 406 x 356 x 254 mm Bowl. (FB x LR x D).

LBT6410PCB-1

18 GAUGE, WITH LEDGE, ROUNDED BOWL

Triple compartment self rimming topmount sink with faucet ledge. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Complete with waste fittings, factory applied rim seal, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Center waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece


Model Options:

LBT8610P-1/1, 1 faucet hole, 1 1/2" diameter
 LBT8610P-1/3, 3 faucet holes, 1 1/2" diameter, 8" spread
 LBT8610P-1, Custom (non-returnable)

22 9/16 x 52 3/8" Overall. 18 x 16 x 10" Bowl. (FB x LR x D).
 573 x 1330 mm Overall. 457 x 406 x 254 mm Bowl. (FB x LR x D).

LBT8610P-1

Undermount Sinks

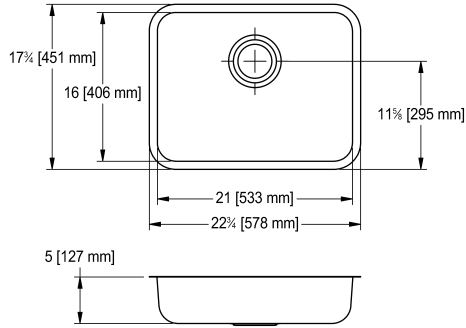


SINGLE, 16 X 21" BOWL

Single compartment undermount sink. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, cutout template, and installation hardware. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Wheelchair accessible: meets ADA (Americans with disabilities act guidelines) and ANSI A117.1. Check local codes to ensure compliance.

Center back waste location, 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

UCS6105P-1

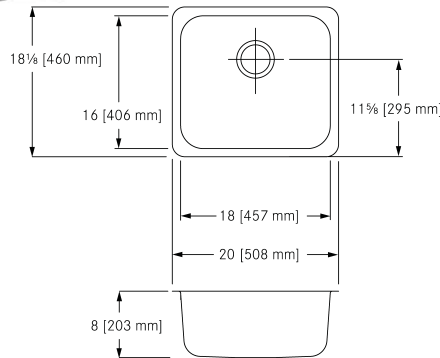


SINGLE, 16 X 18" BOWL

Single compartment undermount sink. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, cutout template, and installation hardware. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Center back waste location, 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

UCS6808P-1

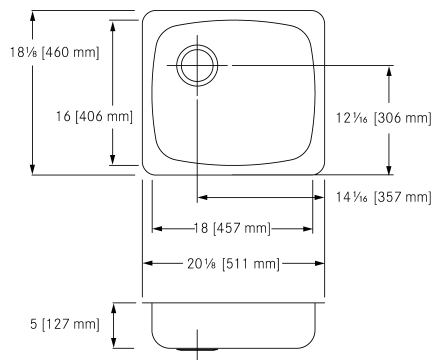

SINGLE, 16 X 18" BOWL, OFFSET WASTE


Single compartment undermount sink. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fitting, cutout template, and installation hardware. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Wheelchair accessible: meets ADA (Americans with disabilities act guidelines) and ANSI A117.1 (Accessible and usable buildings and facilities). Check local codes to ensure compliance.

Left rear waste location, 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

UCS6805P-1



cUPC®

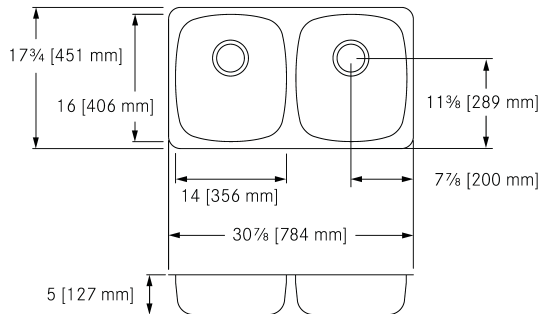**DOUBLE, 18 GAUGE, ROUNDED BOWL**


Double compartment undermount sink. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fittings, cutout template, and installation hardware. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Wheelchair accessible: meets ADA (Americans with disabilities act guidelines) and ANSI A117.1 (Accessible and usable buildings and facilities). Check local codes to ensure compliance.

Center back waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

UCD6405P-1

cUPC®


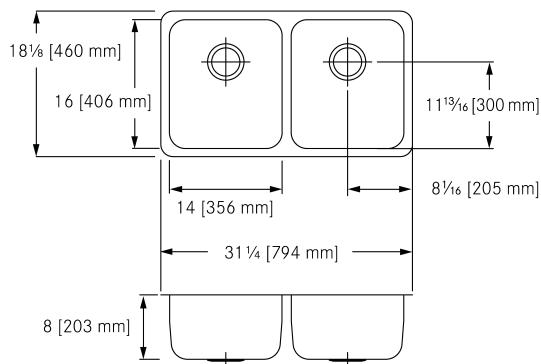
**DOUBLE, 18 GAUGE**

Double compartment undermount sink. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Includes waste fittings, cutout template, and Universal Installation System hardware. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Center back waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

UCD6408P-1



Hand Wash Basins



cUPC®

ANMW0010

ANMW0011



cUPC®

EXOS. MIRANIT MATERIAL SINGLE WASH BASIN

Exos single wash basin made of MIRANIT, resin-bonded mineral composite, with pore-free, smooth gelcoat high-polished surface (temperature-resistant up to 80°C), with storage surfaces and integral back panel with integrated brackets for wall mounting. It has a seamless molded bowl, no overflow and lowered faucet ledge with faucet hole 1 3/8 in. (35 mm) diameter. Mounting material and waste cover with InoxPlus coating included.

Wheelchair accessible: meets ADA (Americans with disabilities act guidelines), ANSI A117.1 (Accessible and usable buildings and facilities). Check local codes to ensure compliance.

Required waste (sold separately) 125GWK-MOD
Color: Alpine white


Wash basin dimensions (W x H x D)
23 5/8 x 4 15/16 x 19 11/16 in. (600 x 125 x 500 mm)
Bowl dimensions (W x H x D)
14 15/16 x 3 9/16 x 13 3/8 in. (380 x 90 x 340 mm)

ANMW0010

Wash basin dimensions (W x H x D)
35 7/16 x 4 15/16 x 19 11/16 in. (900 x 125 x 500 mm)
Bowl dimensions (W x H x D) (500 x 90 x 340 mm)

ANMW0011



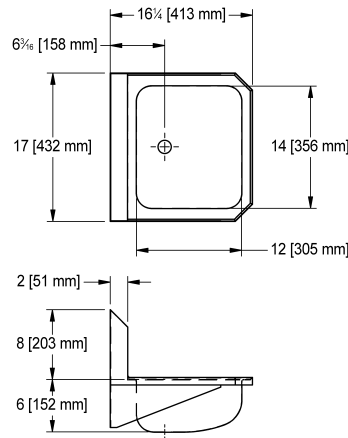

cUPC®

INSTITUTIONAL, 14 X 12" BOWL, FOR WALL MOUNT FAUCET

Wall hung basin. Center back waste location. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners. One piece wall hanger. Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Separate sink carrier is not required.


Model Options:

WHB1616-3/1 - 1 faucet hole 1 1/2" (38 mm)

WHB1616-3/2 - 2 faucet holes, 1 1/2" (38 mm) diameter, 4" (102 mm) centerset

WHB1616-3 - Custom (non-returnable), specify hole drilling

WHB1616-3

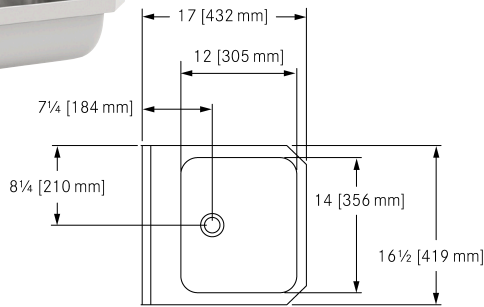

cUPC®

INSTITUTIONAL, 14 X 12" BOWL, DECK MOUNT

Wall hung basin. Center back waste location. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners. One piece wall hanger. Waste assembly included. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Separate sink carrier is not required.

1 1/2" (38 mm) duplex waste assembly with rubber stopper and 1 1/2" (DN40) brass tailpiece. Optional shroud: WT-RS

Model Options:

WHB1617-3/1, 1 faucet hole, 1 1/2" diameter


WHB1617-3/3, 3 faucet holes, 1 1/2" diameter, 4" centerset

WHB1617-3, Custom (non-returnable)

WHB1617-3

OPTIONAL SHROUD

WT-RS

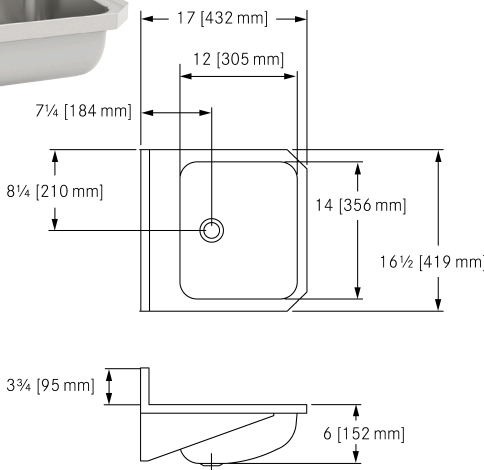

cUPC®

INSTITUTIONAL, 14 X 12" BOWL, DECK MOUNT, REAR OVERFLOW

Wall hung basin. Center back waste location. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners. One piece wall hanger. Waste assembly included. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Separate sink carrier is not required.

1 1/2" (38 mm) duplex waste assembly with rubber stopper and 1 1/2" (DN40) brass tailpiece, with overflow. Optional shroud: WT-RS.

Model Options:

WHB1617-6/1, 1 faucet hole, 1 1/2" diameter

WHB1617-6/3, 3 faucet holes, 1 1/2" diameter, 4" centerset


WHB1617-6, Custom (non-returnable)

WHB1617-6

OPTIONAL SHROUD

WT-RS

Hand Wash Basins

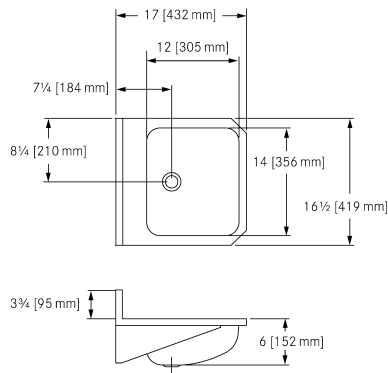

cUPC®

INSTITUTIONAL, 14 X 12" BOWL, DECK MOUNT, 1 1/4" WASTE NOT INCLUDED

Wall hung basin. Center back waste location. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners. One piece wall hanger. Waste assembly is not included. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Separate sink carrier is not required. Accepts 1 1/4" (32 mm) waste assembly. Optional shroud: WT-RS.


Model Options:

WHB1617-7/1, 1 faucet hole, 1 1/2" diameter

WHB1617-7/3, 3 faucet holes, 1 1/2" diameter, 4" centerset

WHB1617-7, Custom (non-returnable)

WHB1617-7

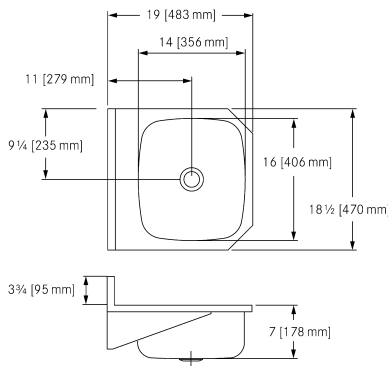

cUPC®

INSTITUTIONAL, 16 X 14" BOWL, DECK MOUNT, NO OVERFLOW

Wall hung basin. Center back waste location. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners. 16 gauge (1.5 mm) side wall brackets. One piece wall hanger. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Separate sink carrier is not required. 1 1/2" (38 mm) duplex waste assembly with rubber stopper and 1 1/2" (DN40) brass tailpiece. No overflow.


Model Options:

WHB1819-3/1, 1 faucet hole, 1 1/2" diameter

WHB1819-3/3, 3 faucet holes, 1 1/2" diameter, 4" centerset

WHB1819-3, Custom (non-returnable)

WHB1819-3

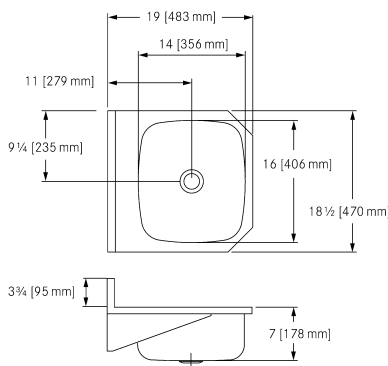

cUPC®

INSTITUTIONAL, 16 X 14" BOWL, DECK FAUCET, WITH OVERFLOW

Wall hung basin. Center back waste location. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners. 16 gauge (1.5 mm) side wall brackets. One piece wall hanger. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Separate sink carrier is not required. 1 1/2" (38 mm) duplex waste assembly with rubber stopper and 1 1/2" (DN40) brass tailpiece, with rear overflow.


Model Options:

WHB1819-6/1, 1 faucet hole, 1 1/2" diameter

WHB1819-6/3, 3 faucet holes, 1 1/2" diameter, 4" centerset

WHB1819-6, Custom (non-returnable)

WHB1819-6

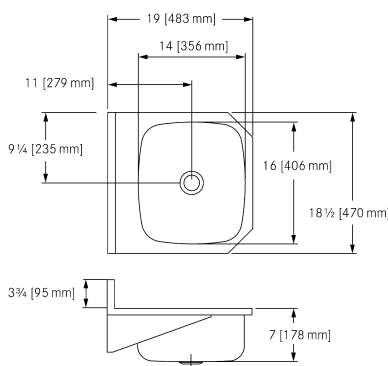

cUPC®

INSTITUTIONAL, 16 X 14" BOWL, DECK MOUNT, WASTE NOT INCLUDED

Wall hung basin. Center back waste location. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners. 16 gauge (1.5 mm) side wall brackets. One piece wall hanger. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Separate sink carrier is not required. Accepts 1 1/4" (32 mm) waste assembly (not included). No overflow.


Model Options:

WHB1819-7/1, 1 faucet hole, 1 1/2" diameter


WHB1819-7/3, 3 faucet holes, 1 1/2" diameter, 4" centerset

WHB1819-7, Custom (non-returnable)

WHB1819-7

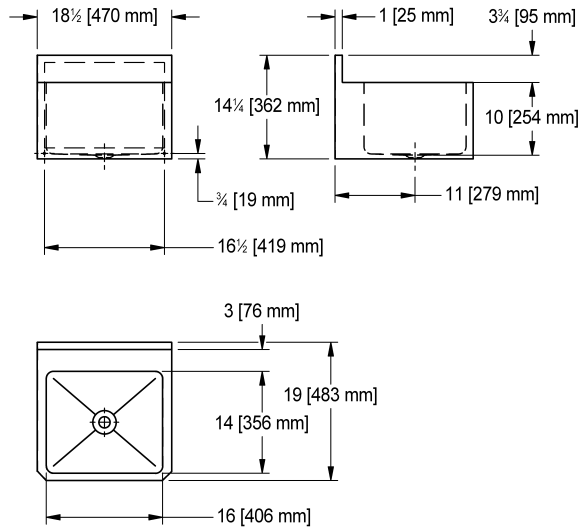

©UPC®

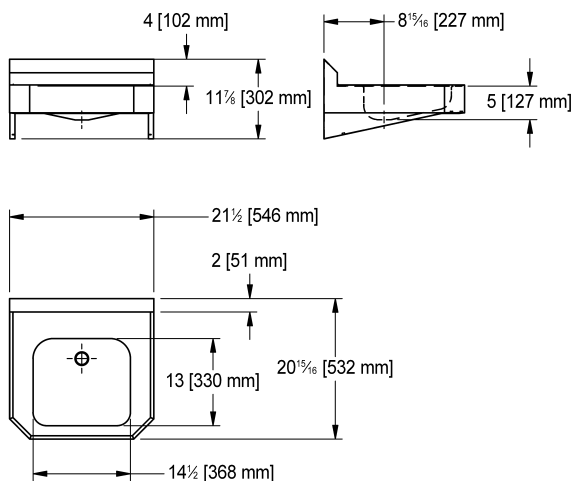

©UPC®

INSTITUTIONAL, WITH SHROUD, 16 X 14" BOWL, DECK MOUNT

Wall hung basin with shroud. Center waste location. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners. One piece wall hanger. Includes 1 1/2" (38 mm) duplex waste assembly with rubber stopper. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Separate sink carrier is not required.

Model Options:

WHBS181910-3/1, 1 faucet hole, 1 1/2" diameter

WHBS181910-3/3, 3 faucet holes, 1 1/2" diameter, 4" centerset

WHBS181910-3, custom / non-returnable.

WHBS181910-3

DESIGNER, SEMI-PUBLIC, 1 1/4" WASTE, NO OVERFLOW

Wall Hung Basin. Designed for either new installation or for replacement / retrofit onto select vitreous china wall carriers. Center back waste location. 18 gauge (1.2 mm) type 304 (CNS18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners. Grid strainer and one piece wall hanger bracket included. The edge is formed as an anti spill rim. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Available with optional shroud (WHB2221-RS) to cover the trap and water supplies. A third piece may be ordered for full under enclosure (WHB2221-UC). Model complies with ADA (Americans with disabilities act guidelines), ANSI A117.1. Check local codes to ensure compliance. 125GWK 1 1/4" waste kit included, no overflow.

Model Options:

WHB2221-7/1, 1 faucet hole 1 1/2" (38 mm) diameter

WHB2221-7/3, 3 faucet holes 1 1/4" (32 mm) diameter, 4" (102 mm) centerset



WHB2221-7, Custom (non-returnable), specify hole drilling

WHB2221-7

OPTIONAL SHROUD

WHB2221-RS

Hand Wash Basins

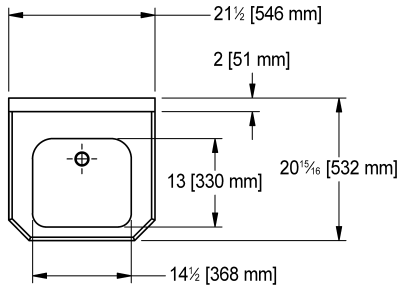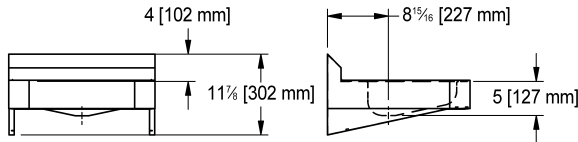

cUPC®

DESIGNER, SEMI-PUBLIC, 1 1/4" WASTE, WITH OVERFLOW

Wall Hung Basin. Designed for either new installation or for replacement / retrofit onto select vitreous china wall carriers. Center back waste location. 18 gauge (1.2 mm) type 304 (CNS18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners. Grid strainer and one piece wall hanger bracket included. The edge is formed as an anti spill rim. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Available with optional shroud (WHB2221-RS) to cover the trap and water supplies. A third piece may be ordered for full under enclosure (WHB2221-UC). Complies with ADA (Americans with disabilities act guidelines), ANSI A117.1. Check local codes to ensure compliance. 1 1/4" waste kit included (model 125GWK), with overflow. Model Options:

WHB2221-8/1, 1 faucet hole 1 1/2" (38 mm) diameter

WHB2221-8/3, 3 faucet holes 1 1/4" (32 mm) diameter, 4" (102 mm) centerset


WHB2221-8, Custom (non-returnable), specify hole drilling

WHB2221-8

OPTIONAL ACCESSORIES

WHB2221-RS

WHB2221-UC

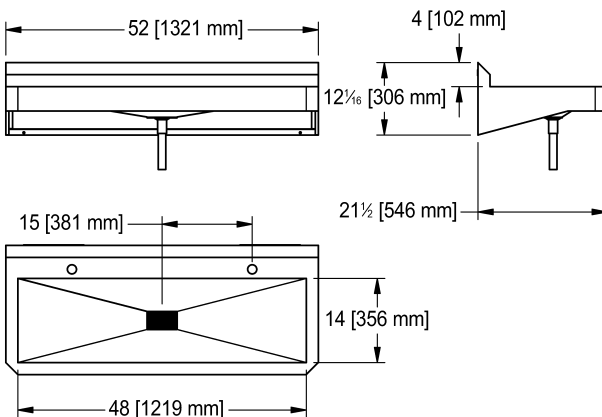

cUPC®

DESIGNER, 2 WASH PLACES, BASIN ANGLED TO CENTER

Designer double hand wash basin. 16 gauge 1.8 mm thick T304 (CNS 18/10) stainless steel. Exposed surfaces are polished to a #4 satin finish. 1 1/4" (DN 32) waste fitting included with vandal resistant laser cut pyramid waste cover. Basin is installed using wall brackets, no separate carrier is required. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Optional shroud WHB5222-RS. Wheelchair accessible: meets ADA (Americans with disabilities act guidelines), ANSI A117.1 (Accessible and usable buildings and facilities). Check local codes to ensure compliance.

Model Options:



WHB5222-7/2, Two single faucet holes 1 1/2" (38 mm) diameter.

WHB5222-7, Custom (non-returnable), specify hole drilling.

WHB5222-7

OPTIONAL SHROUD



WHB5222-RS



REMOVABLE SHROUD FOR SINGLE STATION BASIN

Removable shroud for WHB2221 series basin.
Made from 18 gauge (1.2 mm) stainless steel. The shroud is satin finished. Shroud measures 8" (203 mm) wide and extends 12.5" (317 mm) below the bottom of the basin.
11 1/4 x 8 x 14 7/8" Overall (FB x LR x H).

WHB2221-RS



REMOVABLE SHROUD FOR DUAL STATION BASIN

Removable shroud for WHB5222 series basin.
Made from 18 gauge (1.2 mm) stainless steel. Shroud measures 7" (178 mm) wide and extends 20 9/16" (522 mm) below the bottom of the basin. The shroud is satin finished.
21 5/16 x 7 x 20 5/8" Overall (FB x LR x H).


WHB5222-RS



COVER PLATE FOR WHB SERIES BASIN

Under cover for WHB2221-RS shroud.
21 x 21" Overall (LR x H).

WHB2221-UC


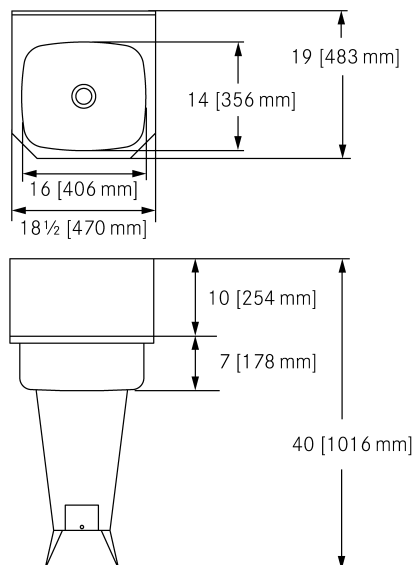


FREE STANDING, 18 GAUGE



Pedestal/wall hung basin with faucet ledge made from 18 gauge (1.2 mm) type 304 stainless steel. Polished satin finish. Radius covered bowl corners. Includes wall hanger bracket and 1 1/2" (38 mm) duplex waste assembly, location center. Please allow 4 weeks for delivery.

FWHB1819-3



Hand Wash Basins



UPC®



UPC®



UPC®

CORNER WALL MOUNT DESIGNER BASIN, 1 1/4" WASTE NOT INCLUDED

Single compartment corner wall mount wash basin with faucet ledge. Center waste location. 19 gauge (1.0 mm) 18/10 stainless steel. Exposed surfaces are brushed finish. Includes installation kit. Accepts 1 1/4 in. (32 mm) waste (not included).

12 3/16" x 12 3/16" (Overall D x W).

6 1/8" x 11 7/16" x 4 3/4" (Bowl D x W x H).

Model Options:

WT310E-7/1, 1 faucet hole, 1 3/8 in. (35 mm) diameter

WT310E-7, Custom (non returnable), specify hole drilling.

WT310E-7

OPTIONAL WASTE FITTING

125GWK

DESIGNER BASIN, 1 1/4" WASTE NOT INCLUDED, NO OVERFLOW

Single wash basin for wall mounting, stainless steel, surface satin finished, material thickness 1 mm (19 gauge), seamless welded bowl with diameter 340x300x140 mm, rectangular shape, 120 mm tap ledge, front panel with 45° corner edges, pre-welded mounting brackets, including screws and dowels. Optional shroud also available: WT-RS.

Custom hole drilling, specify when ordering, no overflow, accepts 1 1/4" (32 mm) waste - not included.

17 13/16" x 15 3/4" (Overall D x W).

12" x 13 3/8" x 5 9/16" (Bowl D x W x H).

Model Options:

WT400C-7/1, 1 faucet hole 1 3/8" (35 mm)

WT400C-7, Custom (non returnable), specify hole drilling

WT400C-7

OPTIONAL ACCESSORIES

WT-RS, 125GWK

DESIGNER BASIN, 1 1/4" WASTE NOT INCLUDED, WITH OVERFLOW

Single wash basin for wall mounting, stainless steel, surface satin finished, material thickness 1 mm (19 gauge), seamless welded bowl with diameter 340x300x140 mm, rectangular shape, 120 mm tap ledge, front panel with 45° corner edges, prewelded mounting brackets, including screws and dowels. Optional shroud also available: WT-RS.

With overflow, accepts 1 1/4" (32 mm) waste - not included.

17 13/16" x 15 3/4" (Overall D x W).

12" x 13 3/8" x 5 9/16" (Bowl D x W x H).

Model Options:


WT400C-8/1, 1 faucet hole 1 3/8" (35 mm)

WT400C-8, Custom (non returnable), specify hole drilling


WT400C-8

OPTIONAL ACCESSORY


WT-RS

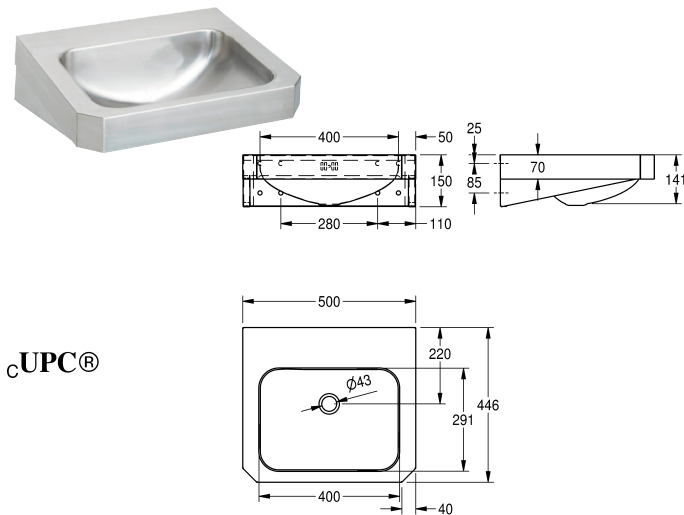

cUPC®

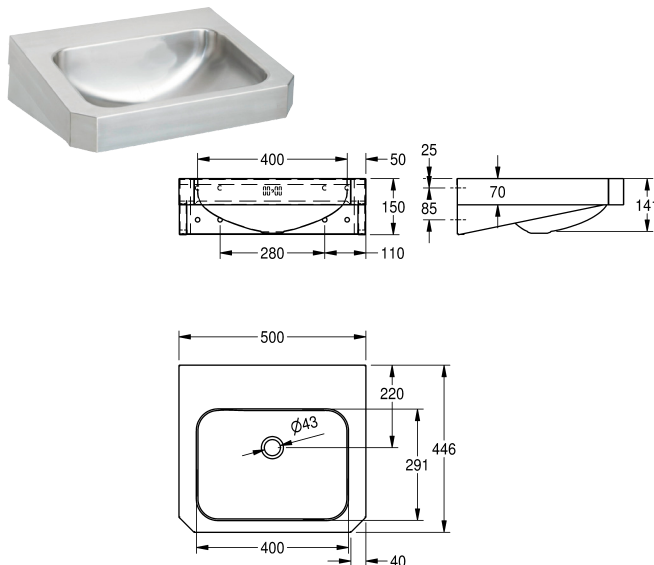

cUPC®

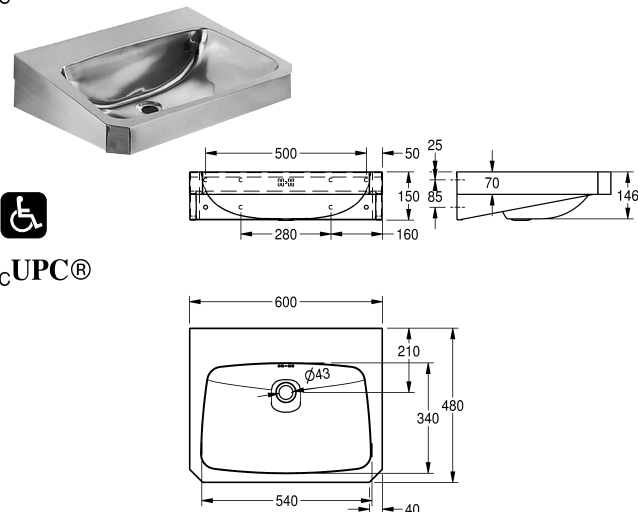

cUPC®

DESIGNER BASIN, 1 1/4" WASTE NOT INCLUDED, NO OVERFLOW

Single wash basin for wall mounting, stainless steel, surface satin finished, material thickness 1 mm (19 gauge), seamless welded bowl with diameter 400x300x135 mm, rectangular shape, 105 mm tap ledge, front panel with 45° corner edges, prewelded mounting brackets, mounting conform EN 31, including screws and dowels. Optional shroud also available: WT-RS.

No overflow, accepts 1 1/4" (32 mm) waste - not included.

17 9/16" x 19 11/16" (Overall D x W).

11 7/16" x 15 3/4" x 5 9/16" (Bowl D x W x H).

Model Options:

WT500C-7, Custom (non returnable), specify hole drilling

WT500C-7/1, 1 faucet hole 1 3/8" (35 mm)

WT500C-7

OPTIONAL ACCESSORIES

WT-RS, 125GWK

DESIGNER BASIN, 1 1/4" WASTE NOT INCLUDED, WITH OVERFLOW

Single wash basin for wall mounting, stainless steel, surface satin finished, material thickness 1 mm (19 gauge), seamless welded bowl with diameter 400x300x135 mm, rectangular shape, 105 mm tap ledge, front panel with 45° corner edges, prewelded mounting brackets, mounting conform EN 31, including screws and dowels. Optional shroud also available: WT-RS.

With overflow, accepts 1 1/4" (32 mm) waste - not included.

17 9/16" x 19 11/16" (Overall D x W).

11 7/16" x 15 3/4" x 5 9/16" (Bowl D x W x H).

Model Options:

WT500C-8, Custom (non returnable), specify hole drilling

WT500C-8/1, 1 faucet hole 1 3/8" (35 mm).

WT500C-8

OPTIONAL ACCESSORY

WT-RS

DESIGNER BASIN, 1 1/4" WASTE NOT INCLUDED, NO OVERFLOW

Single wash basin for wall mounting, stainless steel, surface satin finished, material thickness 1 mm (19 gauge), seamless welded bowl with diameter 550x350x145 mm, rectangular shape, 90 mm tap ledge, front panel with 45° corner edges, prewelded mounting brackets, including screws and dowels. Optional shroud also available: WT-RS.

No overflow, accepts 1 1/4" (32 mm) waste - not included.

18 7/8" x 23 5/8" (Overall D x W).

13 3/8" x 21 1/4" x 5 3/4" (Bowl D x W x H).

Model Options:

WT600C-7, Custom (non returnable), specify hole drilling

WT600C-7/1, 1 faucet hole 1 3/8" (35 mm)

WT600C-7



OPTIONAL ACCESSORIES

WT-RS, 125GWK

Hand Wash Basins



cUPC®

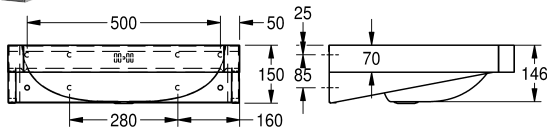

DESIGNER BASIN, 1 1/4" WASTE NOT INCLUDED, WITH OVERFLOW

Single wash basin for wall mounting, stainless steel, surface satin finished, material thickness 1 mm (19 gauge), seamless welded bowl with diameter 550x350x145 mm, rectangular shape, 90 mm tap ledge, front panel with 45° corner edges, prewelded mounting brackets, including screws and dowels.

Optional shroud also available: WT-RS.

Rear overflow for wheelchair accessibility, accepts 1 1/4" (32 mm) waste - not included.

18 7/8" x 23 5/8" (Overall D x W).

13 3/8" x 21 1/4" x 5 3/4" (Bowl D x W x H).

Model Options:


WT600C-8, Custom (non returnable), specify hole drilling

WT600C-8/1, 1 faucet hole 1 3/8" (35 mm)

WT600C-8

OPTIONAL ACCESSORY

WT-RS

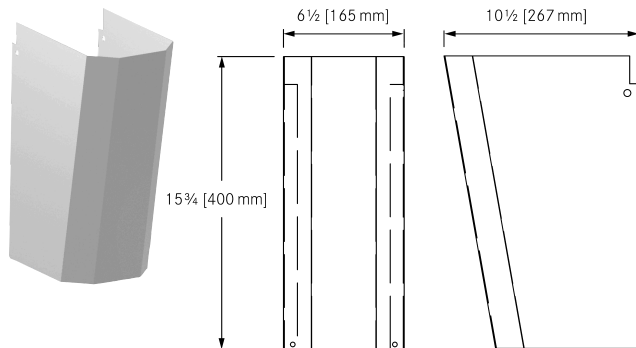

WALL SHROUD, 18 GAUGE


Trap cover manufactured from 18 gauge, type 304 stainless steel.

Exposed surfaces are satin finished.

For wall mount installation of wash basin models WT400C, WT500C, WT600C and WHB1617 series.

10 1/2 x 6 1/2 x 15 3/4" Overall (FB x LR x H)

WT-RS

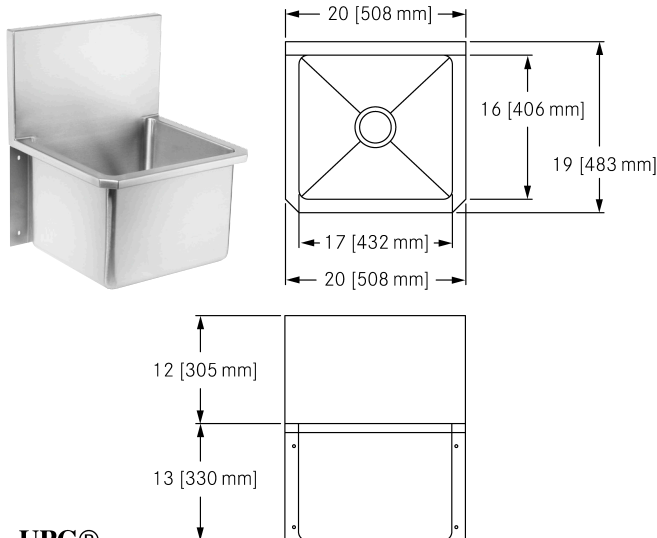

INSTITUTIONAL, 14 GAUGE

Wall service sink. Center waste location. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery.

19 x 20" Overall (FB x LR x D)

16 x 17 x 13" Bowl (FB x LR x D)

Model Options:

WSS6713/2, 2 faucet holes, 1 1/4" diameter, 8" spread



WSS6713, Custom, non-returnable

WSS6713



cUPC®



cUPC®

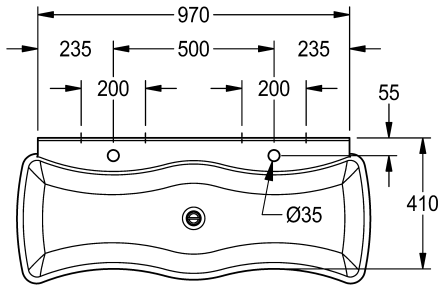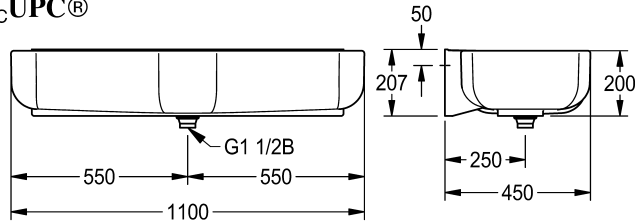

cUPC®

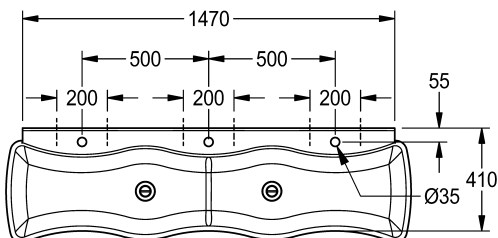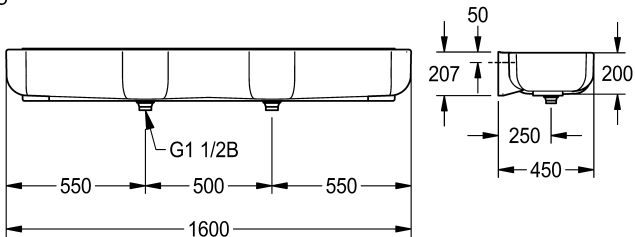**WASHINO TROUGH SINK - 2 WASH PLACES**

WASHINO trough sink is made of MIRANIT resin-bonded mineral material, with a smooth, pore-free surface (temperature-resistant up to 80°C). Alpine white color. Wave-shaped basins with reduced extension to increase accessibility to the faucet, large outer radii of basins to minimize risk of injury, large inner radii facilitate easy cleaning. Faucet deck with a faucet hole 1 3/8" (35 mm) for each wash place. No custom hole drilling for this range.

1 1/2" waste with 4 3/4" overflow valve are implemented as a standpipe. Integral back panel for mounting.

Required waste fitting, model #100 (sold separately).

2 wash places

17 3/4 x 43 3/8 x 9 7/16" Overall F-B x L-R x D

7 7/8" bowl depth

SANW200

OPTIONAL ACCESSORY

100 WASTE FITTING

WASHINO TROUGH SINK - 3 WASH PLACES

WASHINO trough made of MIRANIT resin-bonded mineral material, with a smooth, pore-free surface (temperature-resistant up to 80°C). Alpine white color. Wave-shaped basins with reduced extension to increase accessibility to the faucet, large outer radii of basins helps minimize risk of injury, large inner radii facilitate easy cleaning. Faucet deck with 3 faucet holes, 1 3/8" (35 mm).

1 1/2" waste with 4 3/4" overflow valve are implemented as a standpipe. Integral back panel for mounting.

Required waste fitting, model #100 (sold separately).

3 wash places

17 3/4 x 63 x 9 7/16" Overall F-B x L-R x D

7 7/8" bowl depth

SANW215



OPTIONAL ACCESSORY

100 WASTE FITTING


Hand Wash Basins



cUPC®

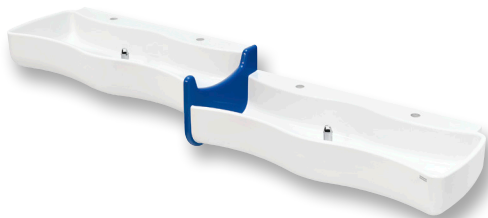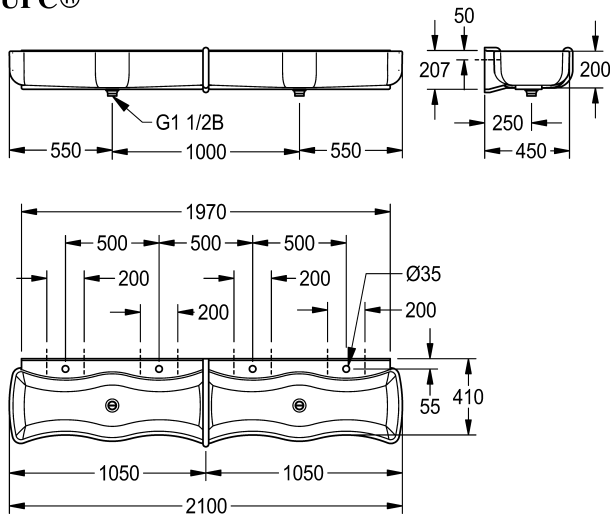

cUPC®

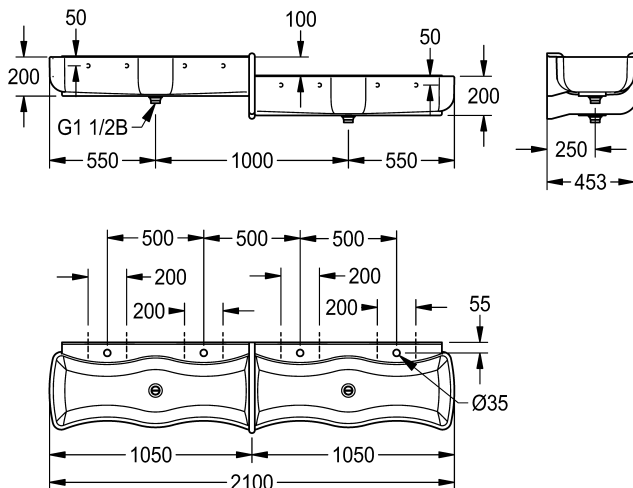

WASHINO TROUGH SINK - 4 WASH PLACES

WASHINO trough made of MIRANIT resin-bonded mineral material, with a smooth, pore-free surface (temperature-resistant up to 80°C). Alpine white color. Wave-shaped basins with reduced extension offers increased accessibility to the faucet, large outer radii of basins helps minimize risk of injury, large inner radii facilitates easy cleaning. Faucet deck with 2 faucet holes, 1 3/8" (35 mm) for each wash place. 1 1/2" waste with 4 3/4" overflow valve are implemented as a standpipe. Integral back panel for mounting. Required waste fitting, model #100 (sold separately).

4 wash places
18 1/2 x 82 5/8 x 9 7/16" Overall F-B x L-R x D
7 7/8" bowl depth

SANW205

OPTIONAL ACCESSORY

100 WASTE FITTING

WASHINO TROUGH SINK, LEFT BASIN HIGH

WASHINO trough made of MIRANIT resin-bonded mineral material, with a smooth, pore-free surface (temperature-resistant up to 80°C). Alpine white color. With 4 wash places (2 wash places with a height difference of 100 mm), Wave-shaped basins with reduced extension offers increased accessibility to the faucet, large outer radii of basins helps minimize risk of injury, large inner radii facilitates easy cleaning. Faucet deck with 4 faucet holes, 1 3/8" (35 mm). Integrated divider with overflow function made of MIRANIT, blue color (RAL 5002). 1 1/2" waste with 4 3/4" overflow valve are implemented as a standpipe for 2 of the 4 washing stations. Integral back panel for mounting. Mounting instructions included. Required waste fitting, model #100 (sold separately).




Version with basin left above/right below
18 1/2 x 82 5/8 x 13 3/8" Overall F-B x L-R x D
Bowl depth 7 7/8"

SANW211

OPTIONAL ACCESSORY

100 WASTE FITTING

cUPC®

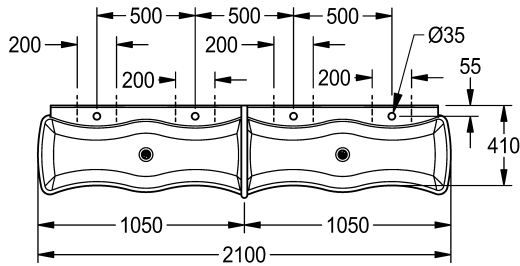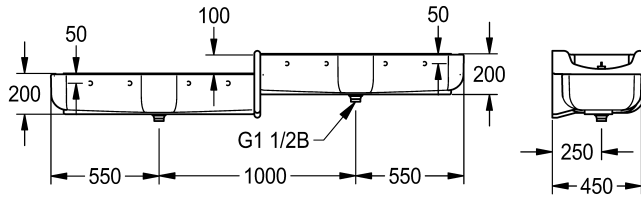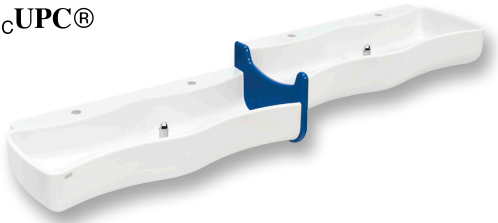**WASHINO TROUGH SINK, RIGHT BASIN HIGH**

WASHINO trough made of MIRANIT resin-bonded mineral material, with a smooth, pore-free surface (temperature-resistant up to 80°C). Alpine white color. With 4 wash places (2 wash places with a height difference of 100 mm). Wave-shaped basins with reduced extension offers increased accessibility to the faucet. Large outer radii of basins helps minimize risk of injury while large inner radii facilitates easy cleaning. Faucet deck with 4 faucet holes, 1 3/8" (35 mm). Integrated divider with overflow function made of MIRANIT, blue color (RAL 5002). 1 1/2" waste with 4 3/4" overflow valve are implemented as a standpipe for 2 of the 4 wash places. Integral back panel for mounting. Required waste fitting, model #100 (sold separately).


Version with basin right above/left below
 18 1/2 x 82 5/8 x 13 3/8" Overall F-B x L-R x D
 Bowl depth 7 7/8"

SANW212**OPTIONAL ACCESSORY****100 WASTE FITTING**

Utility Sinks



cUPC®

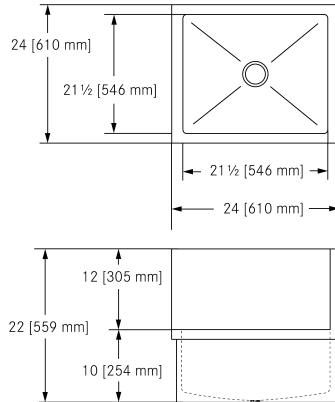

MOP SINK, SQUARE DESIGN


Mop service sink. Center waste location. 16 gauge (1.5 mm), type 316 (EN1.4401 17/12/2) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Integral corner splashguard. Can be installed in either left or right corners. Undercoated to reduce condensation and resonance. One piece wall hangers. Includes 2" IPS grid shower waste. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery.

FSS222210/316-1



cUPC®




MOP SINK, ANGULAR CONSTRUCTION, SPLASH


Mop service sink. Center waste location. 16 gauge (1.5 mm), type 316 (EN1.4401 17/12/2) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Integral splashguard back and side. Can be installed in either left or right corners. Undercoated to reduce condensation and resonance. One piece wall hangers. Includes 2" IPS grid shower drain. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery.

FSS2210/316-1



cUPC®



MOP SINK, LOW ACCESS AT CENTER


Mop service sink. Center waste location. 16 gauge (1.5 mm), type 316 (EN1.4401 17/12/2) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Undercoated to reduce condensation and resonance. One piece wall hangers. Can be installed in either left or right corners. Comes with integral back splash and side splash. Drop front feature to facilitate easy drainage of power driven floor maintenance equipment. Includes 2" IPS grid shower drain. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery.

FSS02210/316-1



cUPC®





MOP SINK, RECTANGULAR CONSTRUCTION, LONG SPLASHGUARD ON RIGHT

Mop service sink. Center waste location. 16 gauge (1.5 mm), type 316 (EN1.4401 17/12/2) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Integral splashguard left and rear sides. Undercoated to reduce condensation and resonance. One piece wall hangers. Includes 2" IPS grid shower waste. Certified to ASME A112.19.3-2008 / CSA B45.4-08.


Please allow 4 weeks for delivery.

FSSL223410/316-1

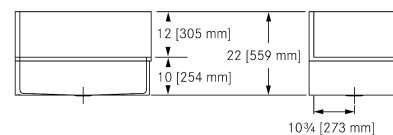




cUPC®




MOP SINK, RECTANGULAR CONSTRUCTION, LONG SPLASHGUARD ON LEFT

Mop service sink. Center waste location. 16 gauge (1.5 mm), type 316 (EN1.4401 17/12/2) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Integral splashguard right and rear sides. Undercoated to reduce condensation and resonance. One piece wall hangers. Includes 2" IPS grid shower drain. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery.

FSSR223410/316-1





cUPC®




MOP SINK, RECTANGULAR CONSTRUCTION, LONG SPLASHGUARD ON RIGHT, LOW ACCESS

Mop service sink. Center waste location. 16 gauge (1.5 mm), type 316 (EN1.4401 17/12/2) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Integral splashguard left and rear sides. Drop front feature facilitates easy drainage of power driven floor maintenance equipment. Undercoated to reduce condensation and resonance. One piece wall hangers. Includes 2" IPS grid shower drain. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery.

FSSOL223410/316-1




cUPC®




MOP SINK, RECTANGULAR CONSTRUCTION, LONG SPLASHGUARD ON LEFT, LOW ACCESS

Mop service sink. Center waste location. 16 gauge (1.5 mm), type 316 (EN1.4401 17/12/2) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Integral splashguard left and rear sides. Drop front feature facilitates easy drainage of power driven floor maintenance equipment. Undercoated to reduce condensation and resonance. One piece wall hangers. Includes 2" IPS grid shower drain. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery.

FSSOR223410/316-1



cUPC®

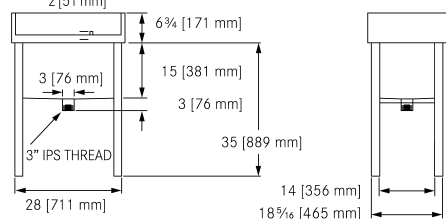

SEWAGE SAMPLING, SINGLE


Single compartment sewage sampling sink without drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Anti-splash rim. Stainless steel 3/4" (19 mm) O.D. flushing tube with 1/2" (12.7 mm) NPS connection. 3" x 3" (76 mm x 76 mm) threaded waste outlet. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery.

SSS1827

Utility Sinks



cUPC®

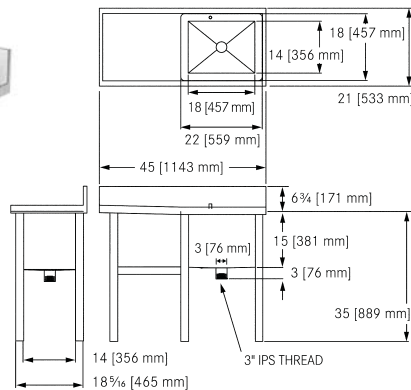

SEWAGE SAMPLING, LEFT DRAINBOARD


Single compartment sewage sampling sink with drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Anti-splash rim. Stainless steel 3/4" (19 mm) O.D. flushing tube with 1/2" (12.7 mm) NPS connection. 3" x 3" (76 mm x 76 mm) threaded waste outlet. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery.

Left drainboard.

SSS1827SDSL



cUPC®

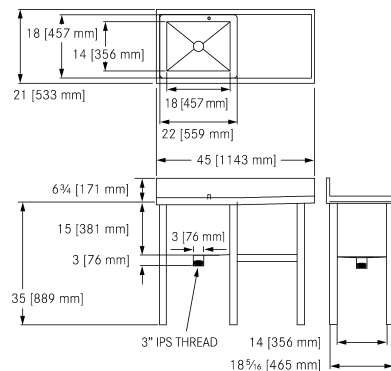

SEWAGE SAMPLING, RIGHT DRAINBOARD


Single compartment sewage sampling sink with drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Anti-splash rim. Stainless steel 3/4" (19 mm) O.D. flushing tube with 1/2" (12.7 mm) NPS connection. 3" x 3" (76 mm x 76 mm) threaded waste outlet. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery.

Right drainboard.

SSS1827SDSR



cUPC®

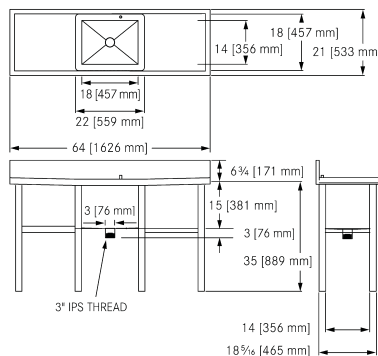

SEWAGE SAMPLING, DRAINBOARDS LEFT AND RIGHT


Single compartment sewage sampling sink left and right drainboard. 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Radius coved bowl corners. Anti-splash rim. Stainless steel 3/4" (19 mm) O.D. flushing tube with 1/2" (12.7 mm) NPS connection. 3" x 3" (76 mm x 76 mm) threaded waste outlet. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery.

Double drainboards.

SSS1827DDS



cUPC®

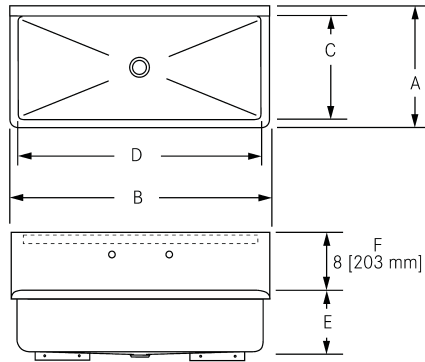**WALL TROUGH SINK - 16 GAUGE, 18" FRONT TO BACK**

Single compartment wash trough. Center waste location. 16 gauge (1.5mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners and rolled radius rim. 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery.
1 1/2" (38mm) waste option available as custom request.

BACKSPLASH
8" (200 mm)


FAUCET HOLE OPTIONS (STANDARD)

These models are not returnable once drilled to your specification. Faucet hole locations should be indicated relative to the sink orientation as shown in the drawings. A sketch is recommended.

MODEL	OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS		
	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	F BACKSPLASH
WTS36-1	18" (457 mm)	36" (914 mm)	14 3/4" (375 mm)	33 1/2" (851 mm)	8" (203 mm)	8" (203 mm)
WTS48-1	18" (457 mm)	48" (1219 mm)	14 3/4" (375 mm)	44 1/2" (1130 mm)	8" (203 mm)	8" (203 mm)
WTS60-1	18" (457 mm)	60" (1524 mm)	14 3/4" (375 mm)	56 1/2" (1435 mm)	8" (203 mm)	8" (203 mm)
WTS72-1	18" (457 mm)	72" (1829 mm)	14 3/4" (375 mm)	68 1/2" (1740 mm)	8" (203 mm)	8" (203 mm)



cUPC®

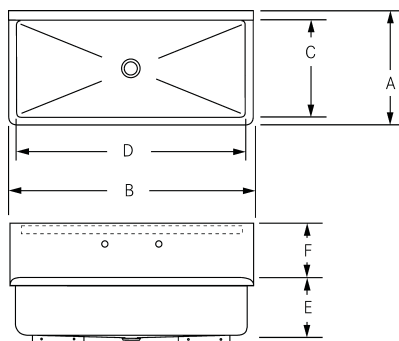**WALL TROUGH SINK - 14 GAUGE, 20" FRONT TO BACK**

Single compartment wash trough. Center waste location. 14 gauge (2.0mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Radius coved bowl corners and rolled radius rim. 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery.

FAUCET HOLE OPTIONS (STANDARD)


These models are not returnable once drilled to your specification. Faucet hole locations should be indicated relative to the sink orientation as shown in the catalog drawings. A sketch is recommended.

MODEL	OVERALL DIMENSIONS			SINK COMPARTMENT DIMENSIONS		
	A (FRONT-BACK)	B (LEFT-RIGHT)	C (FRONT-BACK)	D (LEFT-RIGHT)	E (DEPTH)	F BACKSPLASH
WTS2025-1	20" (508 mm)	25" (635 mm)	16 1/2" (419 mm)	22" (559 mm)	10 1/2" (267 mm)	6" (152 mm)
WTS2031-1	20" (508 mm)	31" (787 mm)	16 1/2" (419 mm)	28" (711 mm)	10 1/2" (267 mm)	6" (152 mm)
WTS2036-1	20" (508 mm)	36" (914 mm)	16 1/2" (419 mm)	33" (838 mm)	8" (203 mm)	10" (254 mm)
WTS2048-1	20" (508 mm)	48" (1219 mm)	16 1/2" (419 mm)	45" (1143 mm)	8" (203 mm)	10" (254 mm)
WTS2060-1	20" (508 mm)	60" (1524 mm)	16 1/2" (419 mm)	57" (1448 mm)	8" (203 mm)	10" (254 mm)
WTS2072-1	20" (508 mm)	72" (1829 mm)	16 1/2" (419 mm)	69" (1753 mm)	8" (203 mm)	10" (254 mm)
WTS2096-1	20" (508 mm)	96" (2438 mm)	16 1/2" (419 mm)	93" (2362 mm)	8" (203 mm)	10" (254 mm)


Drainboard Sinks




cUPC®

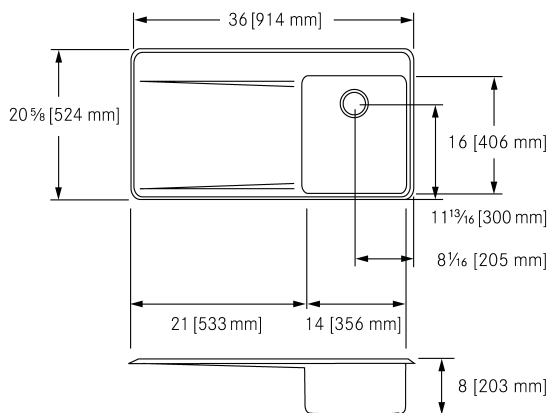

cUPC®

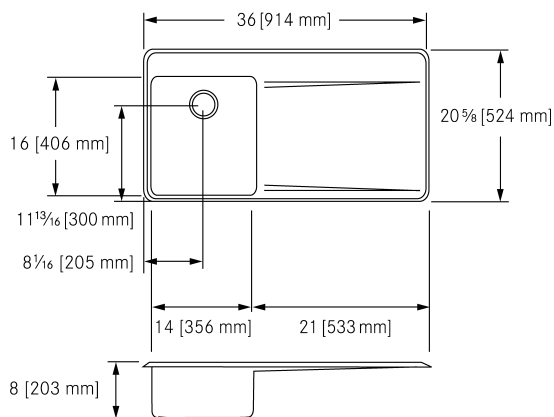

cUPC®

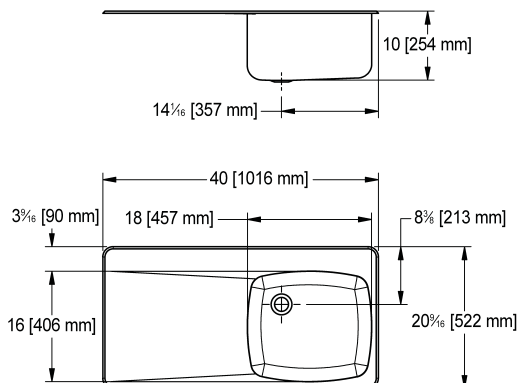

18 GAUGE, DRAINBOARD LEFT

Single compartment self rimming topmount sink with faucet ledge and drainboard. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery. Drainboard is located to the left of sink bowl and is sloped for drainage.

Center back waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

Model Options:

LBSDL6408P-1/1, 1 faucet hole, 1 1/2" diameter
LBSDL6408P-1/3, 3 faucet holes, 1 1/2" diameter, 8 inch spread
LBSDL6408P-1, Custom (non-returnable)

LBSDL6408P-1

18 GAUGE, DRAINBOARD RIGHT

Single compartment self rimming topmount sink with faucet ledge and drainboard. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery. Drainboard is located to the right of sink bowl and is sloped for drainage.

Center back waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

Model Options:

LBSDBR6408P-1/1, 1 faucet hole, 1 1/2" diameter
LBSDBR6408P-1/3, 3 faucet holes, 1 1/2" diameter, 8" spread
LBSDBR6408P-1, Custom (non-returnable)

LBSDBR6408P-1

18 GAUGE, DRAINBOARD LEFT, ROUNDED BOWL

Single compartment self rimming topmount sink with faucet ledge and drainboard. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery. Drainboard is located to the left of sink bowl and is sloped for drainage.

Center waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.



Model Options:

LBSDL6810P-1/1, 1 faucet hole, 1 1/2" diameter
LBSDL6810P-1/3, 3 faucet holes, 1 1/2" diameter, 8" spread
LBSDL6810P-1, Custom (non-returnable)


LBSDL6810P-1




cUPC®

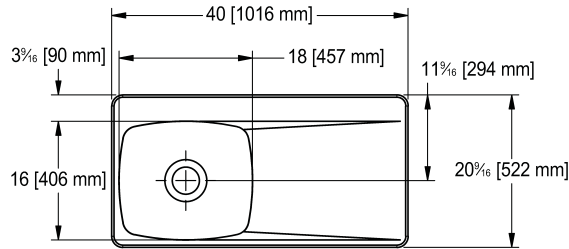

cUPC®

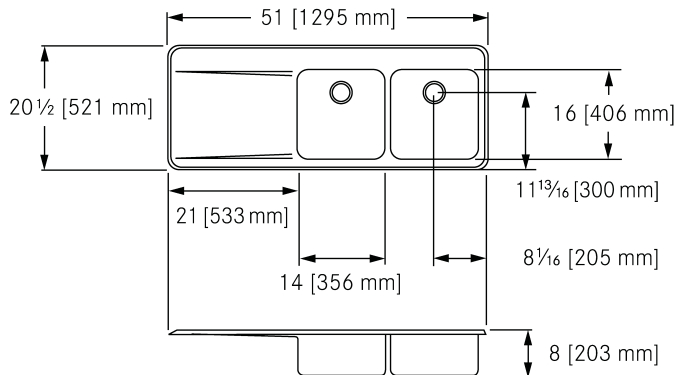

cUPC®

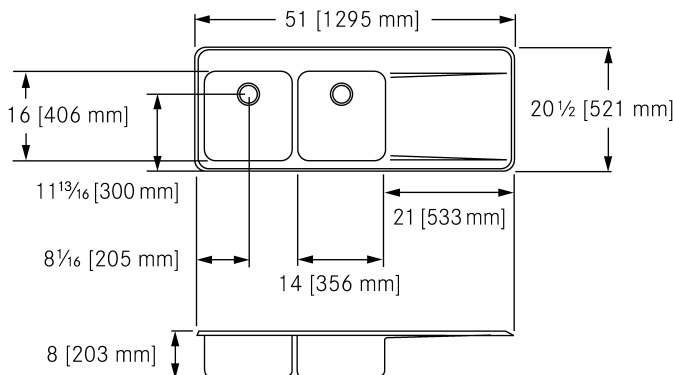**18 GAUGE, DRAINBOARD RIGHT, ROUNDED BOWL**

Single compartment self rimming topmount sink with faucet ledge and drainboard. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery. Drainboard is located to the right of sink bowl and is sloped for drainage.

Center waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

Model Options:

LBSDBR6810P-1/1, 1 faucet hole, 1 1/2" diameter
LBSDBR6810P-1/3, 3 faucet holes, 1 1/2" diameter, 8" spread
LBSDBR6810P-1, Custom (non-returnable)

LBSDBR6810P-1**18 GAUGE, DRAINBOARD LEFT**

Double compartment self rimming topmount sink with faucet ledge and drainboard. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Waste fittings included. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Drainboard is located to the left of sink bowls and is sloped for drainage.

Center rear waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

Model Options:

LBDDBL6408P-1/1, 1 faucet hole, 1 1/2" diameter
LBDDBL6408P-1/3, 3 faucet holes, 1 1/2" diameter, 8" center spread
LBDDBL6408P-1, Custom (non-returnable)

LBDDBL6408P-1**18 GAUGE, DRAINBOARD RIGHT**

Double compartment self rimming topmount sink with faucet ledge and drainboard. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Waste fittings included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Drainboard is located to the right of sink bowls and is sloped for drainage.

Center rear waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

Model Options:

LBDDBR6408P-1/1, 1 faucet hole, 1 1/2" diameter
LBDDBR6408P-1/3, 3 faucet holes, 1 1/2" diameter, 8" center spread
LBDDBR6408P-1, Custom (non-returnable)

LBDDBR6408P-1

Scullery Sinks

WASTE LOCATION

Center (C)
Right rear (RR)
Left rear (LR)

WASTE SIZE

(Indicated in model number, eg. SL2424-1)

- The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.
- The suffix (-5) indicates a 1 1/2" (38mm) duplex waste assembly, rubber stopper, and 1 1/2" (DN38) brass tailpiece with standpipe and guard.

FAUCET HOLE OPTIONS (STANDARD)


2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.

CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

FLOOR TO RIM:

35" (890mm)

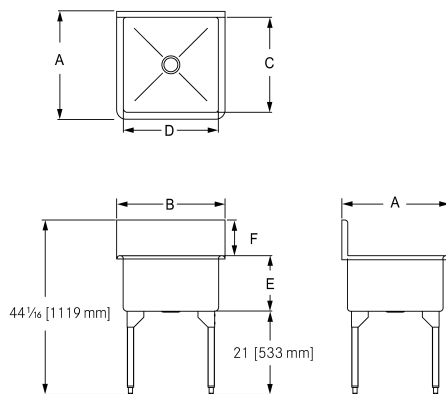

UPC®

Single compartment


CLASSIC SERIES - 16 GAUGE, OPTIONAL REMOVABLE DRAINBOARD

Single compartment scullery sink. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished to a #4 satin finish. Sink compartment sloped to drain with radius coved corners on front and back only. Rolled rim. Stainless steel tubular legs with adjustable feet. Includes waste fitting. Certified to ASME A112.19.3-2008 / CSA B45.4-08

OVERALL DIMENSIONS

SINK COMPARTMENT DIMENSIONS

MODEL	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F (BACKSPLASH)	WASTE LOCATION
SL2424-1	27 3/16" (691 mm)	27 3/8" (695 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C
SL2424-5	27 3/16" (691 mm)	27 3/8" (695 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR
SL2448-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	C
SL2448-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR

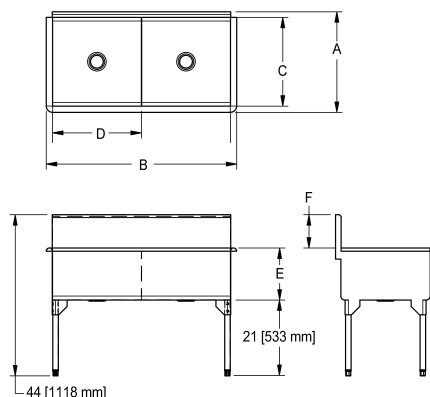

UPC®

Double Compartment

CLASSIC SERIES - 16 GAUGE, OPTIONAL REMOVABLE DRAINBOARD

Double compartment scullery sink. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished to a #4 satin finish. Sink compartment sloped to drain with radius coved corners on front and back only. Rolled rim. Stainless steel tubular legs with adjustable feet. Includes waste fitting. Certified to ASME A112.19.3-2008 / CSA B45.4-08



OVERALL DIMENSIONS

SINK COMPARTMENT DIMENSIONS

MODEL	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F (BACKSPLASH)	WASTE LOCATION
DL2448-1	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	C
DL2448-5	27 3/16" (691 mm)	51 3/8" (1305 mm)	24" (610 mm)	48" (1219 mm)	14" (356 mm)	9" (229 mm)	RR, LR



cUPC®

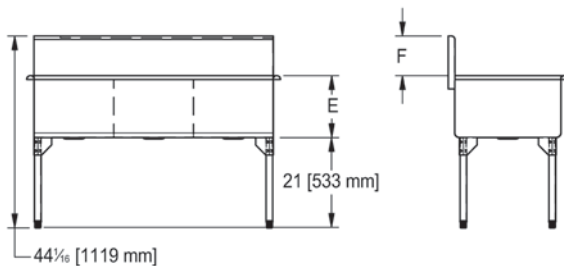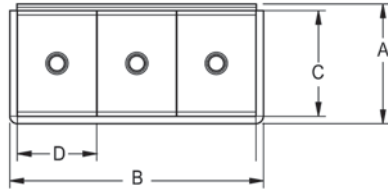

CLASSIC SERIES - 16 GAUGE, OPTIONAL REMOVABLE DRAINBOARD

Triple compartment scullery sink. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished to a #4 satin finish. Sink compartments sloped to drain with radius coved corners on front and back only. Rolled rim. Stainless steel tubular legs with adjustable feet. Includes waste fittings. Certified to ASME A112.19.3-2008 / CSA B45.4-08

WASTE SIZE

(Indicated in model number, eg. TL2454-5)

- The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.
- The suffix (-5) indicates a 1 1/2" (38mm) duplex waste assembly, rubber stopper, and 1 1/2" (DN38) brass tailpiece with standpipe and guard.

WASTE LOCATION

Center (C)
Right rear (RR)
Left rear (LR)

FAUCET HOLE OPTIONS (STANDARD)

2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.

CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

FLOOR TO RIM:

35" (890mm)

Triple Compartment

MODEL	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS				WASTE LOCATION
	A FRONT-BACK	B LEFT-RIGHT	C FRONT-BACK	D LEFT-RIGHT	E DEPTH	F (BACKSPLASH)	
TL2454-1	27 3/16" (691 mm)	57 3/8" (1457 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	C
TL2454-5	27 3/16" (691 mm)	57 3/8" (1457 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)	RR, RR, LR
TL2472-1	27 3/16" (691 mm)	75 3/8" (1915 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	C
TL2472-5	27 3/16" (691 mm)	75 3/8" (1915 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)	RR, RR, LR


REMOVABLE DRAINBOARD

Removable drainboard for classic series scullery sinks. Made from 16 gauge (1.5 mm) type 304 stainless steel. Polished to a satin finish. The legs have adjustable feet and are interchangeable such that the product can be installed on either the left or right of the scullery.

Mounting left or right

23 x 24 x 36" Overall (FB x LR x H).

584 x 610 x 914 mm Overall (FB x LR x H).

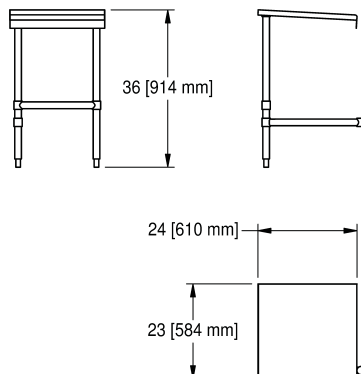


CL-DB

Scullery Sinks

Model illustrated is
without a drainboard

UPC®

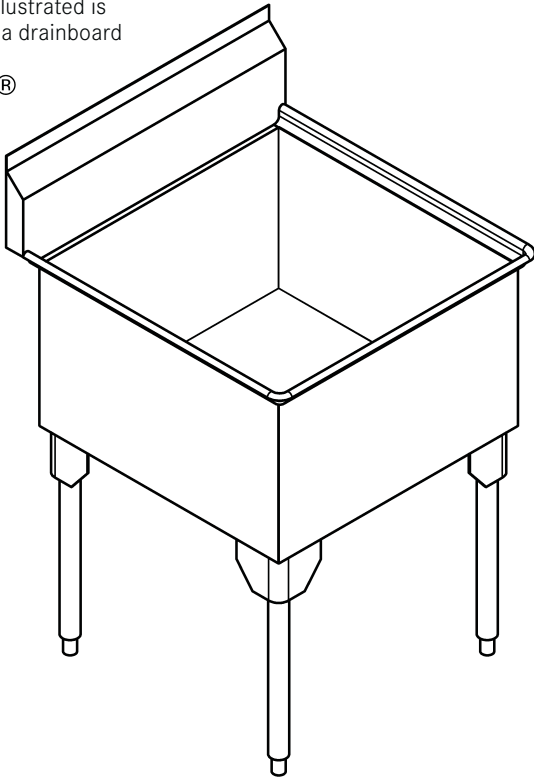

SERVICE SERIES - 14 GAUGE, SQUARE BOWL CORNERS

Single compartment "Service Series" scullery sink. Service Series sculleries are purpose built utility free standing utility sinks which can handle anything you throw at it. Heavy 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished to a #4 satin finish. Compartment is fully welded square corner construction. Finished with a rolled rim. Stainless steel tubular legs with adjustable feet for leveling. Waste fitting included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery. This series of scullery sinks are built to order and are non-returnable.

WASTE SIZE

(Indicated in model number, eg. SSL2418-1)

The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

WASTE LOCATION

Center (C)

FAUCET HOLE OPTIONS (STANDARD)

2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.

CUSTOM FAUCET HOLES


Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

FLOOR TO WORK SURFACE

35" (889 mm)


DRAINBOARD

24" x 24" (61 x 61 mm)




Single Compartment - without drainboard

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
SSL2418-1	28 1/2" (724 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
SSL2424-1	28 1/2" (724 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)



Single Compartment - drainboard left or right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
SSL2418L-1	28 1/2" (724 mm)	44 1/8" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
SSL2418R-1	28 1/2" (724 mm)	44 1/8" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
SSL2424L-1	28 1/2" (724 mm)	50 1/8" (1273 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)
SSL2424R-1	28 1/2" (724 mm)	50 1/8" (1273 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)




Single Compartment - drainboard left and right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
SSL2418LR-1	28 1/2" (724 mm)	66" (1676 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
SSL2424LR-1	28 1/2" (724 mm)	72" (1829 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)

Model illustrated is
without a drainboard

UPC®

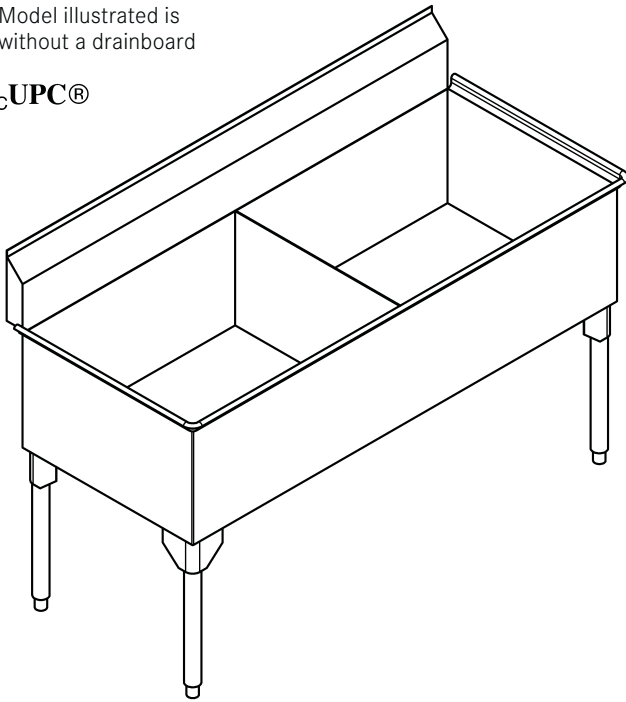

SERVICE SERIES - 14 GAUGE, SQUARE BOWL CORNERS

Double compartment "Service Series" scullery sink. These sculleries are purpose built free standing utility sinks which can handle anything you throw at it. Heavy 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished to a #4 satin finish. Compartments are fully welded square corner construction. Finished with a rolled rim. Stainless steel tubular legs with adjustable feet for leveling. Waste fitting included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery. This series of scullery sinks are built to order and are non-returnable.

WASTE SIZE

(Indicated in model number, eg. SDL2436-1)

The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece

WASTE LOCATION

Center (C)

FAUCET HOLE OPTIONS (STANDARD)

2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.

CUSTOM FAUCET HOLES


Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

FLOOR TO WORK SURFACE

35" (889 mm)

DRAINBOARD

24" x 24" (61 x 61 mm)




Double Compartment - without drainboard

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
SDL2436-1	28 1/2" (724 mm)	40 1/4" (1022 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
SDL2448-1	28 1/2" (724 mm)	52 1/4" (1327 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)



Double Compartment - drainboard left or right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
SDL2436L-1	28 1/2" (724 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
SDL2436R-1	28 1/2" (724 mm)	62 1/8" (1578 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
SDL2448L-1	28 1/2" (724 mm)	74 1/8" (1883 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)
SDL2448R-1	28 1/2" (724 mm)	74 1/8" (1883 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)




Double Compartment - drainboard left and right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
SDL2436LR-1	28 1/2" (724 mm)	84" (2133 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
SDL2448LR-1	28 1/2" (724 mm)	96" (2438 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)

Scullery Sinks

Model illustrated is
without a drainboard

cUPC®

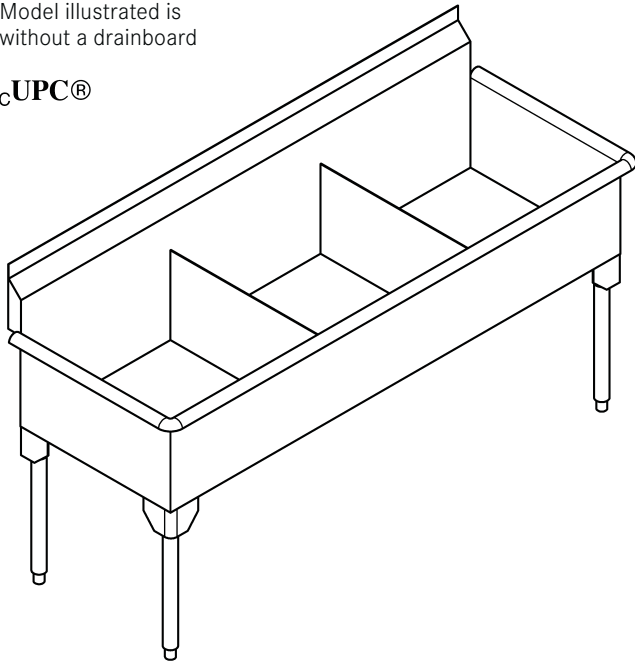

SERVICE SERIES - 14 GAUGE, SQUARE BOWL CORNERS

Triple compartment "Service Series" scullery sink. These sculleries are purpose built utility free standing utility sinks which can handle anything you throw at it. Heavy 14 gauge (2.0 mm), type 304 (CNS 18/10) stainless steel. Polished to a #4 satin finish. Compartments are fully welded square corner construction. Finished with a rolled rim. Stainless steel tubular legs with adjustable feet for leveling. Waste fitting included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery. This series of scullery sinks are built to order and are non-returnable.

WASTE SIZE

(Indicated in model number, eg. STL2454-1)

The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

WASTE LOCATION

Center (C)

FAUCET HOLE OPTIONS (STANDARD)

2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.

CUSTOM FAUCET HOLES


Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

FLOOR TO WORK SURFACE

35" (889 mm)


DRAINBOARD

24" x 24" (61 x 61 mm)




Triple Compartment - without drainboard

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
STL2454-1	28 1/2" (724 mm)	58 1/4" (1480 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
STL2472-1	28 1/2" (724 mm)	76 1/4" (1937 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)



Triple Compartment - drainboard left or right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
STL2454L-1	28 1/2" (724 mm)	80 1/8" (2035 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
STL2454R-1	28 1/2" (724 mm)	80 1/8" (2035 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
STL2472L-1	28 1/2" (724 mm)	98 1/8" (2492 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)
STL2472R-1	28 1/2" (724 mm)	98 1/8" (2492 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)




Triple Compartment - drainboard left and right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
STL2454LR-1	28 1/2" (724 mm)	102" (2590 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
STL2472LR-1	28 1/2" (724 mm)	120" (3048 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)

Model illustrated is
without a drainboard

cUPC®

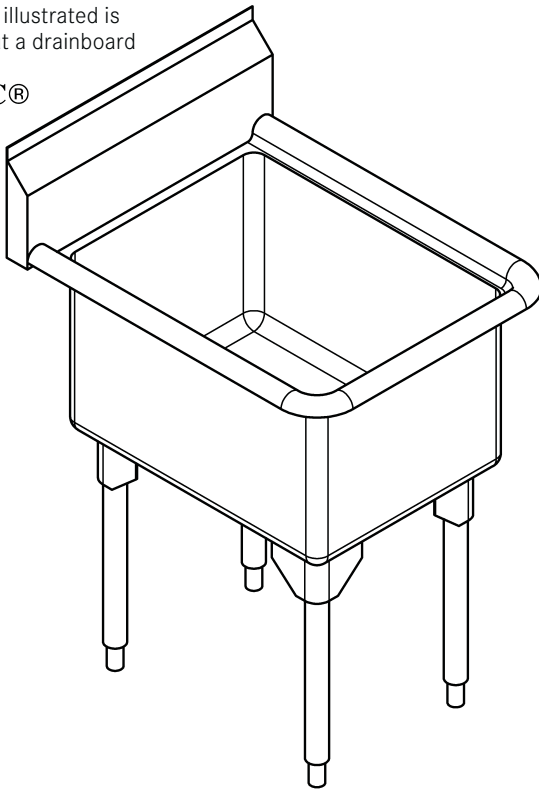

RESTAURANT SERIES - 16 GAUGE, RADIUS COVED BOWL CORNERS

Single compartment "Restaurant Series" scullery sink. These sculleries are free standing scullery sinks constructed with hygiene and food safety in mind. All radius coved bowl corners are easy to clean and there are no cracks or seams for bacteria to grow in. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished to a #4 satin finish. Finished with a rolled rim. Stainless steel tubular legs with adjustable feet for leveling. Waste fitting included. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery. This series of scullery sinks are built to order and are non-returnable.

WASTE SIZE

(Indicated in model number, eg. RSL2418-1)

The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

WASTE LOCATION

Center (C)

FAUCET HOLE OPTIONS (STANDARD)

2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.

CUSTOM FAUCET HOLES


Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

FLOOR TO WORK SURFACE

35" (889 mm)


DRAINBOARD

24" x 24" (61 x 61 mm)




Single Compartment - without drainboard

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
RSL2418-1	28 1/2" (724 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RSL2424-1	28 1/2" (724 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)



Single Compartment - drainboard left or right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
RSL2418L-1	28 1/2" (724 mm)	44 1/8" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RSL2418R-1	28 1/2" (724 mm)	44 1/8" (1121 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RSL2424L-1	28 1/2" (724 mm)	50 1/8" (1273 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)
RSL2424R-1	28 1/2" (724 mm)	50 1/8" (1273 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)




Single Compartment - drainboard left and right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
RSL2418LR-1	28 1/2" (724 mm)	66" (1676 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RSL2424LR-1	28 1/2" (724 mm)	72" (1829 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)

Scullery Sinks

Model illustrated is without a drainboard

cUPC®

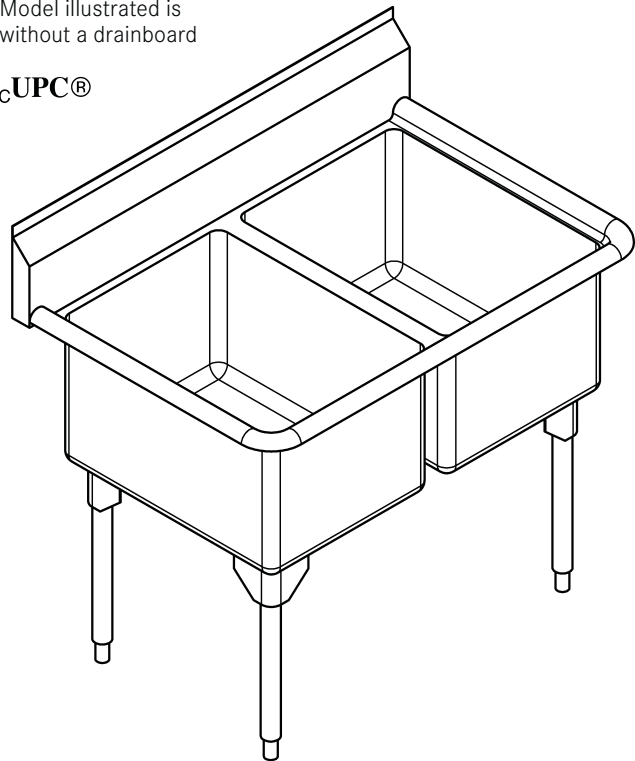

RESTAURANT SERIES - 16 GAUGE, RADIUS COVED BOWL CORNERS

Double compartment "Restaurant Series" scullery sink. These sculleries are free standing scullery sinks constructed with hygiene and food safety in mind. All radius coved bowl corners are easy to clean and there are no cracks or seams for bacteria to grow in. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished to a #4 satin finish. Finished with a rolled rim. Stainless steel tubular legs with adjustable feet for leveling. Waste fitting included. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery. This series of scullery sinks are built to order and are non-returnable.

WASTE SIZE

(Indicated in model number, eg. RDL2436-1)
The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

WASTE LOCATION

Center (C)

FAUCET HOLE OPTIONS (STANDARD)

2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.

CUSTOM FAUCET HOLES


Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

FLOOR TO WORK SURFACE

35" (889 mm)


DRAINBOARD

24" x 24" (61 x 61 mm)




Double Compartment - without drainboard

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
RDL2436-1	28 1/2" (724 mm)	42 1/4" (1073 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RDL2448-1	28 1/2" (724 mm)	54 1/4" (1378 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)



Double Compartment - drainboard left or right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
RDL2436L-1	28 1/2" (724 mm)	61 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RDL2436R-1	28 1/2" (724 mm)	61 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RDL2448L-1	28 1/2" (724 mm)	76 1/8" (1934 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)
RDL2448R-1	28 1/2" (724 mm)	76 1/8" (1934 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)




Double Compartment - drainboard left and right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
RDL2436LR-1	28 1/2" (724 mm)	86" (2184 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RDL2448LR-1	28 1/2" (724 mm)	98" (2489 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)

Model illustrated is
without a drainboard

UPC®

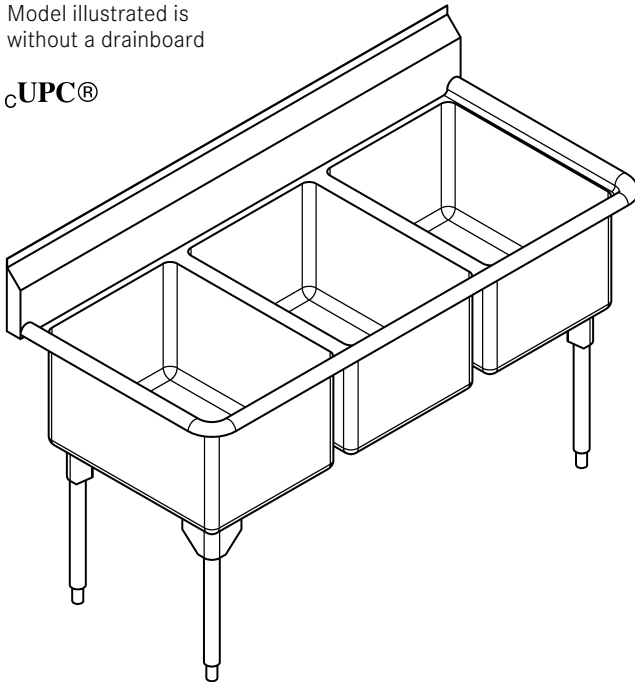

RESTAURANT SERIES - 16 GAUGE, RADIUS COVED BOWL CORNERS

Triple compartment "Restaurant Series" scullery sink. These sculleries are free standing scullery sinks constructed with hygiene and food safety in mind. All radius coved bowl corners are easy to clean and there are no cracks or seams for bacteria to grow in. 16 gauge (1.5 mm), type 304 (CNS 18/10) stainless steel. Polished to a #4 satin finish. Finished with a rolled rim. Stainless steel tubular legs with adjustable feet for leveling. Waste fitting included. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery. This series of scullery sinks are built to order and are non-returnable.

WASTE SIZE

(Indicated in model number, eg. RTL2454-1)

The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

WASTE LOCATION

Center (C)

FAUCET HOLE OPTIONS (STANDARD)

2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.

CUSTOM FAUCET HOLES


Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

FLOOR TO WORK SURFACE

35" (889 mm)


DRAINBOARD

24" x 24" (61 x 61 mm)




Triple Compartment - without drainboard

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
RTL2454-1	28 1/2" (724 mm)	62 1/4" (1581 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RTL2472-1	28 1/2" (724 mm)	80 1/4" (2038 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)



Triple Compartment - drainboard left or right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
RTL2454L-1	28 1/2" (724 mm)	84 1/8" (2137 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RTL2454R-1	28 1/2" (724 mm)	84 1/8" (2137 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RTL2472L-1	28 1/2" (724 mm)	102 1/8" (2594 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)
RTL2472R-1	28 1/2" (724 mm)	102 1/8" (2594 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)




Triple Compartment - drainboard left and right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
RTL2454LR-1	28 1/2" (724 mm)	106" (2692 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
RTL2472LR-1	28 1/2" (724 mm)	124" (3150 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)

Scullery Sinks

Model illustrated is without a drainboard

UPC®

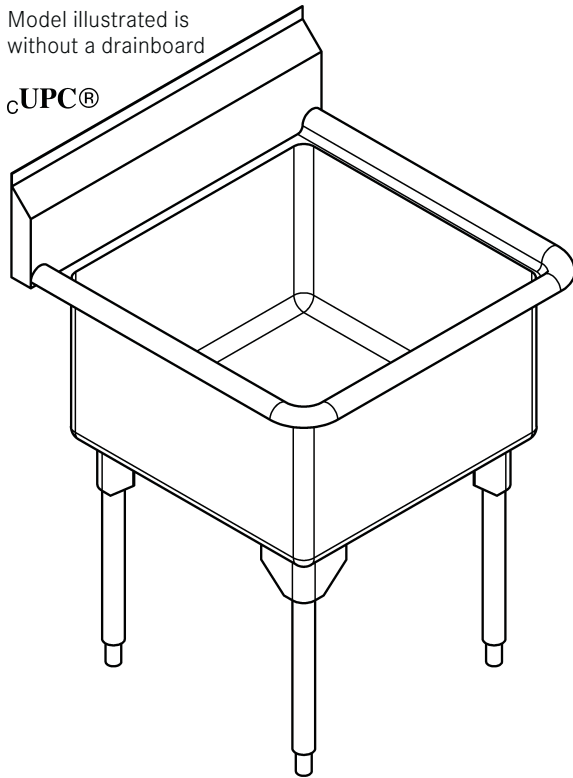

WORLD-CLASS SERIES, 14 GAUGE, RADIUS COVERED BOWL CORNERS

Single compartment "World Class Series" scullery sink. These sculleries are free standing scullery sinks fabricated from heavy 14 gauge (2.0 mm) type 304 (CNS 18/10) stainless steel. and designed for hygiene and food safety. Polished to a #4 satin finish. Finished with a rolled rim. Stainless steel tubular legs with adjustable feet for leveling. Waste fitting included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery. This series of scullery sinks are built to order and are non-returnable.

WASTE SIZE

(Indicated in model number, eg. WSL2418-1)

The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

WASTE LOCATION

Center (C)

FAUCET HOLE OPTIONS (STANDARD)

2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.

CUSTOM FAUCET HOLES


Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.

FLOOR TO WORK SURFACE

35" (889 mm)


DRAINBOARD

24" x 24" (61 x 61 mm)




Single Compartment - without drainboard

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
WSL2418-1	28 1/2" (724 mm)	22 1/4" (565 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
WSL2424-1	28 1/2" (724 mm)	28 1/4" (718 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)



Single Compartment - drainboard left or right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
WSL2418L-1	28 1/2" (724 mm)	44 1/8" (1021 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
WSL2418R-1	28 1/2" (724 mm)	44 1/8" (1021 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
WSL2424L-1	28 1/2" (724 mm)	50 1/8" (1273 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)
WSL2424R-1	28 1/2" (724 mm)	50 1/8" (1273 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)




Single Compartment - drainboard left and right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
WSL2418LR-1	28 1/2" (724 mm)	66" (1676 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
WSL2424LR-1	28 1/2" (724 mm)	72" (1829 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)

Model illustrated is
without a drainboard

UPC®

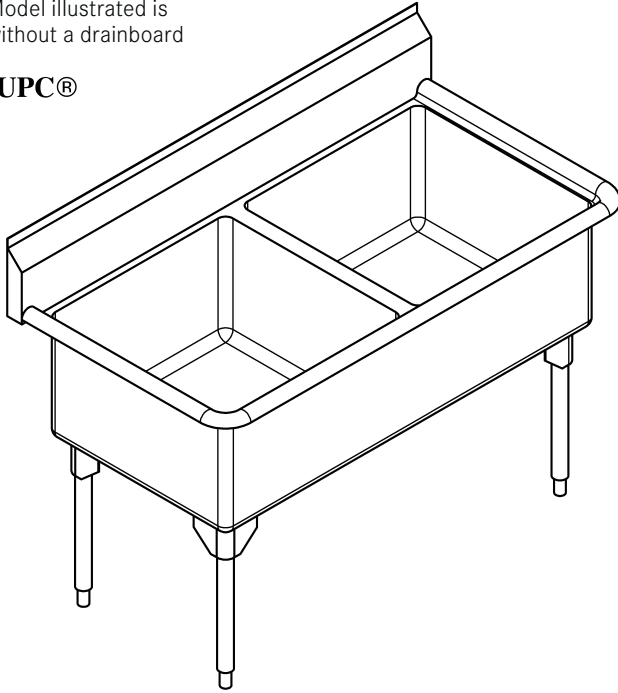

FLOOR TO WORK SURFACE
35" (889 mm)

DRAINBOARD
24" x 24" (61 x 61 mm)

WORLD-CLASS SERIES, 14 GAUGE, RADIUS COVED BOWL CORNERS

Double compartment "World Class Series" scullery sink. These sculleries are free standing scullery sinks fabricated from heavy 14 gauge (2.0 mm) type 304 (CNS 18/10) stainless steel, and designed for hygiene and food safety. Polished to a #4 satin finish. Finished with a rolled rim. Bowls have an extra piece of stainless steel welded as an apron in front to hide the gap inbetween bowls for ease of cleaning and a more refined look. Stainless steel tubular legs with adjustable feet for leveling. Waste fitting included. Certified to ASME A112.19.3-2008 / CSA B45.4-08. Please allow 4 weeks for delivery. This series of scullery sinks are built to order and are non-returnable.

WASTE SIZE

(Indicated in model number, eg. WDL2436-1)

The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

WASTE LOCATION


Center (C)

FAUCET HOLE OPTIONS (STANDARD)

2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.


CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.




Double Compartment - without drainboard

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
WDL2436-1	28 1/2" (724 mm)	42 1/4" (1073 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (929 mm)
WDL2448-1	28 1/2" (724 mm)	54 1/4" (1378 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)



Double Compartment - drainboard left or right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
WDL2436L-1	28 1/2" (724 mm)	61 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (929 mm)
WDL2436R-1	28 1/2" (724 mm)	61 1/8" (1629 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (929 mm)
WDL2448L-1	28 1/2" (724 mm)	76 1/8" (1934 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)
WDL2448R-1	28 1/2" (724 mm)	76 1/8" (1934 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)




Double Compartment - drainboard left and right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
WDL2436LR-1	28 1/2" (724 mm)	86" (2184 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (929 mm)
WDL2448LR-1	28 1/2" (724 mm)	98" (2489 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)

Scullery Sinks

Model illustrated is
without a drainboard

UPC®

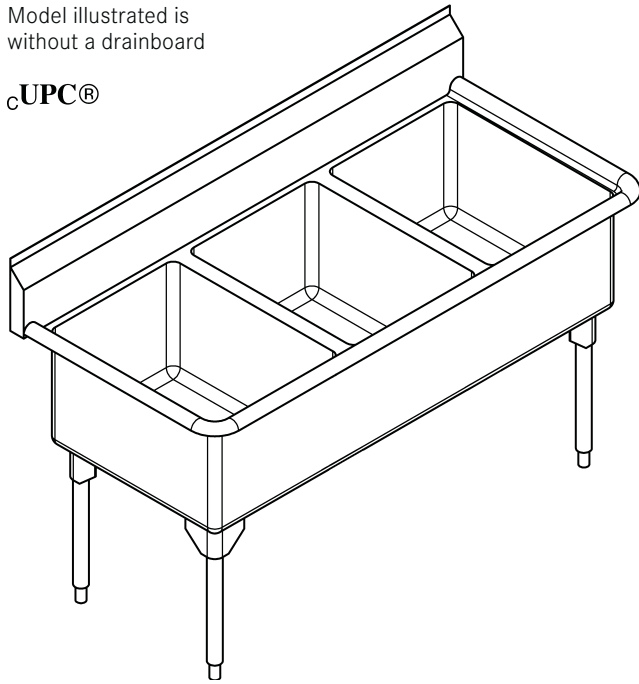

FLOOR TO WORK SURFACE
35" (889 mm)

DRAINBOARD
24" x 24" (61 x 61 mm)

WORLD-CLASS SERIES, 14 GAUGE, RADIUS COVED BOWL CORNERS

Triple compartment "World Class Series" scullery sink. These sculleries are free standing scullery sinks fabricated from heavy 14 gauge (2.0 mm) type 304 (CNS 18/10) stainless steel, and designed for hygiene and food safety. Polished to a #4 satin finish. Finished with a rolled rim. Bowls have an extra piece of stainless steel welded as an apron in front to hide the gap inbetween bowls for ease of cleaning and a more refined look. Left and right drainboards sloped toward bowl. Stainless steel tubular legs with adjustable feet for leveling. Waste fitting included. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Please allow 4 weeks for delivery. This series of scullery sinks are built to order and are non-returnable.

WASTE SIZE

(Indicated in model number, eg. WTL2454-1)

The suffix (-1) indicates a 3 1/2" (89mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

WASTE LOCATION


Center (C)

FAUCET HOLE OPTIONS (STANDARD)

2 hole, 1 1/4" (32mm) diameter, 8" (203mm) centerset, positioned 4" (102mm) below top of backsplash.


CUSTOM FAUCET HOLES

Custom faucet hole drillings are available on all models. Order model as indicated in chart below, specifying all necessary hole drilling information. Sinks with custom drillings are non-returnable.




Triple Compartment - without drainboard

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
WTL2454-1	28 1/2" (724 mm)	62 1/4" (1581 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
WTL2472-1	28 1/2" (724 mm)	80 1/4" (2038 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)



Triple Compartment - drainboard left or right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
WTL2454L-1	28 1/2" (724 mm)	84 1/8" (2137 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
WTL2454R-1	28 1/2" (724 mm)	84 1/8" (2137 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
WTL2472L-1	28 1/2" (724 mm)	102 1/8" (2594 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)
WTL2472R-1	28 1/2" (724 mm)	102 1/8" (2594 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)





Triple Compartment - drainboard left and right

	OVERALL DIMENSIONS		SINK COMPARTMENT DIMENSIONS			
	FRONT-BACK	LEFT-RIGHT	FRONT-BACK	LEFT-RIGHT	DEPTH	BACKSPLASH
WTL2454LR-1	28 1/2" (724 mm)	106" (2692 mm)	24" (610 mm)	18" (457 mm)	14" (356 mm)	9" (229 mm)
WTL2472LR-1	28 1/2" (724 mm)	124" (3150 mm)	24" (610 mm)	24" (610 mm)	14" (356 mm)	9" (229 mm)



cUPC®

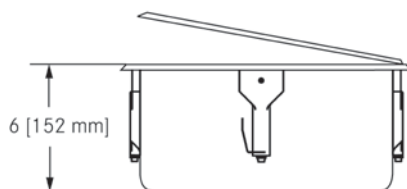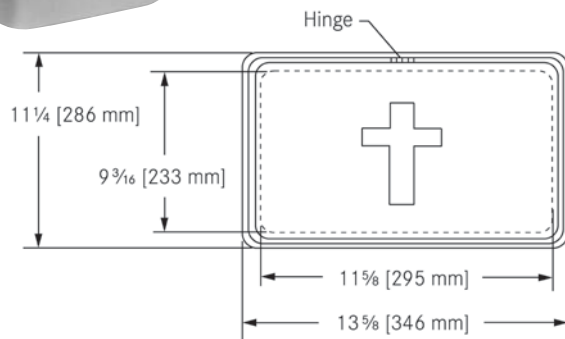

RECTANGULAR SINK FOR RELIGIOUS USE - HINGED LID

Single compartment self rimming topmount sink less faucet ledge. 20 gauge (0.9 mm), type 302 (CNS 18/8) stainless steel. Exposed surfaces are #4 satin finished. Undercoated to reduce condensation and resonance. Hinged top cover. Embossed cross. Includes waste fitting, factory applied rim seal, cutout template, and factory installed EZ TORQUE™ fasteners. Certified to ASME A112.19.3-2008 / CSA B45.4-08.

Wheelchair accessible: meets ADA (Americans with disabilities act guidelines) and ANSI A117.1 (Accessible and usable buildings and facilities). Check local codes to ensure compliance.


Center waste location. Includes 3 1/2" (89 mm) crumb cup strainer with 1 1/2" (DN38) brass tailpiece.

11 1/4 x 13 5/8" Overall. 9 3/16 x 11 5/8 x 6" Bowl. (FB x LR x D).

SS9126



cUPC®

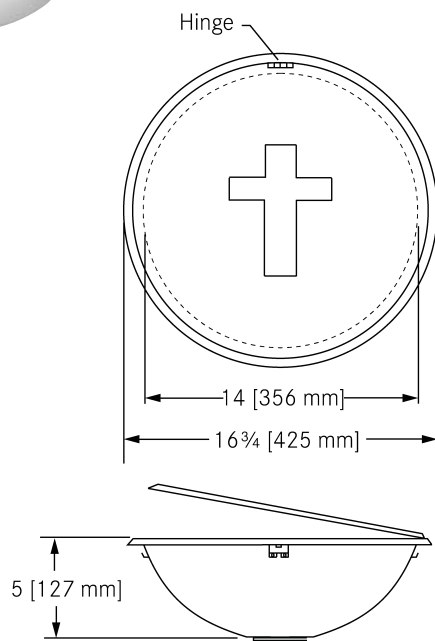

ROUND SINK FOR RELIGIOUS USE - HINGED LID

Single compartment self rimming topmount sink less faucet ledge. 18 gauge (1.2 mm), type 304 (CNS 18/10) stainless steel. Polished #4 satin finish. Undercoated to reduce condensation and resonance. Positive hold down clamping. Hinged top cover. Embossed cross. Certified to ASME A112.19.3-2008 / CSA B45.4-08.


Wheelchair accessible: meets ADA (Americans with disabilities act guidelines) and ANSI A117.1 (Accessible and usable buildings and facilities). Check local codes to ensure compliance.

1 1/2" (38 mm) duplex waste assembly included. Center waste location.

16 3/4 x 16 3/4" Overall. 14 x 14 x 5" Bowl. (FB x LR x D).

RS14

Urinals and Toilets

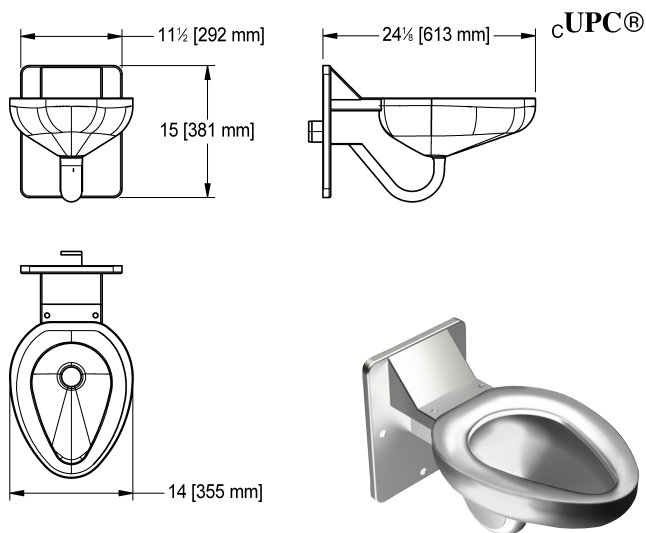


16 GAUGE WALL HUNG TOILET - REAR SPUD

The fixture is fabricated from 16 gauge (1.8 mm) type 304 (CNS 18/10) stainless steel. The elongated bowl is drawn and seamlessly welded and polished to a #4 satin finish. The toilet seat is polished to a sanitary mirror finish. Internal piping is 14 gauge, type 304 (CNS 18/10) stainless steel. Elongated design blow out jet bowl. The toilet requires a minimum of 35 PSI flow pressure. The toilet was tested and certified as a low water consumption toilet using only 1.6 gallons per flush (6 lpf). The trap will pass a 2 1/8" (54 mm) ball and has a seal of 3.5" (88.9 mm) min. Flush valve connection is 1 1/2" (38.1mm) FIPT rear spud.

Installation: These fixtures are designed to be installed onto a 3 bolt blow out jet wall carrier. **A standard elongated toilet seat (supplied by others) can be used with this product.**

24 1/8" x 14" x 15" (D x W x H)
Front mounted.

HDWC2414-FM-R

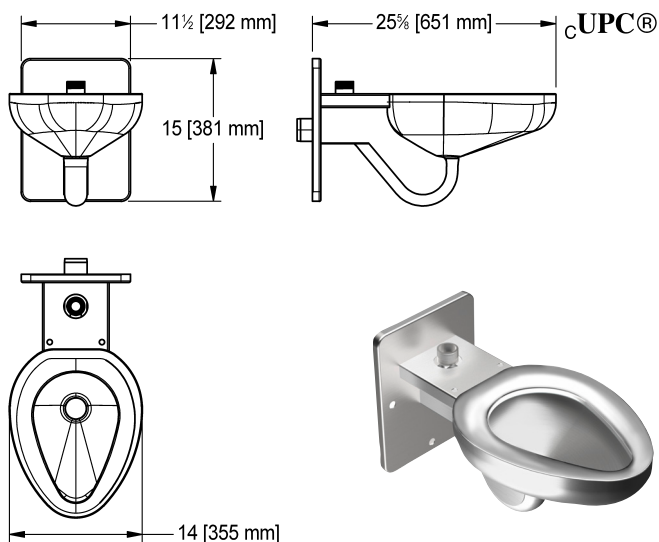

16 GAUGE WALL HUNG TOILET - TOP SPUD


The fixture is fabricated from 16 gauge (1.8 mm) type 304 (CNS 18/10) stainless steel. The elongated bowl is drawn and seamlessly welded and polished to a #4 satin finish. The toilet seat is polished to a sanitary mirror finish. Internal piping is 14 gauge, type 304 (CNS 18/10) stainless steel. Elongated design blow out jet bowl. The toilet requires a minimum of 35 PSI flow pressure. The toilet was tested and certified as a low water consumption toilet using only 1.6 gallons per flush (6 lpf). The trap will pass a 2 1/8" (54 mm) ball and has a seal of 3.5" (88.9 mm) min. Flush valve connection is 1 1/2" (38.1mm) FIPT top spud.

A standard elongated toilet seat (supplied by others) can be used with this product.

Installation: Fixture can be installed to a standard 3 bolt wall carrier for blowout jet toilets.

25 5/8" x 14" x 15" (D x W x H)
Front mounted.

HDWC2514-FM-T

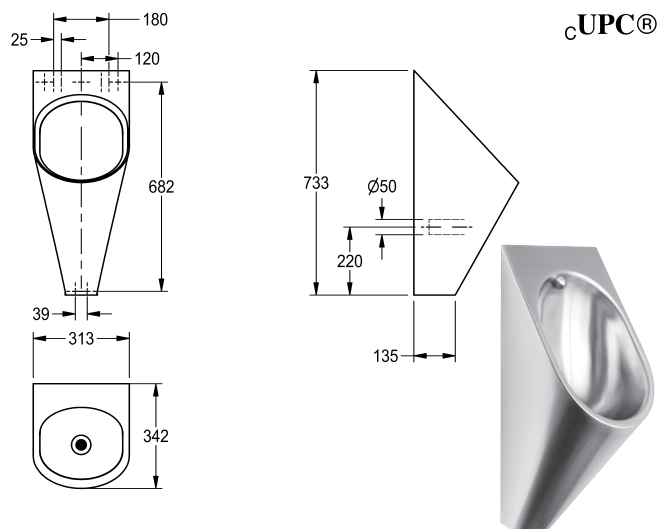

CAMPUS URINAL

Single urinal for wall mounting, stainless steel, surface satin finished, material thickness 1.2 mm, oval bowl, stainless steel spreader 1/2", hidden horizontal outlet towards wall, hidden screws, included trap DN 50, included mounting bracket and domed waste.

With 1/2" stainless steel spreader.

13 7/16" x 12 5/16" x 28 7/8" (D x W x H)

CMPX538




PAPER TOWEL DISPENSER - RODAN

Paper towel dispenser for wall mounting, stainless steel, surface satin finished, material thickness 22 gauge, folded front cover, cylinder lock with Franke standard key, inspection windows on sides, loading capacity 500 - 800 pcs. of paper depending on convolution, including stainless steel screws and dowels.

10 13/16 x 14 x 4 7/16" (W x H x D)
275 x 355 x 112 mm (W x H x D)

RODX600

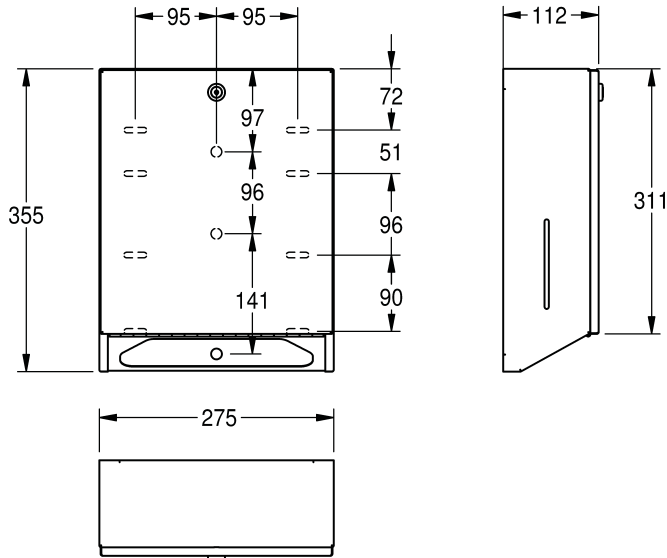


ELECTRONIC PAPER TOWEL DISPENSER - RODAN

Touch-free paper towel dispenser for wall mounting, stainless steel, surface satin finished, material thickness 22 gauge folded cover with cylinder lock and standard Franke key, infrared sensor activity for non-touch operation, integrated tear-off edge, needs 4 pcs. standard D 1.5 V batteries, maintenance free mechanic and easy paper roll change mechanism, for rolls with max. width 205 mm (8.07") and max. diameter 200 mm (7.87"), paper length adjustable to 200, 250 and 300 mm (7.87, 9.84" and 11.81"), including stainless steel screws and dowels.

11 7/16 x 15 3/8 x 8 7/8" (W x H x D)
290 x 390 x 226 mm (W x H x D)

RODX630

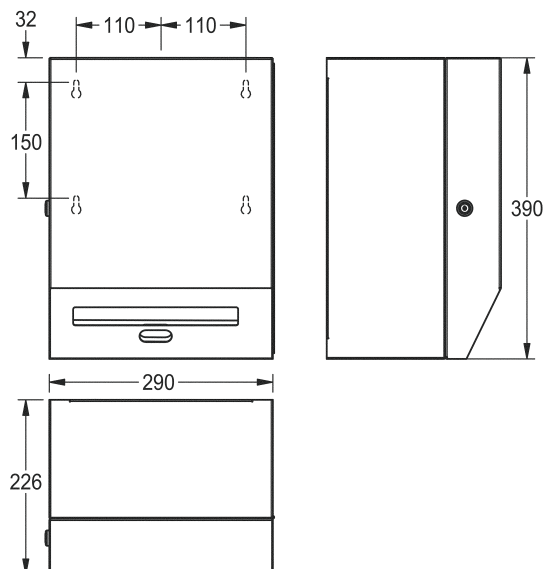

Washroom Accessories




RECESSED PAPER TOWEL DISPENSER - RODAN

Paper towel dispenser for recessed mounting, stainless steel, surface satin finished, material thickness 22 gauge, folded front cover, cylinder lock with Franke standard key, loading capacity 500 - 800 pcs. of paper depending on convolution, including stainless steel screws and dowels.

12 3/4 x 20 3/16 x 4 7/16" (W x H x D)

324 x 513 x 112 mm (W x H x D)

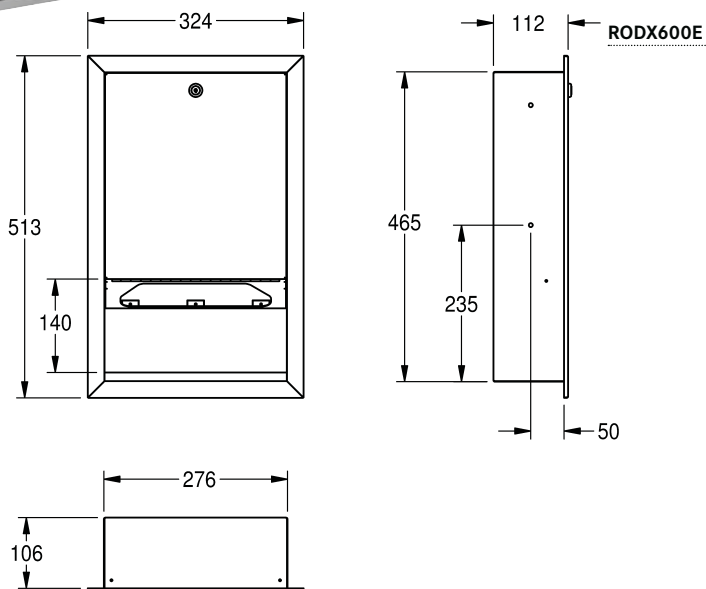


PAPER TOWEL DISPENSER - RODAN (HIDDEN MOUNTING)

Paper towel dispenser for hidden mounting behind wall and mirror, stainless steel, surface satin finished, material thickness 22 gauge for 600 - 800 paper towels, depending on convolution, filling from bottom, including stainless steel screws and dowels.

13 7/16 x 18 1/4 x 4 7/16" (W x H x D)

342 x 464 x 113 mm (W x H x D)

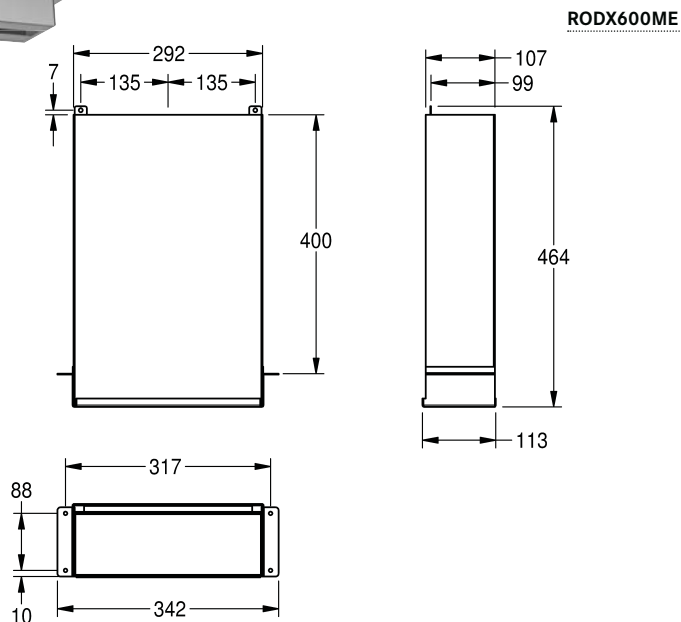



Z-FOLD PAPER TOWEL DISPENSER - EXOS

EXOS paper towel dispenser for wall mounting, stainless steel with satin finish, safety glass front panel, casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean). Material thickness 18 gauge, inspection window on side, capacity 300 - 400 pieces of Z-folded paper. Includes mounting materials.

Dimensions (W x H x D):

11 13/16 x 12 7/8 x 4 3/4"


300 x 326 x 120 mm

Black safety glass front panel

EXOS600B

White safety glass front panel

EXOS600W

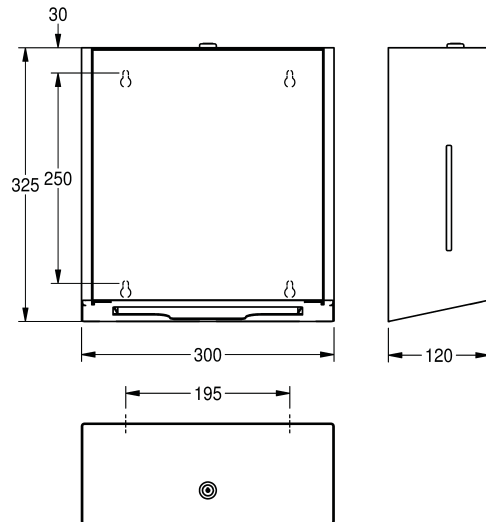

ROLLED PAPER TOWEL DISPENSER - EXOS

EXOS Rolled paper towel dispenser for wall mounting, stainless steel with satin finish, casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean). Material thickness 18 gauge. Maximum roll width 205 mm. Maximum roll diameter 200 mm. Paper perforation length 260 mm, adjustable paper roll holder for optimized paper dispensing. Includes mounting materials.

11 13/16 x 16 5/8 x 8 1/4" (W x H x D)


300 x 423 x 210 mm (W x H x D)

Black safety glass front panel


EXOS637B

White safety glass front panel

EXOS637W

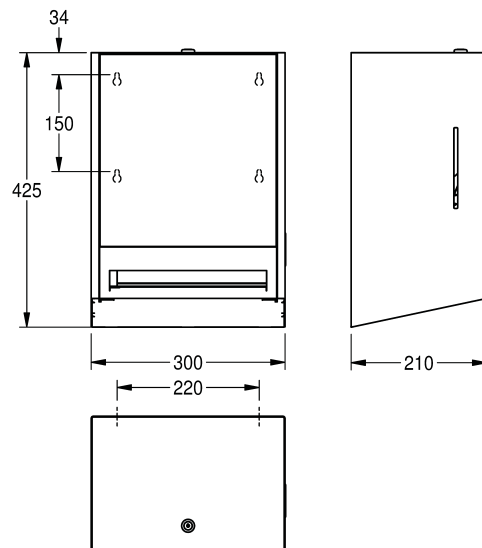

Washroom Accessories

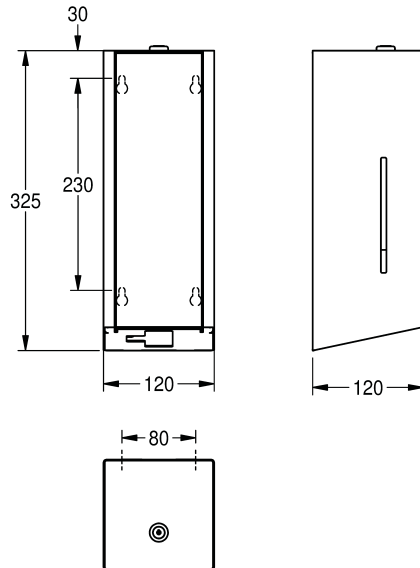

ELECTRONIC SOAP DISPENSER - EXOS

EXOS touch-free soap dispenser for wall mounting, stainless steel with satin finish, casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean). Material thickness 18 gauge, inspection window on side, infrared sensor activity for non-touch operation, LED display shows battery status, requires 4 pieces 1.5V AA batteries, suitable for liquid soap and lotions. Includes 800 ml refill tank, dispenses 0.6 - 1.1 ml depending on soap. Includes mounting materials.


4 3/4 x 12 7/8 x 4 3/4" (W x H x D)
120 x 326 x 120 mm (W x H x D)

Black safety glass front panel

EXOS625B

White safety glass front panel

EXOS625W

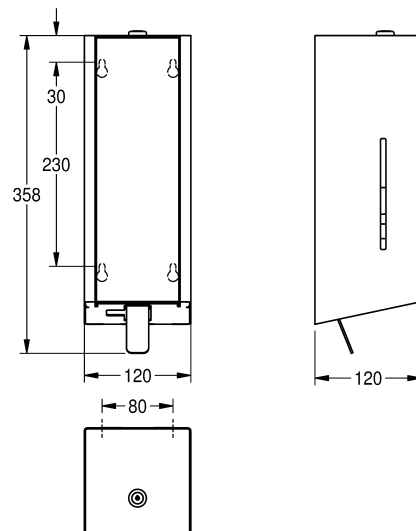

FOAM SOAP DISPENSER - EXOS

EXOS foam soap dispenser for wall mounting, stainless steel with satin finish, casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean). Material thickness 18 gauge, inspection window on side, with stainless steel pull lever, suitable for Franke foam soap. Includes mounting materials and 650 ml Franke foam soap.


4 3/4 x 12 7/8 x 4 3/4" (W x H x D)
120 x 326 x 120 mm (W x H x D)

Black safety glass front panel

EXOS616B

White safety glass front panel

EXOS616W

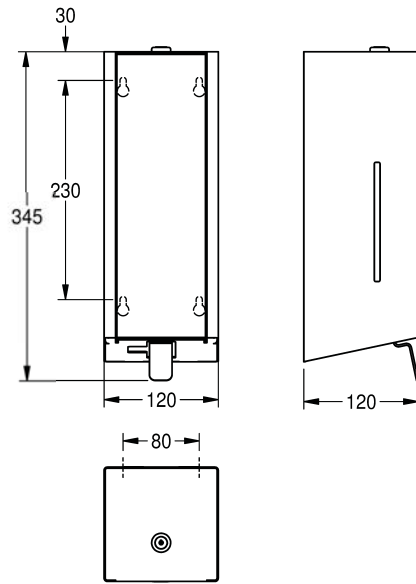

LIQUID SOAP DISPENSER - EXOS

EXOS soap dispenser for wall mounting, stainless steel with satin finish, casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean). Material thickness 18 gauge, inspection window on side, suitable for liquid soap and lotions, 800 ml refill tank, with stainless steel push lever. Easy to refill with soap tank on front panel. Includes mounting materials.


4 3/4 x 12 7/8 x 4 3/4" (W x H x D)
120 x 326 x 120 mm (W x H x D)

Black safety glass front panel

EXOS618B

White safety glass front panel

EXOS618W

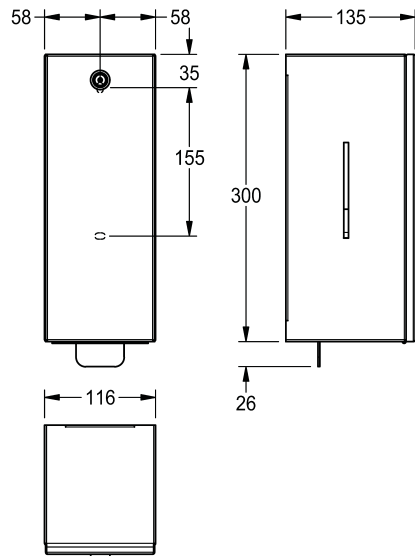


FOAM SOAP DISPENSER - RODAN **NEW**

Foam soap dispenser for wall mounting, stainless steel, surface satin finished, material thickness 20 gauge, cylinder lock with Franke standard key, inspection windows on sides, suitable for Franke foam soap (not included in scope of delivery), stainless steel pull lever, incl. stainless steel screws and dowels.

4 5/8" x 12 13/16" x 5 5/16" (W x H x D)
116 x 326 x 135 mm (W x H x D)

RODX616

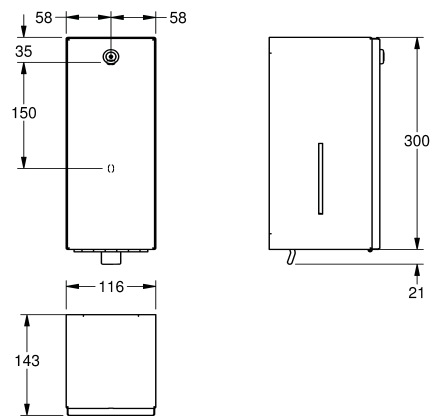


LIQUID SOAP DISPENSER - RODAN

Soap dispenser for wall mounting, stainless steel, surface satin finished, material thickness 20 gauge folded front cover, cylinder lock with Franke standard key. Suitable for liquid soaps and lotions, 0.8 liter soap tank, lever to pull, including stainless steel screws and dowels.

4 5/8 x 12 5/8 x 5 5/8" (W x H x D)
116 x 321 x 143 mm (W x H x D)

RODX618

Washroom Accessories

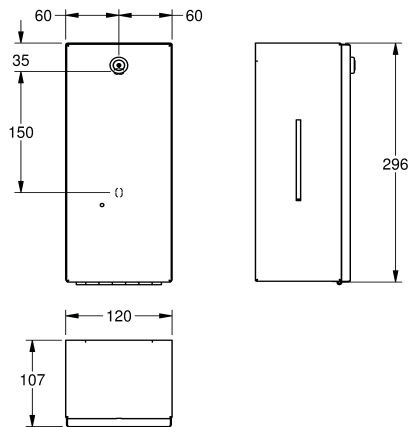


ELECTRONIC SOAP DISPENSER - RODAN

Touch-free soap dispenser for wall mounting, stainless steel, surface satin finished, material thickness 20 gauge folded front cover, cylinder lock with Franke standard key, infrared sensor activity for non-touch operation, LED-light shows battery status. Needs 6 pieces 1.5 V (=9 V) alkaline AA batteries. Suitable for liquid soaps and lotions, 800 ml soap tank, depending on soap between 0.6 and 1.1 ml is dispensed, including stainless steel screws and dowels.

4 3/4 x 11 5/8 x 4 3/16" (W x H x D)
120 x 296 x 107 mm (W x H x D)

RODX625

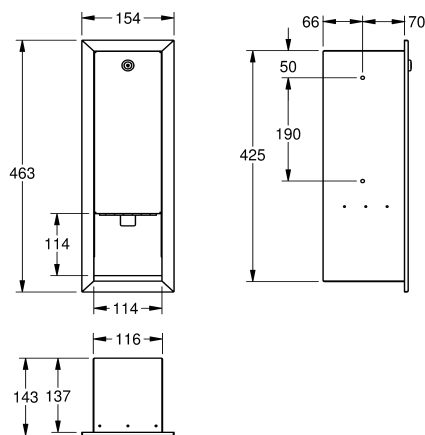


LIQUID SOAP DISPENSER, LEVER PULL - RODAN

Soap dispenser for recessed mounting, stainless steel, surface satin finished, material thickness 20 gauge folded front cover, cylinder lock with Franke standard key. Suitable for liquid soaps and lotions, 0.8 liter soap tank, lever to pull, including stainless steel screws and dowels.

6 1/16 x 18 1/4 x 5 5/8" (W x H x D)
154 x 463 x 143 mm (W x H x D)

RODX618E

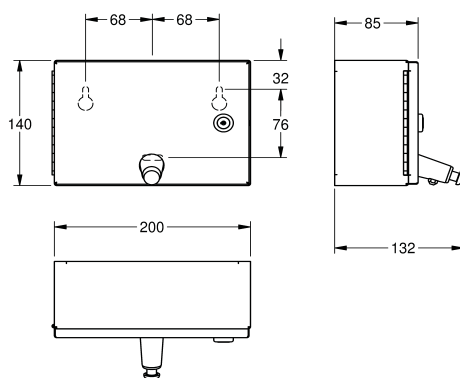


LIQUID SOAP DISPENSER, PUSH BUTTON - RODAN

Soap dispenser for wall mounting, stainless steel, surface satin finished, material thickness 20 gauge folded front cover, cylinder lock with Franke standard key. Suitable for liquid soaps and lotions, 1 liter soap tank, push button on front, including stainless steel screws and dowels.

7 7/8 x 5 1/2 x 5 3/16" (W x H x D)
200 x 140 x 132 mm (W x H x D)

RODX619

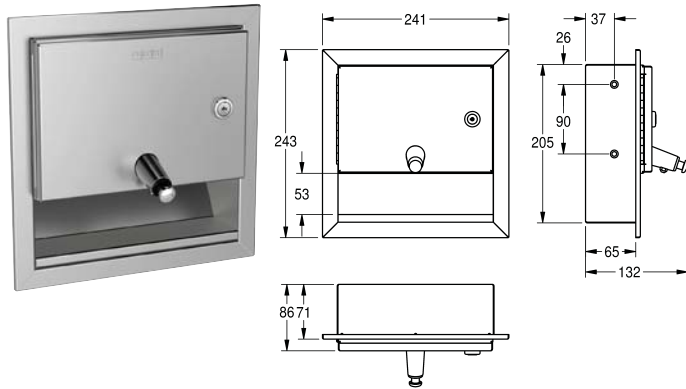


LIQUID SOAP DISPENSER, RECESSED - RODAN

Soap dispenser for recessed mounting, stainless steel, surface satin finished, material thickness 20 gauge folded front cover, cylinder lock with Franke standard key. Suitable for liquid soaps and lotions, 1 liter soap tank, push button on front, including stainless steel screws and dowels.

9 1/2 x 9 9/16 x 5 3/16" (W x H x D)
241 x 243 x 132 mm (W x H x D)

RODX619E

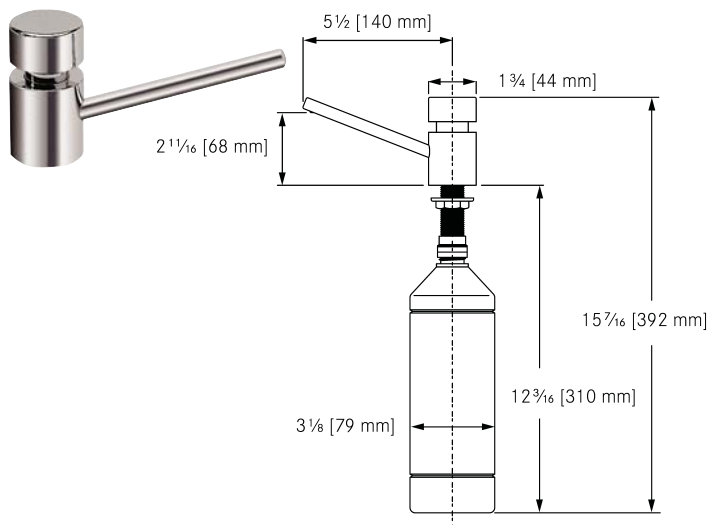

TOPMOUNT SOAP DISPENSER


Chrome soap dispenser manufactured from chromium plated brass. Incorporates a replaceable 1 liter polyethylene container for use with liquid soap standard.

1 3/4 x 5 1/2 x 15 7/16" Overall (FB x LR x H)
44 x 140 x 392 mm Overall (FB x LR x H)

SD80V

ACCESSORY:
Replacement Bottle

ESD80BOTTLE1

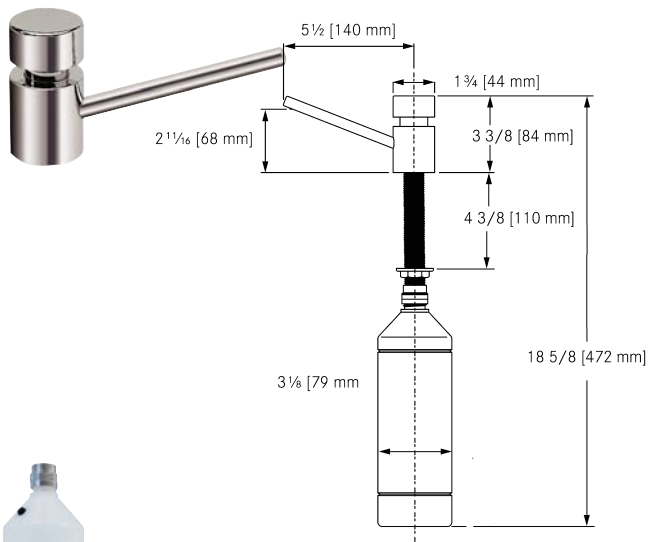

TOPMOUNT SOAP DISPENSER - EXTENDED SHAFT

Chrome soap dispenser manufactured from chromium plated brass. Shaft accommodates deeper countertops. Incorporates a replaceable 1 liter polyethylene container for use with liquid soap with extension for "Murro" basin (or equivalent).

1 3/4 x 5 1/2 x 18 5/8" Overall (FB x LR x H)
44 x 140 x 472 mm Overall (FB x LR x H)

SD80V-EXT

ACCESSORY:
Replacement Bottle

ESD80BOTTLE1




REPLACEMENT BOTTLE

Soap tank for SD80 and SD80V-EXT deck mounted soap dispenser. 1000 ml, including nut for connection.

ESD80BOTTLE1

Washroom Accessories

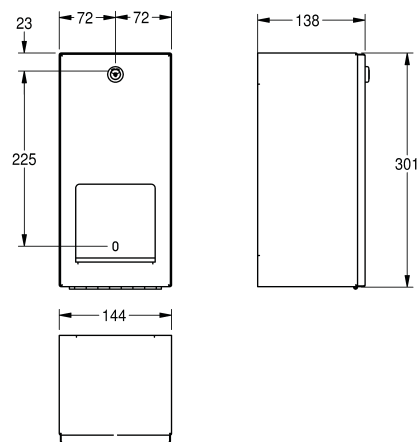


RODAN TOILET ROLL HOLDER

Double toilet roll holder with spindle system for wall mounting, stainless steel, surface satin finished, material thickness 22 gauge folded front cover, cylinder lock with Franke standard key, for 2 rolls with max. Ø 120 mm (4 3/4"). Second roll will be released after consumption of first roll, with spindles, reserve roll not visible, including stainless steel screws and dowels.

5 11/16 x 11 7/8 x 5 7/16" (W x H x D)
144 x 301 x 138 mm (W x H x D)

RODX672

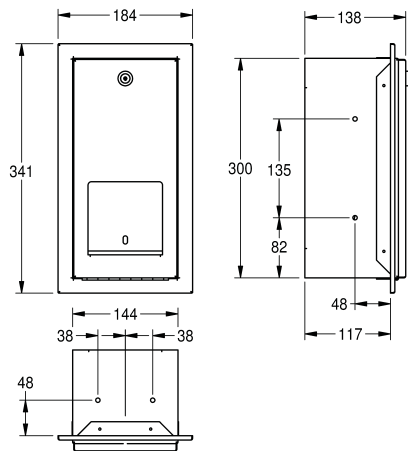


RODAN TOILET ROLL HOLDER - RECESSED MOUNTING

Double toilet roll holder with spindle system for recessed mounting, stainless steel, surface satin finished, material thickness 22 gauge folded front cover, cylinder lock with Franke standard key, for 2 rolls with max. Ø 120 mm (4 3/4"). Second roll will be released after consumption of first roll, reserve roll not visible, including stainless steel screws and dowels.

7 1/4 x 13 7/16 x 5 7/16" (W x H x D)
184 x 341 x 138 mm (W x H x D)

RODX672E

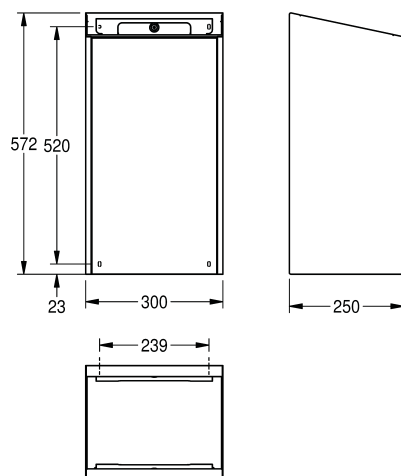

EXOS. WASTE BIN

EXOS waste bin for wall mounting, stainless steel with satin finish, casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean). Material thickness 18 gauge, capacity approximately 30 liters, integrated bag holder. Includes mounting bracket and mounting materials.


11 13/16 x 22 1/2 x 9 13/16" (W x H x D)
300 x 572 x 250 mm (W x H x D)

Black safety glass front panel

EXOS605B

White safety glass front panel

EXOS605W

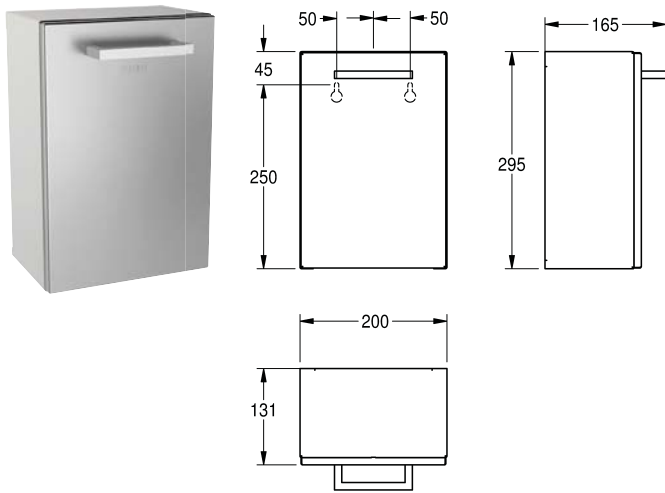


HYGIENE WASTE BIN - RODAN

Sanitary towel and disposal bin for wall mounting, stainless steel, surface satin finished, material thickness 22 gauge folded front cover, approximately 1 gallon capacity.

Removable plastic container inside, including stainless steel screws and dowels.

7 7/8 x 11 5/8 x 6 1/2" (W x H x D)
200 x 295 x 165 mm (W x H x D)

RODX611

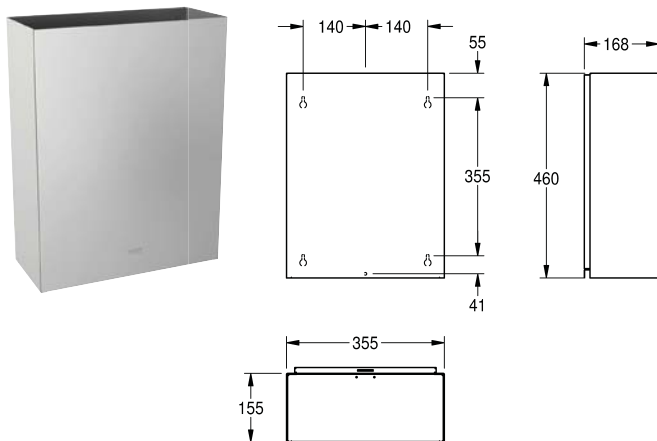


WASTE BIN FOR SURFACE MOUNTING - RODAN

Waste bin for wall mounting, stainless steel, surface satin finished, material thickness 22 gauge rounded edges, mounting either with mounting bracket or directly onto the wall, including stainless steel screws and dowels.

Capacity: approx. 23 liter

14 x 18 1/8 x 6 5/8" (W x H x D)
356 x 460 x 168 mm (W x H x D)

RODX605

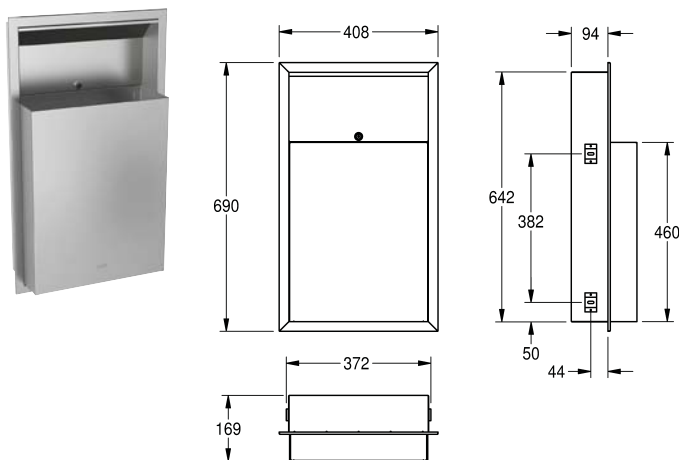

WASTE BIN WITH IN-WALL FRAME - RODAN


Waste bin for recessed mounting, stainless steel, surface satin finished, material thickness 22 gauge rounded edges, cylinder lock with Franke standard key, mounting with in-wall frame, including stainless steel screws and dowels.

Capacity: approx. 23 liter

16 1/16 x 27 13/16 x 6 5/8" (W x H x D)
408 x 690 x 169 mm (W x H x D)

RODX605E

Washroom Accessories

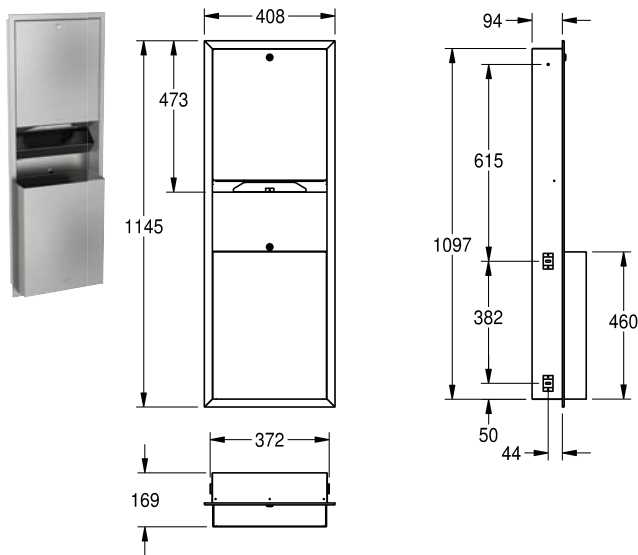


PAPER TOWEL/WASTE BIN COMBINATION, RECESSED MOUNTING - RODAN

Paper towel dispenser - waste bin combination for recessed mounting, stainless steel, surface satin finished, material thickness 22 gauge folded front cover, cylinder lock with Franke standard key, loading capacity 500 - 800 pcs. of paper depending on convolution, waste bin with approx. 23 liter capacity, including stainless steel screws and dowels.

16 1/16 x 45 1/16 x 6 5/8" (W x H x D)
408 x 1145 x 169 mm (W x H x D)

RODX602E

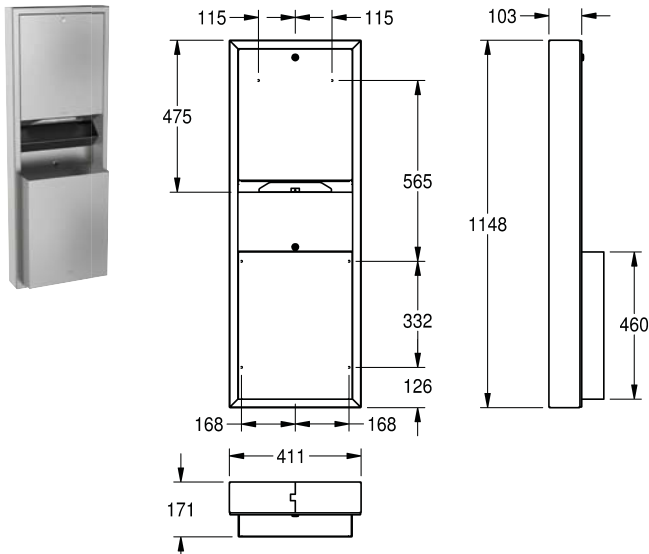


PAPER TOWEL/WASTE BIN COMBINATION, WALL MOUNTING - RODAN

Paper towel dispenser, waste bin combination for wall mounting, stainless steel, surface satin finished, material thickness 22 gauge folded front cover, cylinder lock with Franke standard key, loading capacity 500 - 800 pcs. of paper depending on convolution, waste bin with approx. 23 liter capacity, including stainless steel screws and dowels.

16 3/16 x 45 3/16 x 6 3/4" (W x H x D)
411 x 1148 x 171 mm (W x H x D)

RODX602

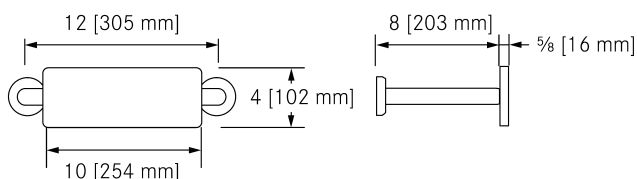


BACK REST - 8 INCH DEPTH

Back rest. Stainless steel bar uses #4 gloss with flanges and covers, with antique white solid core plastic laminate panel back. Concealed snap flanges and mounting hardware included. Provide adequate backing in wall for support and comply to local codes for barrier free requirements. Overall size of left to right is measured center to center.

4 x 12 x 1 1/4" Overall (FB x LR x H)
102 x 305 x 32 mm Overall (FB x LR x H)

CM-16104

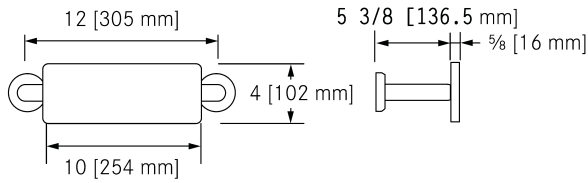


BACK REST - 5 INCH DEPTH

Back rest for Wall Mount Toilet. Stainless steel bar uses #4 satin finish with flanges and covers, with antique white solid core plastic laminate panel back. Concealed snap flanges and mounting hardware included. Provide adequate backing in wall for support and comply to local codes for barrier free requirements.

4 x 12 x 1 1/4" Overall (FB x LR x H)
102 x 305 x 32 mm Overall (FB x LR x H)

CM-16104-WM

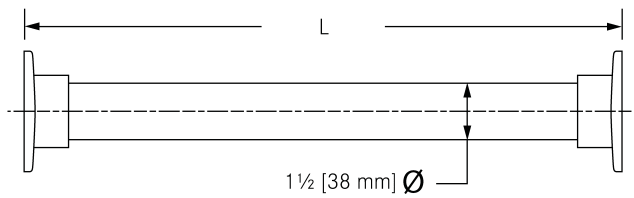

CURTAIN ROD

Curtain rod, stainless steel tubing, 1 1/2" (38 mm) diameter. Exposed surfaces finished to a #4 satin finish. Polished chrome flanges and mounting hardware included.

36" (914 mm) length

CR-36

48" (1220 mm) length

CR-48

60" (1525 mm) length


CR-60

72" (1830 mm) length

CR-72



Washroom Accessories

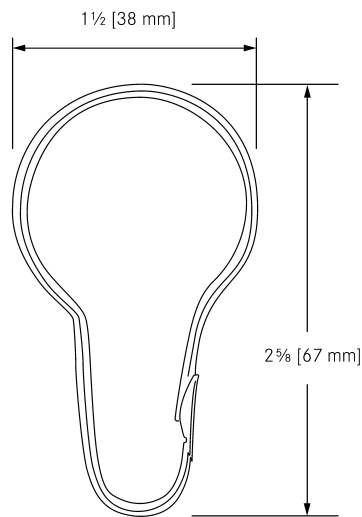


CURTAIN HOOK

Curtain Hook. Polished chrome finish. 12 pieces.
Stainless steel wire, with snap ring locking device and polished chrome finish.

1 1/2 x 2 5/8" Overall (W x L)
38 x 67 mm Overall (W x L)

CH-02

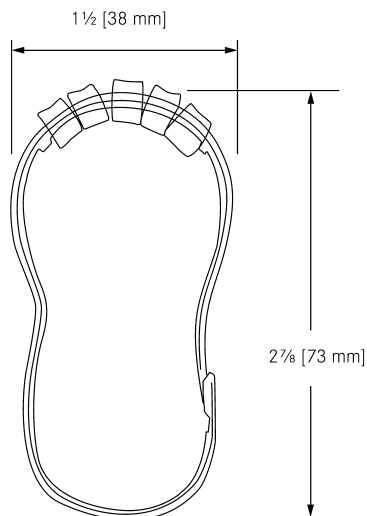


CURTAIN HOOK - WITH ROLLERS

Curtain Hook. Polished chrome finish. 12 pieces.
Stainless steel wire, with snap ring locking device and rollers with polished chrome finish.

1 1/2 x 2 7/8" Overall (W x L)
38 x 73 mm Overall (W x L)

CH-01



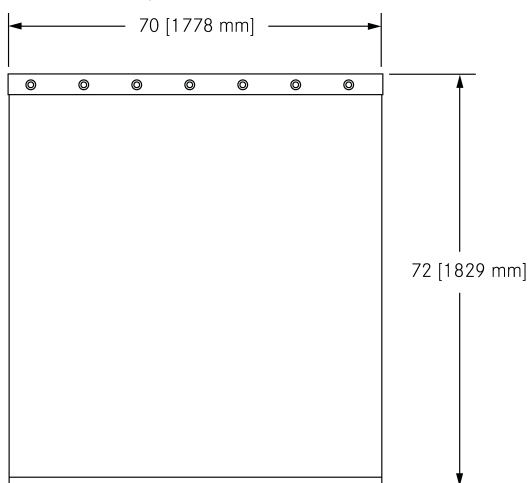

CV-00

SHOWER CURTAIN

Deluxe shower curtain. Opaque white vinyl, matte finish with nickel-plated grommets.

70 x 72" Overall (W x L)


CV-00

48 x 70" Overall (W x L)

CV-01

70 x 70" Overall (W x L)

CV-02

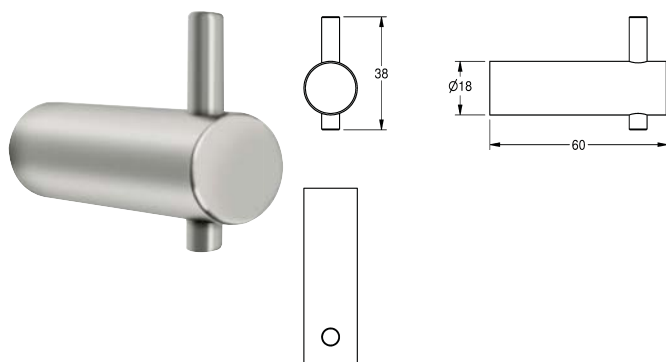


CLOTHES HOOK, VERTICAL - STRATOS

Hook for wall mounting, stainless steel, surface satin finished, 1/2" (18 mm) tube diameter, drilled hole on bottom for fixation, includes stainless steel screws and dowels.

2 3/8 x 1 1/2" (Front to Back x Height)

STRX692

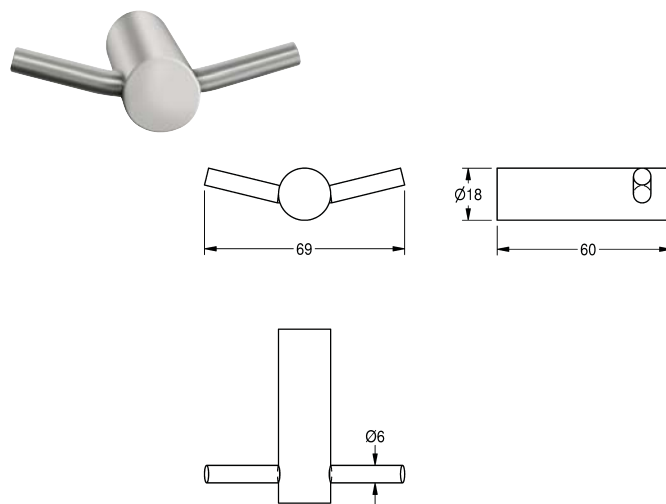

CLOTHES HOOK, HORIZONTAL - STRATOS

Double hook for wall mounting, stainless steel, surface satin finished, 1/2" (18 mm) tube diameter, drilled hole on bottom for fixation, inclusive stainless steel screws and dowels. Diameter 1/2".

2 11/16" x 2 3/8" (W x D)
69 x 60 mm (W x D)

STRX694

Product Matrix

Healthcare Range

 <p>16 gauge, premium surgical scrub station (SSU1-2016-00)</p>	 <p>16 gauge, premium surgical scrub station (SSU1-2020-00)</p>	 <p>16 gauge, premium surgical scrub station (ssu2-2040-00)</p>	 <p>18 gauge, surgical scrub station (SSU1 series)</p>
 <p>18 gauge, surgical scrub station (SSU2 series)</p>	 <p>18 gauge, surgical scrub station (SSU3 series)</p>	 <p>Scrub station backsplash (SSU-BS)</p>	 <p>Clinical hand wash sink (HWS0610P-3)</p>
 <p>Clinical hand wash sink (HWS6810P-3)</p>	 <p>Clinical hand wash sink (AWHB1414P-00)</p>	 <p>Clinical hand wash sink (HWSS2321W-00)</p>	 <p>Clinical hand wash basin (HWS1414P-00)</p>
 <p>Clinical hand wash basin (HWSS1420P-00)</p>	 <p>Clinical hand wash basin (HWSS1518P-00)</p>	 <p>Bariatric & mental health accessories</p>	 <p>Bariatric & mental health fixtures</p>
 <p>Ozo-flo retrofit ozone faucet (HWF-41)</p>			

Classroom Sink Range

 <p>Ledges back & left, center waste (ALBLS4605P-1)*</p>	 <p>Ledges back & left, rear waste (ALBLS7005P-1)*</p>	 <p>Ledges back & right, center waste (ALBRS4605P-1)*</p>	 <p>Ledges back & right, rear waste (ALBRS7005P-1)*</p>
 <p>Ledges back, left & right, rear waste (ALBLRS7005P-1)*</p>	 <p>Ledges opposing, center waste (ALHS4605P-1)*</p>	 <p>Ledges opposing, rear waste (ALHS7305P-1)*</p>	
 <p>Ledge right, (ALRS4605P-1)*</p>	 <p>Topmount hand fab (ART series with -1 waste)*</p>	 <p>Topmount hand fab, 1-1/2" waste with rubber stopper & tailpiece (ART series with -3C waste)</p>	 <p>Miranit® composite, 2 wash places (SANW200)</p>
 <p>Miranit® composite, 4 wash places (SANW205)</p>	 <p>Miranit® composite, 4 wash places (SANW211) §</p>	 <p>Miranit® composite, 4 wash places (SANW212) §</p>	 <p>Miranit® composite, 3 wash places (SANW215)</p>

All classroom sinks are 18 gauge stainless steel with 3-1/2" (unless otherwise specified)

* Additional models in same configuration available with deeper bowls

§ Reversed low/high mounting model available

Product Matrix

Type 316 Commercial Sink Range

 <p>18 gauge, 3-1/2" center waste (S6810/316P-1) (ZLBS9407/316P-1 inset)</p>	 <p>18 gauge, 1-1/2" waste, rubber stopper (S9106/316P-3) (ZLBS4610/316PC-3 inset)</p>	 <p>18 gauge, 1-1/2" rear waste, rubber stopper (S6810/316P-3) (ZLBS6810/316P-3 inset)</p>	 <p>18 gauge, 3 1/2" rear waste (S6808/316P-1) (ZLBS4607/316P-1 inset)</p>
 <p>18 gauge, 3 1/2" rear waste (D6410/316PCB-1) (ZLBD6408/316P-1 inset)</p>	 <p>18 gauge, 3 1/2" center waste (UCS4608/316P-1)</p>	 <p>18 gauge, 3 1/2" rear waste (UCS6808/316P-1)</p>	
 <p>16 gauge, 3 1/2" center waste (SL2424/316-1) 1 1/2" rear waste also available</p>	 <p>18 gauge, 3 1/2" center waste (ART36/316-1)</p>	 <p>18 gauge 1 1/2" rear waste with rubber stopper (ART36/316-3C)</p>	 <p>18 gauge, 3 1/2" center waste (LBSDBL6810/316P-1) (LBSDBR6810/316P-1 inset)</p>
 <p>20 gauge, 1 1/2" integral waste (OC6/316) (RC6/316 inset)</p>	 <p>18 gauge, faucet ledge, 1 1/2" waste with rubber stopper (WHB1617/316-3)</p>	 <p>18 gauge, 1 1/2" waste with rubber stopper, integral shroud (WHBS181910/316-3)</p>	

Some models with 3 1/2" waste are also available with 1 1/2" waste assembly including rubber stopper
Some models with 1 1/2" waste are also available with 3 1/2" waste assembly including strainer
Some models with same waste configurations are also available in different sizes











Single Topmount Commercial Sink Range

			
20 gauge no ledge, 3-1/2" center waste (S9106-1)	20 gauge no ledge, 1-1/2" center waste (S9106-3)	20 gauge no ledge, 3-1/2" rear waste (S4206-1)	
			 
20 gauge ledgeback, 3-1/2" center waste (ZLBS9106-1)	20 gauge ledgeback, 1-1/2" center waste (ZLBS9106-3)	20 gauge ledgeback, 3-1/2" rear waste with overflow (ZLBS6807-2)	20 gauge ledgeback, 3-1/2" rear waste, (ZALBS6405-1)
			
	18 gauge no ledge, 3-1/2" waste, hand fab (S7314P-1)	18 gauge no ledge, 3-1/2" rear waste (S7310P-1)	18 gauge no ledge, 3-1/2" rear waste (AS6105P-1)
			 
18 gauge ledgeback, 3-1/2" center waste (ZLBS9408P-1)	18 gauge ledgeback, 3-1/2" center waste, with drain lines (LBS7314P-1)	18 gauge ledgeback, 3 1/2" center back waste (ZALBS4405P-1)	18 gauge ledgeback, 3-1/2" waste (ZALBS2705P-1)

Some models available with either 3 1/2" (-1 models) or 1 1/2" (-3 models) waste assembly.
Some models with same waste configurations are also available in different sizes

Product Matrix




Double Topmount Commercial Sink Range

 <p>20 gauge no ledge, 3-1/2" center waste (D1906-1 shown)</p>	 <p>20 gauge no ledge, 3-1/2" waste (D6408-1 shown)</p>		
 <p>20 gauge ledgeback, 3-1/2" rear waste (ZLBD6407-1 shown)</p>	 <p>20 gauge ledgeback, 3-1/2" rear waste (ZALBD6405-1 shown)**</p>		
 <p>18 gauge no ledge, 3-1/2" waste (D6410PCB-1 shown)</p>	 <p>18 gauge no ledge, 3 1/2" center waste, drainage lines (D0814P-1)</p>		
 <p>18 gauge ledgeback, 3-1/2" center waste (ZALBD1305P-1 shown) *</p>	 <p>18 gauge ledgeback, 3-1/2" center waste (ZLBD1308P-1 shown)</p>	 <p>18 gauge ledgeback, 3-1/2" center back waste, drainage lines (ZALBDC182605P-1 shown)</p>	 <p>18 gauge ledgeback, 3-1/2" center back waste (ZLBD4408P-1 shown) *</p>

* Additional models in same configuration available with deeper bowls

** As above but different corner shaping of bowls

Triple Topmount Commercial Sink Range

	
20 gauge no ledge, 3-1/2" center waste (T6410PCB-1)	20 gauge no ledge, 3-1/2" center waste (T8610-1)
	
20 gauge ledgeback, 3-1/2" rear waste (LBT6407CB-1)	
	
18 gauge no ledge, 3-1/2" waste rear (T6410PCB-1)	
	
18 gauge ledgeback, 3-1/2" center waste (LBT8610P-1)	18 gauge ledgeback, 3-1/2" rear waste (LBT6410PCB-1)

Product Matrix

Undermount Sink Range

			
<p>Wheelchair compliant single bowl (UCS6805P-1)</p>		<p>Center back waste (UCS6808P-1)</p>	
			
<p>Wheelchair compliant double bowl UCD6405P-1)</p>		<p>Center back waste (UCD6408P-1)</p>	

Hand Wash Basin Range

 <p>18 gauge no faucet ledge 1-1/2" center back waste No overflow (WHB1616-3)</p>	 <p>18 gauge, 1 1/2" rear waste (WHB1617-3) §, With overflow (WHB1617-6) § 1 1/4" rear waste (WHB1617-7) §</p>	 <p>18 gauge, 1 1/2" center waste, integral shroud (WHBS181910-3)</p>	 <p>18 gauge, 1 1/2" rear waste, integral shroud (WHBS161709-3)</p>
 <p>18 gauge, 1 1/4" rear waste (WT400/500/600 series)* §</p>	 <p>18 gauge, 1 1/4" rear grid waste No overflow (WHB2221-7) With overflow (WHB2221-8)</p>	 <p>19 gauge 1 1/4" center waste (WT310E-7)</p>	 <p>16 gauge, 1 1/4" pyramid grid waste (WHB5222-7)</p>
 <p>18 gauge, 1 1/2" waste, rubber stopper (FWHB1819-3)</p>	 <p>14 gauge 3 1/2" center waste wall mount (WSS6713)</p>	 <p>Miranit® composite, 2 sizes, wall mount (ANMW0011) §</p>	 <p>Miranit® composite, 2 - 4 wash stations (SANW++)</p>














* Also available with overflow

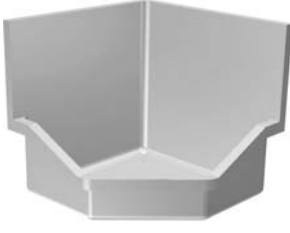§ Multiple sizes

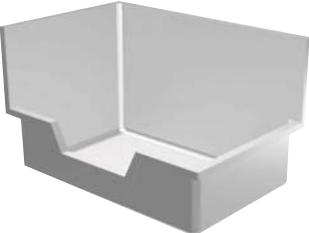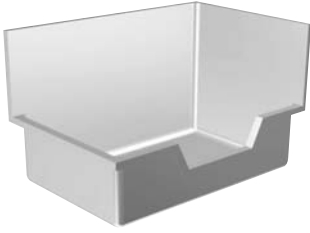~Some wheelchair accessible

Product Matrix

Utility Sink Range

 <p>Mop sink for left or right corner installation (FSS222210/316-1)</p>	 <p>Mop sink, angled front, corner installation (FSS2210/316-1)</p>	 <p>Mop sink, angled front, low access, corner installation (FSS02210/316-1)</p>	
 <p>Mop sink, splashguard left & rear (FSSL223410/316-1)</p>	 <p>Mop sink, splashguard right & rear (FSSR223410/316-1)</p>	 <p>Mop sink, low access, splashguard left & rear (FSSOL223410/316-1)</p>	 <p>Mop sink, low access, splashguard rear and right (FSSOR223410/316-1)</p>
 <p>Sewage sampling sink (SSS1827)</p>	 <p>Sewage sampling sink with drainboard left (SSS1827SDSL)</p>	 <p>Sewage sampling sink with drainboard right (SSS1827SDSR)</p>	 <p>Sewage sampling sink, drainboards left & right (SSS1827DDS)</p>
 <p>16 gauge WTS series trough sink (WTS48-1)</p>	 <p>14 gauge WTS series trough sink (WTS2025-1)</p>		

Drainboard Sink Range



Single center back waste
(LBSDBL6408P-1)



Single center back waste
(LBSDBR6408P-)



Single center waste
(LBSDBL6810P-1)



Single center waste
(LBSDBR6810P-1)























Double center back waste
(LBDDBL6408P-1)



Double drainboard right
(LBDDBR6408P-1)

Product Matrix

Scullery Sink Range

CLASSIC SERIES  Radius covered bowl corners on front and back	 Classic Series, 16 gauge SL/DL/TL	 Classic Series, 16 gauge SL/DL/TL	 Classic Series, 16 gauge SL/DL/TL	 Drainboard for Classic Series
SERVICE SERIES  Fully welded square cove construction	 Service Series SSL/SDL/STL Without drainboard	 Service Series SSL/SDL/STL Drainboard left	 Service Series SSL/SDL/STL Drainboard right	 Service Series SSL/SDL/STL Drainboards left and right
RESTAURANT SERIES  Identical radius covered bowl corners all around	 Restaurant Series RSL/RDL/RTL Without drainboard	 Restaurant Series RSL/RDL/RTL Drainboard left	 Restaurant Series RSL/RDL/RTL Drainboard right	 Restaurant Series RSL/RDL/RTL Drainboards left and right
WORLD CLASS SERIES  Coved corners all around same as restaurant but heavier 14 gauge	 World Class Series WSL/WDL/WTL Without drainboard	 World Class Series WSL/WDL/WTL Drainboard left	 World Class Series WSL/WDL/WTL Drainboard right	 World Class Series WSL/WDL/WTL Drainboards left and right

All sculleries, except Classic Doubles, are offered in 2 bowl sizes

Sacrarium Sink Range



20 gauge, rectangular sink, 3 1/2" waste assembly
(SS9126)



18 gauge, round sink, 1 1/2" waste assembly
(RS14)

Urinal and Toilet Range



16 gauge urinal, with 1/2" spreader
(CMPX538)



16 gauge stainless, FIPT rear spud
(HDWC2414-FM-R)



16 gauge stainless, FIPT top spud
(HDWC2514-FM-T)

Product Matrix

Washroom Accessory Range

 <p>EXOS 18 gauge folded paper towel dispenser (EXOS600B, EXOS600W)</p>	 <p>EXOS 18 gauge large waste bin (EXOS605B, EXOS605W)</p>	 <p>EXOS 18 gauge foam soap dispenser (EXOS616B, EXOS616W)</p>	 <p>EXOS 18 gauge liquid soap dispenser (EXOS618B, EXOS618W)</p>
 <p>EXOS 18 gauge electronic soap dispenser (EXOS625B, EXOS625W)</p>	 <p>EXOS 18 gauge rolled paper towel dispenser (EXOS637B, EXOS637W)</p>	 <p>RODAN 22 gauge electronic paper towel dispenser (RODX630)</p>	 <p>RODAN 22 gauge soap or lotion dispenser (RODX618)</p>
 <p>RODAN 22 gauge double toilet paper dispenser (RODX672)</p>	 <p>Rodan 22 gauge sanitary/towel waste bin (RODX611 left/RODX605 right)</p>	 <p>Rodan 22 gauge towel dispenser/waste bin (RODX602)</p>	 <p>Counter mount soap dispenser (SD80V & SD80V-EXT)</p>
	 <p>Shower accessories (CH01, CH02, CV++, CR++)</p>	 <p>Other stainless accessories (STRX692, STRX694, CM-16104)</p>	



1047

1047

INTEGRAL WASTE ASSEMBLY

Integral waste assembly. Complete with T316 shank, shank gasket, brass shank nut, brass tailpiece nut and nylon tailpiece gasket. For 1-1/2" (38 mm) wastes.



1130B

1130B

3 1/2" STAINLESS STRAINER BASKETS

3 1/2" (89 mm) stainless steel strainer basket for 1130 strainer.

3 1/2" (89 mm) stainless steel pull up strainer basket for 1140 strainer.

NEW

1140B

3 1/2" WASTE ASSEMBLY

Type 316 (EN1.4401 17/12/2) stainless steel strainer and tailpiece, for enhanced corrosion resistance.

1120/316



1120/316

3 1/2" (89 mm) all metal basket strainer. T304 stainless steel construction complete with 1-1/2 x 3" (38 x 76 mm) brass tailpiece. Pull up crumb cup. Certified to ASME A112.18.2-2005/CSA B125.2-2005.

1140

Case lot of 60 pieces, stainless steel strainer assemblies, 3 1/2" crumb cup, with tailpieces.

1140/60



1140

3-1/2" VANDAL RESISTANT GRID STRAINERS

Type 316 (EN1.4401 17/12/2) stainless steel grid strainer and tailpiece, for enhanced corrosion resistance.

1200/316G

Type 302 stainless steel grid strainer.

1300G

1 1/2" WASTE

1-1/2" (38 mm) DN38 duplex waste complete with 1-1/2 x 3" (38 mm x 76 mm) brass tailpiece.

100

1 1/2" (38 mm) duplex waste fitting, type 316 (EN1.4401 17/12/2) stainless steel, complete with 1 1/2" (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece and rubber stopper.

200/316



100
200/316



100-1/302

100-1/302

SPECIALITY WASTE FITTING

Stainless steel pyramid shaped waste for WHB5222 basin.

WHB5222-PW



WHB5222-PW



100-NR
200/316-NR

1 1/2" VANDAL RESISTANT GRID

1 1/2" (38 mm) vandal resistant waste fitting, type 302 (CNS 18/8) stainless steel, complete with 1-1/2 x 3" (DN38, 76.2 mm) brass tailpiece.

100-NR

1 1/2" (38 mm) waste fitting, type 316 (EN1.4401 17/12/2) stainless steel, complete with 1 1/2" (DN38) type 316 (EN1.4401 17/12/2) stainless steel tailpiece.

200/316-NR



125GOWK

1 1/4" WASTE FITTINGS

1 1/4" (32 mm) grid strainer with removable tailpiece. ASME A112.18.2-2005/CSA B125.2-2005.

No overflow

125GWK

for WHB5222-7 only

125GWK-MOD

310-1
312-1



STANDPIPE

Standpipe for 1 1/2" (38mm) wastes. Type 304 18/10 stainless steel.

10" (254 mm) long

310-1

12" (304 mm) long

312-1



315-7

TAILPIECE LOCKNUT

Brass locknut.

315-7



315-8

TAILPIECE GASKET

Nylon gasket for 1 1/2" (38 mm) tailpiece.

315-8



315-9/316

WASTE FITTING

1 1/2 x 3" (38 x 76 mm) type 316 stainless steel tailpiece.

315-9/316



21020

CHROME FINISH OVERFLOW ELBOW

2 5/8 x 1 1/4" (67 x 32 mm) elbow with flat washer for WT400C-8, WT500C-8, WT600C-8, OV1420U/5, OV1619/5, OV1317U/5, OV1418/6, OV17/5, OV17/6.

21020



21021

CHROME FINISH OVERFLOW COLLAR

3 3/16 x 2 1/8" (81 x 54 mm) collar made for WT400C-8, WT500C-8, WT600C-8, OV1420U/5, OV1619/5, OV1317U/5, OV1418/6, OV17/5, OV17/6.

21021



21750

OVERFLOW TUBE

Stainless steel overflow tube

7.5" for OV17/5, WT400C-8, WT500C-8, and WT600C-8.

21750

Index

100.....	115	AS6105P-1.....	47	HWS-RS-00.....	24	RODX618.....	93	SD80V-EXT.....	95
1047.....	115	AWHB1414P-00.....	24	HWSS1518P-00.....	25	RODX618E.....	94	SDL2436-1.....	79
1140.....	115			HWSS2321W-00.....	16	RODX619.....	94	SDL2436L-1.....	79
21020.....	115	C				RODX619E.....	95	SDL2436LR-1.....	79
21021.....	115	CH-01.....	100	I		RODX625.....	94	SDL2436R-1.....	79
21750.....	115	CH-02.....	100	IWC2104.....	17	RODX630.....	89	SDL2448-1.....	79
100-1/302.....	115	CL-DB.....	77	L		RODX672.....	96	SDL2448L-1.....	79
100-NR.....	115	CM-16104.....	98			RODX672E.....	96	SDL2448LR-1.....	79
1120/316.....	115	CM-16104-WM.....	99	LBD0814P-1.....	53	RS14.....	87	SDL2448R-1.....	79
1130B.....	115	CMPX538.....	88	LBD7412P-1.....	53	RSL2418-1.....	81	SL2424/316-1.....	45
1140/60.....	115	CR-36.....	99	LBDDBL6408P-1.....	75	RSL2418L-1.....	81	SL2424/316-5.....	45
1140B.....	115	CR-48.....	99	LBDDBR6408P-1.....	75	RSL2418LR-1.....	81	SL2424-1.....	76
1200/316G.....	115	CR-60.....	99	LBLRS7008P-1.....	33	RSL2418R-1.....	81	SL2424-5.....	76
125GWK.....	115	CR-72.....	99	LBLS4608P-1.....	31	RSL2424-1.....	81	SL2448/316-1.....	45
125GWK-MOD.....	115	CV-00.....	101	LBLS6408P-1.....	31	RSL2424L-1.....	81	SL2448/316-5.....	45
1300G.....	115	CV-01.....	101	LBLS7008P-1.....	31	RSL2424LR-1.....	81	SL2448-1.....	76
200/316.....	115	CV-02.....	101	LBRS4608P-1.....	32	RSL2424R-1.....	81	SL2448-5.....	76
200/316-NR.....	115			LBRS7008P-1.....	32	RTL2454-1.....	83	SS9126.....	87
310-1.....	115	D		LBS7314P-1.....	50	RTL2454L-1.....	83	SSL2418-1.....	78
312-1.....	115	D0814P-1.....	51	LBS8014P-1.....	50	RTL2454LR-1.....	83	SSL2418L-1.....	78
315-7.....	115	D1906-1.....	51	LBSDBL6408P-1.....	74	RTL2454R-1.....	83	SSL2418LR-1.....	78
315-8.....	115	D6408-1.....	51	LBSDBL6810/316P-1.....	42	RTL2472-1.....	83	SSL2418R-1.....	78
315-9/316.....	115	D6410/316PCB-1.....	41	LBSDBL6810P-1.....	74	RTL2472L-1.....	83	SSL2424-1.....	78
		D6410PCB-1.....	51	LBSDBR6408P-1.....	74	RTL2472LR-1.....	83	SSL2424L-1.....	78
A		D8610-1.....	51	LBSDBR6810/316P-1.....	42	RTL2472R-1.....	83	SSL2424LR-1.....	78
AC01-005.....	17	DL2448-1.....	76	LBSDBR6810P-1.....	75			SSL2424R-1.....	78
ALBLSR7005P-1.....	33	DL2448-5.....	76	LBT6407CB-1.....	55	S		SSS1827.....	71
ALBLSR7006P-1.....	33			LBT6410PCB-1.....	55	S4206-1.....	46	SSS1827DDS.....	72
ALBLS4605P-1.....	31	E		LBT8610P-1.....	55	S6108P-1.....	47	SSS1827SDSL.....	72
ALBLS4606P-1.....	31	ESD80BOTTLE1.....	95	LHS4608P-1.....	34	S6407/316P-1.....	37	SSS1827SDSR.....	72
ALBLS6406P-1.....	31	EXOS600B.....	91	LHS6408P-1.....	34	S6408-1.....	46	SSU1-00.....	22
ALBLS7005P-1.....	31	EXOS600W.....	91	LHS7308P-1.....	34	S6410/316PCB-1.....	37	SSU1-10.....	22
ALBLS7006P-1.....	31	EXOS605B.....	96	LHS8608P-1.....	34	S6410PCB-1.....	47	SSU1-11.....	22
ALBRS4605P-1.....	32	EXOS605W.....	96	LRS4608P-1.....	35	S6808/316P-1.....	37	SSU1-20.....	22
ALBRS4606P-1.....	32	EXOS616B.....	92			S6808-1.....	46	SSU1-2016-00.....	21
ALBRS7005P-1.....	32	EXOS616W.....	92	M		S6810/316P-1.....	37	SSU1-2020-00.....	21
ALBRS7006P-1.....	32	EXOS618B.....	93	MEDI-SHR.....	17	S6810/316P-3.....	37	SSU2-00.....	22
ALHS4605P-1.....	34	EXOS618W.....	93	MIX-LF.....	17	S6810-1.....	46	SSU2-10.....	22
ALHS4606P-1.....	34	EXOS625B.....	92	O		S7308-1.....	46	SSU2-11.....	22
ALHS6405P-1.....	34	EXOS625W.....	92			S7310P-1.....	47	SSU2-20.....	22
ALHS6406P-1.....	34	EXOS637B.....	91	OC6/316.....	42	S7312P-1.....	47	SSU2-2040-00.....	21
ALHS7305P-1.....	34	EXOS637W.....	91			S7314P-1.....	47	SSU3-00.....	23
ALHS7306P-1.....	34	F		R		S8014P-1.....	47	SSU3-10.....	23
ALHS8605P-1.....	34	FSS2210/316-1.....	70	RC6/316.....	43	S9106/316P-1.....	37	SSU3-11.....	23
ALHS8606P-1.....	34	FSS222210/316-1.....	70	RDL2436-1.....	82	S9106/316P-3.....	37	SSU3-20.....	23
ALRS4605P-1.....	35	FSS222310/316-1.....	70	RDL2436L-1.....	82	S9106-1.....	46	SSU-BS.....	23
ALRS4606P-1.....	35	FSSL223410/316-1.....	70	RDL2436LR-1.....	82	S9106-3.....	46	STL2454-1.....	80
ANMW0010.....	58	FSSO2210/316-1.....	70	RDL2436R-1.....	82	S9407/316P-1.....	37	STL2454L-1.....	80
ANMW0011.....	58	FSSOL223410/316-1.....	71	RDL2448-1.....	82	S9407/316P-3.....	37	STL2454LR-1.....	80
ART36/316-1.....	44	FSSOR223410/316-1.....	71	RDL2448L-1.....	82	S9407-1.....	46	STL2454R-1.....	80
ART36/316-3C.....	44	FSSR223410/316-1.....	71	RDL2448LR-1.....	82	SANW200.....	28	STL2472-1.....	80
ART36-1.....	36	FWHB1819-3.....	63	RDL2448R-1.....	82	SANW200.....	67	STL2472L-1.....	80
ART36-3C.....	36			RODX600.....	89	SANW205.....	29	STL2472LR-1.....	80
ART48/316-1.....	44	H		RODX600E.....	90	SANW205.....	68	STL2472R-1.....	80
ART48/316-3C.....	44	HDWC2414-FM-R.....	88	RODX600ME.....	90	SANW211.....	30	STRX692.....	101
ART48-1.....	36	HDWC2514-FM-T.....	88	RODX602.....	98	SANW211.....	68	STRX694.....	101
ART48-3C.....	36	HWF41.....	18	RODX602E.....	98	SANW212.....	30		
ART60/316-1.....	44	HWS0610P-3.....	27	RODX605.....	97	SANW212.....	69	T	
ART60/316-3C.....	44	HWS1414P-00.....	25	RODX605E.....	97	SANW215.....	29	T6410PCB-1.....	54
ART60-1.....	36	HWS1420P-00.....	26	RODX611.....	97	SANW215.....	67	T8610-1.....	54
ART60-3C.....	36	HWS6810P-3.....	27	RODX616.....	93	SD80V.....	95	TL2454-1.....	77

Index

TL2454-1	77
TL2454-5	77
TL2472-1	77
TL2472-5	77

U

UCD6405P-1	57
UCD6408P-1	57
UCS4608/316P-1	40
UCS4610/316P-1	40
UCS6105P-1	56
UCS6805P-1	56
UCS6808/316P-1	40
UCS6808P-1	56
UCS6810/316P-1	40

V

VR01-037	20
VR01-054	20
VR01-055	20
VR01-068	20
VR01-069	20
VR01-090	19
VR01-091	19

W

WDL2436-1	85
WDL2436L-1	85
WDL2436LR-1	85
WDL2436R-1	85
WDL2448-1	85
WDL2448L-1	85
WDL2448LR-1	85
WDL2448R-1	85
WHB1616-3	59
WHB1617/316-3	43
WHB1617-3	59
WHB1617-6	59
WHB1617-7	60
WHB1819/316-3	43
WHB1819-3	60
WHB1819-6	60
WHB1819-7	60
WHB2221-7	61
WHB2221-8	62
WHB2221-RS	63
WHB2221-UC	63
WHB5222-7	62
WHB5222-PW	115
WHB5222-RS	63
WHBS181910-3	61
WSL2418-1	84
WSL2418L-1	84
WSL2418LR-1	84
WSL2418R-1	84
WSL2424-1	84
WSL2424L-1	84
WSL2424LR-1	84
WSL2424R-1	84
WSS6713	66
WT310E-7	64

WT400C-7	64
WT400C-8	64
WT500C-7	65
WT500C-8	65
WT600C-7	65
WT600C-8	66
WTL2454-1	86
WTL2454L-1	86
WTL2454LR-1	86
WTL2454R-1	86
WTL2472-1	86
WTL2472L-1	86
WTL2472LR-1	86
WTL2472R-1	86
WT-RS	66
WTS2025-1	73
WTS2031-1	73
WTS2036-1	73
WTS2048-1	73
WTS2060-1	73
WTS2072-1	73
WTS2096-1	73
WTS36-1	73
WTS48-1	73
WTS60-1	73
WTS72-1	73

Z

ZALBD1305P-1	53
ZALBD1306P-1	53
ZALBD4405P-1	53
ZALBD4406P-1	53
ZALBD6405-1	52
ZALBD6405P-1	53
ZALBD6406P-1	53
ZALBD7505P-1	53
ZALBD7506P-1	53
ZALBDC182605P-1	53
ZALBS1305P-1	49
ZALBS1306P-1	49
ZALBS2705P-1	49
ZALBS2706P-1	49
ZALBS4005P-1	50
ZALBS4006P-1	50
ZALBS4405P-1	49
ZALBS4406P-1	49
ZALBS4605P-1	49
ZALBS4606P-1	49
ZALBS6105P-1	50
ZALBS6106P-1	50
ZALBS6405-1	48
ZALBS6405P-1	50
ZALBS6406P-1	50
ZALBS6805/316P-1	39
ZALBS6805-1	48
ZALBS6805P-1	50
ZALBS6806P-1	50
ZALBS7005P-1	50
ZALBS7006P-1	50
ZALBS7305P-1	50
ZALBS7306P-1	50

ZALBS7505P-1	50
ZALBS7506P-1	50
ZALBS7805P-1	50
ZALBS7806P-1	50
ZALBS9405P-1	49
ZALBS9406P-1	49
ZLBD1308P-1	53
ZLBD4408P-1	53
ZLBD4410P-1	53
ZLBD6407-1	52
ZLBD6408/316P-1	41
ZLBD6408-1	52
ZLBD6408P-1	53
ZLBD6410/316PCB-1	41
ZLBD6410PCB-1	53
ZLBD6808-1	52
ZLBD7508-1	52
ZLBD7508P-1	53
ZLBD7510P-1	53
ZLBS1306-1	48
ZLBS1308P-1	49
ZLBS2708-1	48
ZLBS2708P-1	49
ZLBS4008P-1	50
ZLBS4010P-1	50
ZLBS4408P-1	49
ZLBS4410P-1	49
ZLBS4607/316P-1	38
ZLBS4607-1	48
ZLBS4608P-1	49
ZLBS4610/316P-1	38
ZLBS4610/316PC-3	38
ZLBS4610P-1	49
ZLBS6108P-1	50
ZLBS6110P-1	50
ZLBS6407/316P-1	39
ZLBS6408P-1	50
ZLBS6410PCB-1	50
ZLBS6807/316P-1	39
ZLBS6807-1	48
ZLBS6807-2	48
ZLBS6808/316P-1	39
ZLBS6808-1	48
ZLBS6808-2	48
ZLBS6808P-1	50
ZLBS6810/316P-1	38
ZLBS6810/316P-3	39
ZLBS6810-1	48
ZLBS6810P-1	50
ZLBS7008P-1	50
ZLBS7010P-1	50
ZLBS7308-1	48
ZLBS7308P-1	50
ZLBS7310P-1	50
ZLBS7312P-1	50
ZLBS7508-1	48
ZLBS7508P-1	50
ZLBS7510P-1	50
ZLBS7808P-1	50
ZLBS9106-1	48
ZLBS9106-3	48

ZLBS9407/316P-1	38
ZLBS9407/316P-3	38
ZLBS9407-1	48
ZLBS9407-3	48
ZLBS9408P-1	49

(TEL) 1-855-526-0503

(FAX) 1-866-440-2250

commercial-info.us@franke.com



Franke Kindred Canada Ltd.
1000 Franke Kindred Road
Midland, ON L4R 4K9
Canada

Changes in dimensions,
construction and models
reserved.
Printed in Canada.

Effective
Feb 01, 2018

#62000
07/18 REV-1

For Commercial Products
In USA:

Tel 1-855-526-0503
Fax 1-866-440-2250
commercial-info.us@franke.com
www.franke-commercial.com

