

Sewerooter T-3™

For Inside Jobs; with a 100 Foot Capacity

The Sewerooter T-3 combines large capacity with great portability. The drum holds 100 ft. of 1/2" cable, which is fed into the line with a smooth-operating variable speed Power Cable Feed attachment. The machine rolls on big 10" wheels, has a tough but lightweight tubular frame, and a tall folding handle with a truck loading wheel that makes it easy to move around. And the passive brake holds the machine in position on the job or in your truck.

Other important features include a quickly removable drum and a 1/3 hp motor with capacitor. Like all General's floor models, the Sewerooter T-3 offers you the safety of a fully grounded electrical circuit, a pneumatic foot pedal and reverse switch with an "Off" position, plus a Ground Fault Circuit Interrupter.



Flexicore® Cable **Wire Rope Center Construction**



Heavy-gauge wire coiled tightly around 49-strand aircraft-type wire rope and heat treated. Has unequalled strength and the right amount of flexibility. So tough it carries a one-year warranty against defect or breakage.

Flexicore Patent Nos. 2,244,735 and 2,849,870

General
PIPE CLEANERS
www.drainbrain.com

The toughest tools down the line.™



Sewerooter T-3™

For Inside Jobs; with a 100 Foot Capacity




Power Cable Feed

The Sewerooter T-3's power cable feed is a real labor saver. It enables you to vary feeding speed in and out of a line more easily than you could manually and also gives you better control when working through tough stoppages. In addition, you can reverse instantly if you hit an obstruction. The power cable feed drives 1/2" and 3/8" cables.



Folding Handle

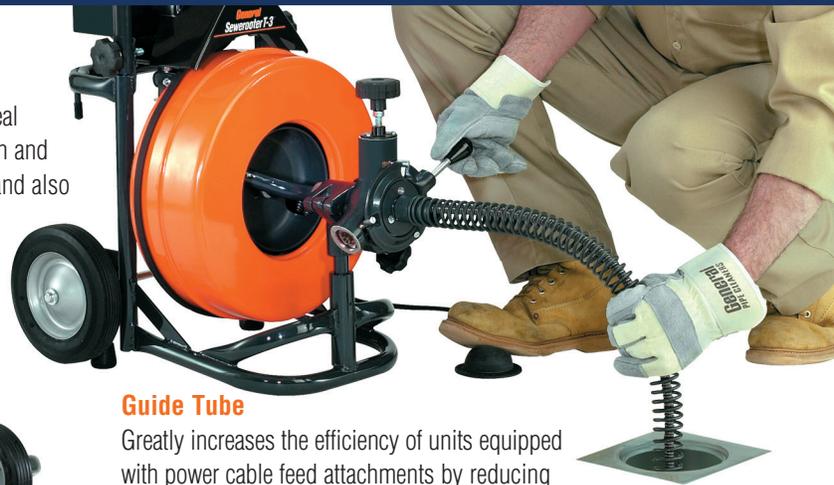

Guide Tube

Greatly increases the efficiency of units equipped with power cable feed attachments by reducing cable whipping and drag. In addition, when it's difficult to get the machine close to the drain opening, a Cable Guide Tube and extension can literally take you out of the hole. Tube is about 30" long and 1" in diameter. Five foot extensions are made of rigid conduit with a flexible end.

Specifications:

Weight:

61 lbs. (28 kg) less cable.

Overall Height:

37" (94 cm); 25" (54 cm) with handle folded down.

Drum:

Equipped with inner drum and guide tube to prevent cable tangling under load. Cable can be driven or retracted from line while cable is rotating. Quickly removable from frame.

Capacity:

100 ft. (30 m) of 1/2" (12.7 mm) Flexicore wire rope center cable. Use 1/2" cable for 3" – 4" lines; 3/8" cable for 2" – 3" lines.

Motor:

1/3 hp heavy duty, capacitor-type with reverse.

Load Speed:

167 rpm.

Wheels:

10" semi-pneumatic tires with oilite bronze bushings. Passive brake locks wheels during operation.

Foot Switch:

Pneumatic, with no electrical contact between pedal and motor.

Power Cord:

20 ft. 3-wire. In-line Ground Fault Circuit Interrupter.

Bearings:

Oilite bronze.

Power Cable Feed:

Feeds and retracts cable at variable speed by moving control handle up or down.

Leather Gloves:

With double-reinforced palm, for hand protection when guiding cable.

Standard T-3 Cutter Set:

Flexible Leader, Arrow Head, 1-1/2" U-Cutter, 2" Side Cutter Blades, 3" Side Cutter Blades, 4" Side Cutter Blades, 3" Rotary Saw Blades, and Retrieving Tool.

Cables:

1/2" diameter for 3" – 4" lines (Not for roots.)
3/8" diameter for 2" – 3" lines.



General General Wire Spring Co.
PIPE CLEANERS
McKees Rocks, PA 15136 USA
800-245-6200 or 412-771-6300