

2-IN-1 DOUBLE-WALL OIL TANKS

# RELIABILITY, EXCEPTIONAL SAFETY AND OPTIMAL SPACE UTILIZATION



# WITH SECONDARY CONTAINMENT



A COMPLEMENT TO OUR TANK SERIES, THIS LINE OFFERS PEACE OF MIND AND TROUBLE-FREE INSTALLATION.







UL 2258 / ULC/ORD-C80.1





Fluorination is used to make specific modifications to the surface properties of plastics such as wettability and permeation resistance. It is a process that has been used in the automotive industry for more than ten years as a way of reducing the permeation of fuel vapors from the tanks of motor vehicles.




FOR MORE INFORMATION, PLEASE CONTACT OUR MAIN OFFICE AT:

1020 André-Liné Street Granby, Quebec J2J 1J9 Canada 1-800-839-2070 sales@granbyindustries.com

## GENERAL CHARACTERISTICS


### 2-in-1 double-wall oil tanks

- Primary tank made of blow-molded high-density polyethylene (HDPE)
- Internal tank is fluorination treated for odor and chemical resistance, which is unique to the Granby 2-in-1 tanks\*
- Secondary containment made of galvanized steel on both sides, tightly welded and edged using state-of-the-art manufacturing equipment
- Visual leak indicator for the monitoring of the integrity of the primary tank
- Connection fittings made of cast aluminum for greater torque resistance and greater peripheral sealing
- Rugged floor stand made entirely of galvanized steel
- Tanks come completely equipped from factory with necessary installation accessories
  - 2" NPT galvanized steel fill pipe adaptor
  - Low-pressure vent and overfill protection alarm
  - Oil level gauge
  - Oil burner supply duplex bushing with tube adaptors
- Optimal space utilization
- Suited for basements with headrooms as low as 60"
- Ease in maneuverability and access through narrow doorways only 28" wide
- · Easy carrying due to light weight and welded handles
- 30-year limited warranty
- B100 bio-fuel ready
- · Optional rain cover mandatory for outdoor installation



#### SPECIFICATIONS

Product No.	Capacity L / USG / IMPG	Weight (lb. / kg)	A (in.)	B (in.)	C (in.)
961225	720 / 190 / 158	150/68	46 1/4	43 1/8	27 1/2
961226	1000 / 265 / 220	185/84	62	43 1/8	27 1/2

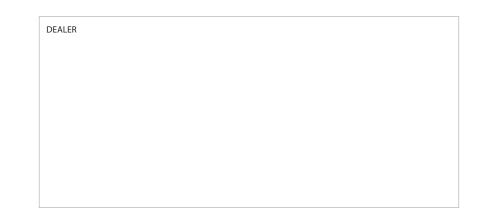

2-in-1 double wall oil tanks CAN/ENG - 08/15