

Enhancing everyday living







## **ENGINEERING SUBMITTAL DATA SHEET**


Side entry point of use electric compact water heaters


## 112SEO MODELS

10 imperial gallons / 45 litres insulated with 1" fiberglass

These models meet or exceed the safety and construction requirements of CSA 22.2 Standard

Models	Sto US gal.	rage Cap	oacity Imp. gal.	Input	Voltage	Diameter (A)	Height (B) In. (cm)	C In. (cm)	D	Е	F In. (cm)	G In. (cm)	Plumbing connections	Est. ship. wt.
112SE0-1R5M	12	45	10	1,500 W	120 V	16 (41)	22% (57)	2% (7)	45°	45°	16% (42)	151/4 (39)	3/4" NPT	52 (24)
112SE0-3R5M	12	45	10	3,000 W/2,250 W	240 V/208 V	16 (41)	22% (57)	2% (7)	45°	45°	16% (42)	151/4 (39)	3/4" NPT	52 (24)



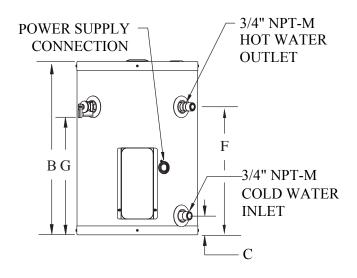

JOB TITLE	SUBMITTED DATE	SUBMITTED DATE						
ADDRESS	REQUIRED PRODUCT	REQUIRED PRODUCT						
	MODEL NO.	SIZE	QUANTITY					
CONTRACTOR	MODEL NO.	SIZE	QUANTITY					
ADDRESS	MODEL NO.	SIZE	QUANTITY					
	MODEL NO.	SIZE	QUANTITY					
ENGINEER	REQUIRED DATE	REQUIRED DATE						

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com

