

ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential natural & propane gas-fired water heaters

UG40 MODELS



33.3 imperial gallons / 40 U.S. gallons

insulated with 2" eco-friendly 

All models meet or exceed NRCAN energy efficiency requirements

Model	Storage Capacity			Type of gas	Input BTU	Recovery 90 °F / 50 °C			E. F. Number	Altitude	Est. ship. weight lb (kg)
	(US) gal	Litres	Imp. gal			(US) gal	Litres	Imp. gal			
UG40-32LF-P2U	40	151	33.3	LP	32,000	33.6	127	28.0	0.63	N & H	137 (62)
UG40-34LF-N2U	40	151	33.3	N	34,000	35.7	135	29.7	0.59	N & H	137 (62)
UG40-38LF-N2U	40	151	33.3	N	38,000	39.9	151	33.2	0.62	N	137 (62)

DIMENSIONS inches (cm)											
Model	A	B	C	D	E	F	G	H	I	J	K
All UG40	7 1/8 (18)	40 1/4 (102)	48 3/8 (123)	12 1/8 (31)	49 3/8 (126)	51 3/8 (131)	8 (20)	20 1/2 (52)	3 (8)	17.5°	90.0°

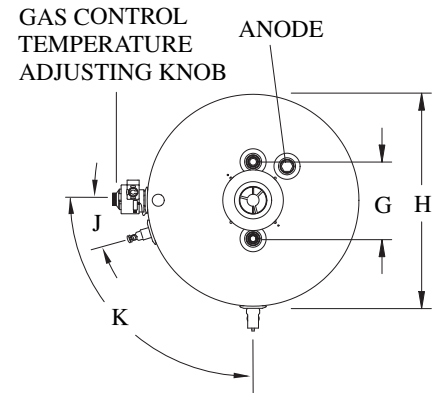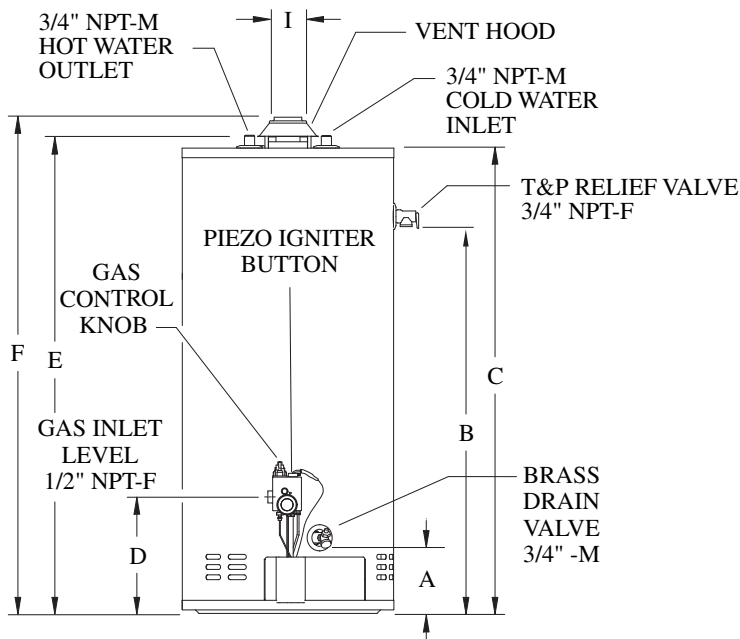

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO.	SIZE	QUANTITY
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

REQUIRED DATE _____