

Enhancing everyday living







ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential power direct vent natural gas-fired water heater

UG40 MODEL







This model meets the safety and construction requirements of CSA 4.1 Standard and meets or exceeds NRCan energy efficiency requirements

Model	(US) gal	Storage Capac	city Imp. gal	Type of gas	Input BTU	(US) gal	Recovery 90 °F	/ 50°C Imp. gal	E. F. Number	Altitu	de Est.	ship. weight
UG40-38TFPDV1-N2U	40	151	33	N	38,000	41.5	156.9	34.5	0.67	N &	Н	185 (84)
DIMENSIONS inches (cm)												
Model	Α	В	С	D	E	F	G	Н	I	J	К	L
UG40	9 ½ (24)	51 % (131)	60 (153)	14 1/4 (36)	61 1/16 (155)	69 % (177)	2-3 (5-7.6)	20 (51)	8 (20)	19.5°	90.0°	15¾ (40)

*Illustrated model (2")

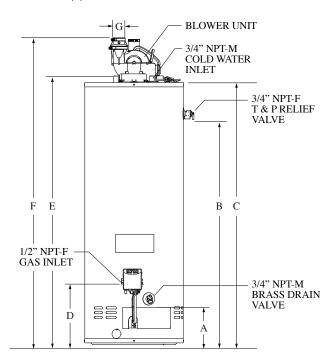



JOB TITLE	SUBMITTED DATE	SUBMITTED DATE					
ADDRESS	REQUIRED PRODUCT	REQUIRED PRODUCT					
	MODEL NO.	SIZE	QUANTITY				
CONTRACTOR	MODEL NO.	SIZE	QUANTITY				
ADDRESS	MODEL NO.	SIZE	QUANTITY				
	MODEL NO.	SIZE	QUANTITY				
ENGINEER	REQUIRED DATE	REQUIRED DATE					

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com

