



SPECIFICATIONS:

Light Output: 1400 LM/m (430 LM/ft.)
 Power: 14 Watts/m (4.3 Watts/ft.)
 Voltage: 12V
 Efficacy (Lumens per Watt): 100 LM/W
 Colour Accuracy (CRI): 80+
 Light Colour: 3000K Warm White
 Beam Angle: 120°
 Length: 16'-3" / 5m
 Width: 0-1/2" / 12mm
 Depth: 0-3/16" / 4mm
 Cuttable every 1" / 25mm
 Dimmable
 Waterproof IP67 (with sealed connections)
 50,000 Life Hours
 Included: 4 x Silicone End Caps per Roll

LIGHTING FACTS


HIGH DENSITY RIBBON

ITEM NO. GLF-HD-12V-30K-V2

Light Output (Lumens) **1400/M**
 Watts **14/M**
 Lumens per Watt (Efficacy) **100**

Colour Accuracy **80+**
 Colour Rendering Index (CRI)

Light Colour 3000K Warm White

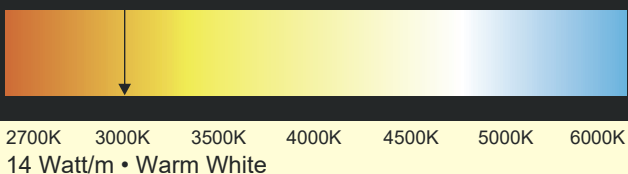

PHOTOMETRICS:

MOUNTING HEIGHT (FT.) CENTER BEAM FOOT CANDLES (FC) EDGE BEAM FOOT CANDLES (FC) BEAM AREA COVERED (FT.)

5 FT. 0.0 FC 0.0 FC 0'-0"

7 FT. 0.0 FC 0.0 FC 0'-0"

9 FT. 0.0 FC 0.0 FC 0'-0"

12 FT. 0.0 FC 0.0 FC 0'-0"

16 FT. 0.0 FC 0.0 FC 0'-0"

18 FT. 0.0 FC 0.0 FC 0'-0"

COMING SOON





HIGH DENSITY LED RIBBON

PART NUMBER: GLF-HD-12V-30K-V2

PRODUCT BENEFITS:

High density ribbon is perfect for many applications including kitchen undercounter, coves, niches, display cases/open shelving and more!

AVAILABLE ACCESSORIES:

12V Dimmable Drivers

25W • GLS-12025-TD
50W • GLS-12050-TD
100W • GLS-12100-TD
150W • GLS-12150-TD
200W • GLS-12200-TD

Quick Clip Feed

GLF-FEED

Quick Clip Flexible Joiner

GLF-FLEX

Aluminum Channels

Deep Recess • GLF-1201REC-1M
Deep Surface • GLF-1202SUR-1M
45° Angle • GLF-1203ANG-1M
Shallow Recess • GLF-1204RECS-1M
Shallow Surface • GLF-1205SURS-1M

Drywall Channel Lighting System

Chopstick Lighting System