

INTEGRATED LED GIMBAL **PART NUMBER: GLK-8A3-3040**



SPECIFICATIONS:

Light Output: 790 Lumens $\pm$ 10%
 Power: 8 Watts
 Efficacy (Lumens per Watt): 98.75 LM/W
 Colour Accuracy (CRI): 80+
 Light Colour: 3000K Warm White
 LED Chip Epistar
 Trim Size: 3" (Actual: 3.35"/85mm)
 Beam Angle: 36°
 Gimbal Angle: 30°
 Dimmable
 IC Rated
 Damp Location Rated
 35,000 Life Hours
 Power Supply (Driver) Included

LIGHTING FACTS

INTEGRATED LED GIMBAL

ITEM NO. GLK-8A3-3040

Light Output (Lumens) **790**
 Watts **8**
 Lumens per Watt (Efficacy) **98.75**

Colour Accuracy 80+
 Colour Rendering Index (CRI)

Light Colour 3000K Warm White



2700K 3000K 3500K 4000K 4500K 5000K 6000K
 8 Watt • Warm White

PHOTOMETRICS:

MOUNTING HEIGHT (FT.)	CENTER BEAM FOOT CANDLES (FC)	EDGE BEAM FOOT CANDLES (FC)	BEAM AREA COVERED (FT.)
4 FT.	63.0 FC	26.0 FC	2'-7"
6 FT.	28.0 FC	12.0 FC	3'-11"
8 FT.	15.0 FC	5.0 FC	5'-2"
10 FT.	11.0 FC	4.0 FC	6'-6"
12 FT.	7.0 FC	3.0 FC	7'-10"
14 FT.	5.0 FC	2.0 FC	9'-1"
16 FT.	4.0 FC	2.0 FC	10'-5"
18 FT.	3.0 FC	1.0 FC	11'-8"



ORDERING INFORMATION:

1. Select Trim Colour:


GLK-8A3-3040-

W - Matte White

B - Matte Black



PRODUCT DIMENSIONS:

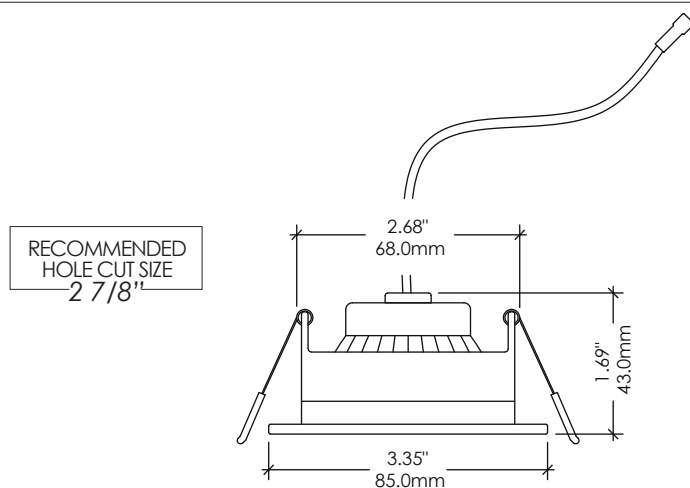

Power Supply (Driver) Size:
4-5/8" x 2-7/16" x 1-7/16"
(118mm x 62mm x 36mm)

ACCESSORIES:

Select Mount Plate for New Construction: **GL-MP3U**

