


INTEGRATED LED DOWNLIGHT **PART NUMBER: GL-10D4-DS-3036**

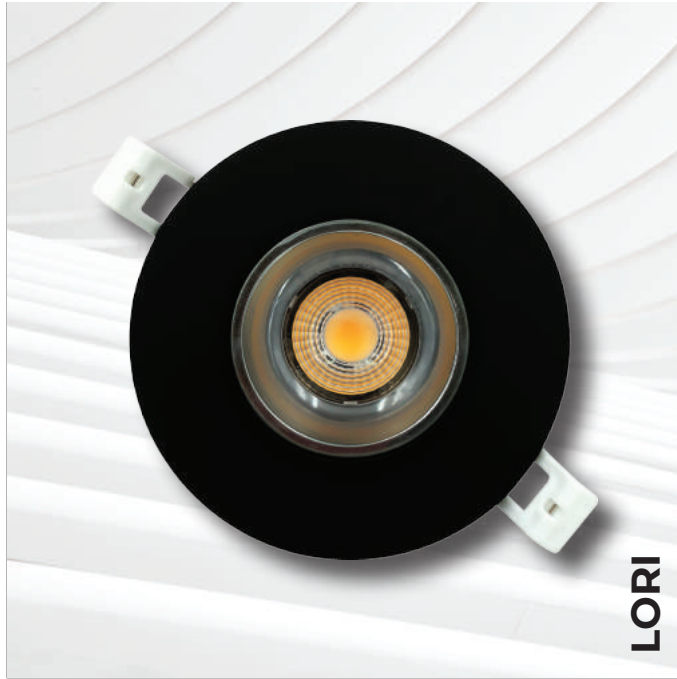

SPECIFICATIONS:

Light Output: 950 Lumens $\pm$ 10%
 Power: 10 Watts
 Efficacy (Lumens per Watt): 95 LM/W
 Colour Accuracy (CRI): 80+
 Light Colour: 3000K Warm White
 LED Chip Epistar
 Trim Size: 4" (Actual: 4.75"/121mm)
 Beam Angle: 36°
 Gimbal Angle: 0°
 Dimmable
 IC Rated
 Damp Location Rated
 50,000 Life Hours
 Power Supply (Driver) Included

LIGHTING FACTS **INTEGRATED LED DOWNLIGHT**

ITEM NO. GL-10D4-DS-3036

Light Output (Lumens) **950**
 Watts **10**
 Lumens per Watt (Efficacy) **95**

Colour Accuracy 80+
 Colour Rendering Index (CRI)

Light Colour 3000K Warm White



2700K 3000K 3500K 4000K 4500K 5000K 6000K
 10 Watt • Warm White

PHOTOMETRICS:

MOUNTING HEIGHT (FT.)	CENTER BEAM FOOT CANDLES (FC)	EDGE BEAM FOOT CANDLES (FC)	BEAM AREA COVERED (FT.)
4 FT.	96.0 FC	50.0 FC	2'-7"
6 FT.	46.0 FC	27.0 FC	3'-11"
8 FT.	26.0 FC	13.0 FC	5'-2"
10 FT.	17.0 FC	9.0 FC	6'-6"
12 FT.	12.0 FC	6.0 FC	7'-10"
14 FT.	9.0 FC	5.0 FC	9'-1"
16 FT.	7.0 FC	3.0 FC	10'-5"
18 FT.	5.0 FC	2.0 FC	11'-8"



INTEGRATED LED DOWNLIGHT

PART NUMBER: GL-10D4-DS-3036

ORDERING INFORMATION:

1. Select Reflector Colour:

GL-10D4-DS-3036-

CL - Clear Specular (Chrome)


BK - Black Specular

2. Select Trim Colour:


GL-4TR-DS-

WH - Matte White

BK - Matte Black

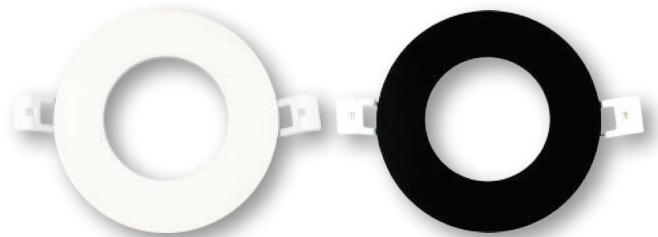

PRODUCT DIMENSIONS:

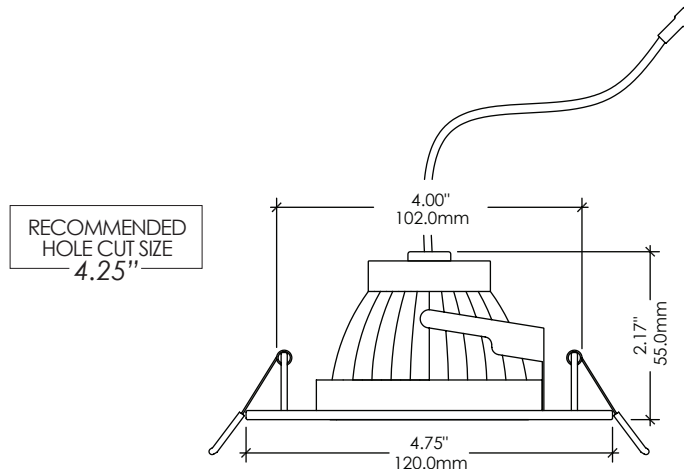

Power Supply (Driver) Size:

4-1/8" x 2-1/2" x 1-1/2"
(105mm x 64mm x 38mm)

ACCESSORIES:

Select Mount Plate for New Construction: **GL-MP4U**

