

INTEGRATED LED GIMBAL **PART NUMBER: GL-12A4-3036**



SPECIFICATIONS:

Light Output: 1100 Lumens $\pm$ 10%
 Power: 12 Watts
 Efficacy (Lumens per Watt): 91.6 LM/W
 Colour Accuracy (CRI): 80+
 Light Colour: 3000K Warm White
 LED Chip Epistar
 Trim Size: 4" (Actual: 4.88"/124 mm)
 Beam Angle: 36°
 Gimbal Angle: 30°
 Dimmable
 IC Rated
 Damp Location Rated
 35,000 Life Hours
 Power Supply (Driver) Included

LIGHTING FACTS

INTEGRATED LED GIMBAL

ITEM NO. **GL-12A4-3036**

Light Output (Lumens) **1100**
 Watts **12**
 Lumens per Watt (Efficacy) **91.6**

Colour Accuracy **80+**
 Colour Rendering Index (CRI)

Light Colour **3000K Warm White**



2700K 3000K 3500K 4000K 4500K 5000K 6000K
 12 Watt • Warm White

PHOTOMETRICS:

MOUNTING HEIGHT (FT.)	CENTER BEAM FOOT CANDLES (FC)	EDGE BEAM FOOT CANDLES (FC)	BEAM AREA COVERED (FT.)
4 FT.	93.0 FC	46.0 FC	2'-7"
6 FT.	46.0 FC	26.0 FC	3'-11"
8 FT.	25.0 FC	11.0 FC	5'-2"
10 FT.	16.0 FC	7.0 FC	6'-6"
12 FT.	12.0 FC	5.0 FC	7'-10"
14 FT.	9.0 FC	4.0 FC	9'-1"
16 FT.	6.0 FC	3.0 FC	10'-5"
18 FT.	5.0 FC	2.0 FC	11'-8"

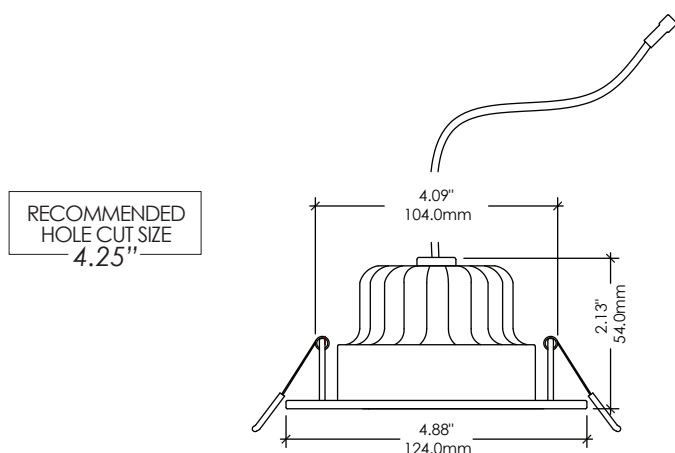


ORDERING INFORMATION:

1. Select Trim Colour:

GL-12A4-3036-
W - Matte White

B - Matte Black

PRODUCT DIMENSIONS:

Power Supply (Driver) Size:
4"-9/16" x 1"-3/8" x 2"-7/16"
(102mm x 35mm x 62mm)

ACCESSORIES:

Select Mount Plate for New Construction: **GL-MP4U**
