

INTEGRATED LED DOWNLIGHT **PART NUMBER: GL-15D4-3040-V2**



SPECIFICATIONS:

Light Output: 1300 Lumens $\pm$ 10%
 Power: 15 Watts
 Efficacy (Lumens per Watt): 86.6 LM/W
 Colour Accuracy (CRI): 80+
 Light Colour: 3000K Warm White
 LED Chip Epistar
 Trim Size: 4" (Actual: 4.57"/116 mm)
 Beam Angle: 40°
 Gimbal Angle: 30°
 Dimmable
 IC Rated
 Damp Location Rated
 25,000 Life Hours
 Power Supply (Driver) Included


LIGHTING FACTS **INTEGRATED LED DOWNLIGHT**

ITEM NO. GL-15D4-3040-V2

Light Output (Lumens) **1300**
 Watts **15**
 Lumens per Watt (Efficacy) **86.6**

Colour Accuracy 80+
 Colour Rendering Index (CRI)

Light Colour 3000K Warm White



2700K 3000K 3500K 4000K 4500K 5000K 6000K
 15 Watt • Warm White

PHOTOMETRICS:

MOUNTING HEIGHT (FT.)	CENTER BEAM FOOT CANDLES (FC)	EDGE BEAM FOOT CANDLES (FC)	BEAM AREA COVERED (FT.)
4 FT.	250.0 FC	36.0 FC	2'-11"
6 FT.	122.0 FC	13.0 FC	4'-4"
8 FT.	67.0 FC	8.0 FC	5'-10"
10 FT.	43.0 FC	5.2 FC	7'-3"
12 FT.	30.5 FC	4.5 FC	8'-9"
14 FT.	22.2 FC	3.8 FC	10'-2"
16 FT.	18.0 FC	2.2 FC	11'-8"
18 FT.	15.0 FC	2.0 FC	13'-1"



INTEGRATED LED DOWNLIGHT

PART NUMBER: GL-15D4-3040-V2

ORDERING INFORMATION:


1. Select Trim Colour:

GL-15D4-3040-V2

- WH** - Clear Specular (Chrome) with Matte White Trim
BK - Clear Specular (Chrome) with Matte Black Trim



PRODUCT DIMENSIONS:

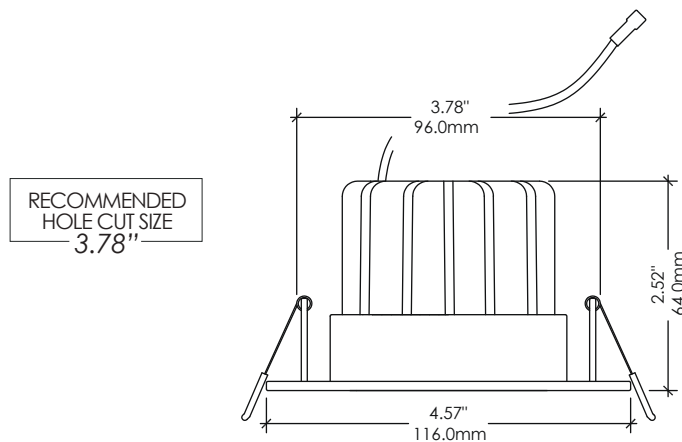

Power Supply (Driver) Size:
 4"-1/2" x 2"-7/16" x 1"-5/16"
 (114mm x 62mm x 35mm)

ACCESSORIES:

Select Mount Plate for New Construction: **GL-MP4D**

