



SPECIFICATIONS:

Light Output:
 Initial: 160 Lumens ± 10%
 Delivered: 130 Lumens ± 10%
 Power: 2 Watts 12V DC
 Efficacy (Lumens per Watt): 80 LM/W
 Colour Accuracy (CRI): 80+
 Light Colour: 3000K Vibrant Warm White
 Light Engine: Ø 1-1/16" / Ø 27mm
 Cut Out: Ø 1-3/8" / Ø 35mm
 Trim: (see next page for sizes)
 Beam Angle: 30°
 Dimmable
 IC Rated
 Wet Location Rated IP67 (Indoor/Outdoor)
 50,000 Life Hours

LIGHTING FACTS

MINI WELL

ITEM NO.	GL-2W1
Light Output (Lumens)	160
Watts	2
Lumens per Watt (Efficacy)	80
Colour Accuracy	80+
Colour Rendering Index (CRI)	
Light Colour	3000K Vibrant Warm White
2 Watt • Vibrant Warm White	

PHOTOMETRICS:

MOUNTING HEIGHT (FT.)	CENTER BEAM FOOT CANDLES (FC)	EDGE BEAM FOOT CANDLES (FC)	BEAM AREA COVERED (FT.)
5 FT.	0.0 FC	0.0 FC	0'-0"
7 FT.	0.0 FC	0.0 FC	0'-0"
9 FT.	0.0 FC	0.0 FC	0'-0"
12 FT.	0.0 FC	0.0 FC	0'-0"
16 FT.	0.0 FC	0.0 FC	0'-0"
18 FT.	0.0 FC	0.0 FC	0'-0"

COMING SOON



ORDERING INFORMATION:

Select Trim Style and Colour:

GL-2W1--12V-3030-

RO - Round Open

C1 - Covered w/ 1 Side Open

C1 - Covered w/ 2 Sides Open


WH - Matte White

BN - Brushed Nickel

BK - Black



PRODUCT DIMENSIONS:

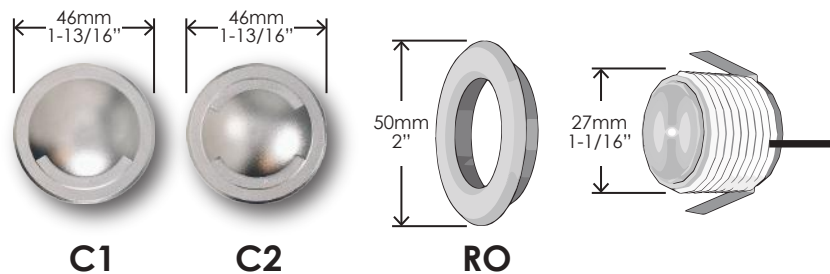

AVAILABLE ACCESSORIES:

Rough In Housing

(For use in concrete, soil or gravel)

GL-W1-RH



12V Dimmable Drivers

25W • GLS-12025-TD

50W • GLS-12050-TD

100W • GLS-12100-TD

150W • GLS-12150-TD

200W • GLS-12200-TD