

INTEGRATED LED DOWNLIGHT **PART NUMBER: GL-8D3-DS-3036**



SPECIFICATIONS:

Light Output: 800 Lumens $\pm$ 10%
 Power: 8 Watts
 Efficacy (Lumens per Watt): 100 LM/W
 Colour Accuracy (CRI): 80+
 Light Colour: 3000K Warm White
 LED Chip Epistar
 Trim Size: 3" (Actual: 3.54"/90mm)
 Beam Angle: 36°
 Gimbal Angle: 0°
 Dimmable
 IC Rated
 Damp Location Rated
 35,000 Life Hours
 Power Supply (Driver) Included


LIGHTING FACTS **INTEGRATED LED DOWNLIGHT**

ITEM NO. GL-8D3-DS-3036

Light Output (Lumens) **800**
 Watts **8**
 Lumens per Watt (Efficacy) **100**

Colour Accuracy **80+**
 Colour Rendering Index (CRI)

Light Colour 3000K Warm White

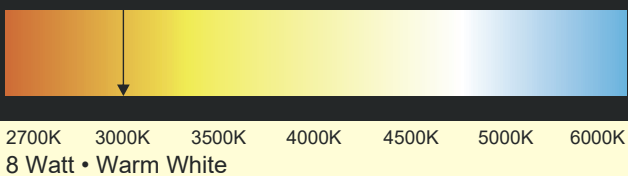

PHOTOMETRICS:

MOUNTING HEIGHT (FT.) CENTER BEAM FOOT CANDLES (FC) EDGE BEAM FOOT CANDLES (FC) BEAM AREA COVERED (FT.)

5 FT. 0.0 FC 0.0 FC 0'-0"

7 FT. 0.0 FC 0.0 FC 0'-0"

9 FT. 0.0 FC 0.0 FC 0'-0"

12 FT. 0.0 FC 0.0 FC 0'-0"

16 FT. 0.0 FC 0.0 FC 0'-0"

18 FT. 0.0 FC 0.0 FC 0'-0"

COMING SOON



INTEGRATED LED DOWNLIGHT **PART NUMBER: GL-8D3-DS-3036**

ORDERING INFORMATION:

1. Select Reflector Colour:

GL-8D3-DS-3036

CL - Clear Specular (Chrome)


BK - Black Specular

2. Select Trim Colour:


GL-3TR-DS-

WH - Matte White

BK - Matte Black

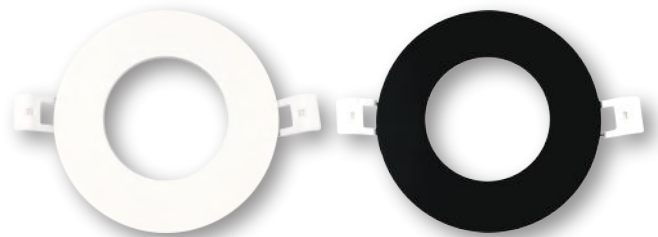

PRODUCT DIMENSIONS:

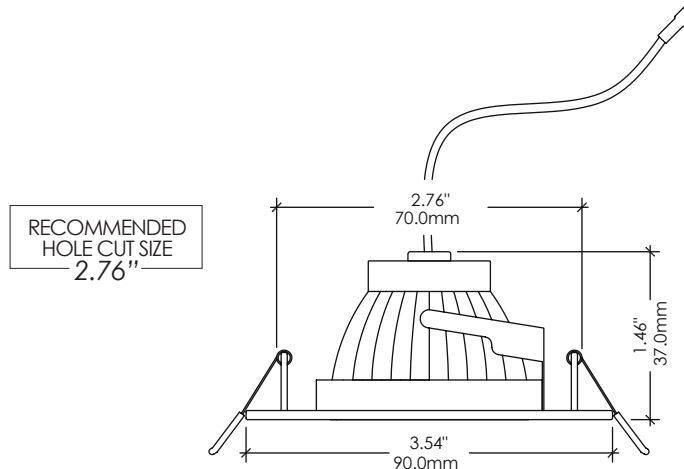

Power Supply (Driver) Size:

3-3/4" x 2-7/16" x 1-1/4"

(95mm x 61mm x 32mm)

ACCESSORIES:

Select Mount Plate for New Construction: **GL-MP25U**

