

INTEGRATED LED DOWNLIGHT **PART NUMBER: GL-9D3-3030-V2**



SPECIFICATIONS:

Light Output: 900 Lumens $\pm$ 10%
 Power: 9 Watts
 Efficacy (Lumens per Watt): 100 LM/W
 Colour Accuracy (CRI): 80+
 Light Colour: 3000K Vibrant Warm White
 LED Chip Epistar
 Trim Size: 3" (Actual: 3.74"/95 mm)
 Beam Angle: 30°
 Gimbal Angle: 30°
 Dimmable
 IC Rated
 Damp Location Rated
 25,000 Life Hours
 Power Supply (Driver) Included


LIGHTING FACTS **INTEGRATED LED DOWNLIGHT**

ITEM NO. **GL-9D3-3030-V2**

Light Output (Lumens) **900**
 Watts **9**
 Lumens per Watt (Efficacy) **100**

Colour Accuracy **80+**
 Colour Rendering Index (CRI)

Light Colour **3000K Warm White**

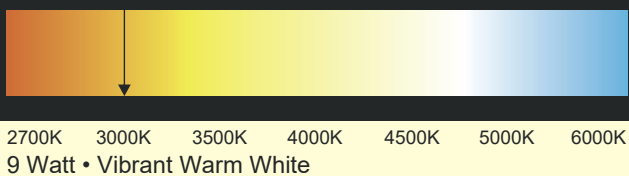

PHOTOMETRICS:

MOUNTING HEIGHT (FT.)	CENTER BEAM FOOT CANDLES (FC)	EDGE BEAM FOOT CANDLES (FC)	BEAM AREA COVERED (FT.)
4 FT.	123.0 FC	38.0 FC	2'-2"
6 FT.	56.0 FC	15.0 FC	3'-3"
8 FT.	31.0 FC	9.0 FC	4'-3"
10 FT.	20.0 FC	5.0 FC	5'-4"
12 FT.	14.0 FC	4.0 FC	6'-5"
14 FT.	11.0 FC	3.0 FC	7'-6"
16 FT.	9.0 FC	2.0 FC	8'-7"
18 FT.	6.0 FC	1.0 FC	9'-8"



INTEGRATED LED DOWNLIGHT

PART NUMBER: GLG-9D3-3030-V2


ORDERING INFORMATION:

1. Select Trim Colour:
GL-9D3-3030-V2-

WH - Clear Specular (Chrome) with Matte White Trim
BK - Clear Specular (Chrome) with Matte Black Trim



PRODUCT DIMENSIONS:

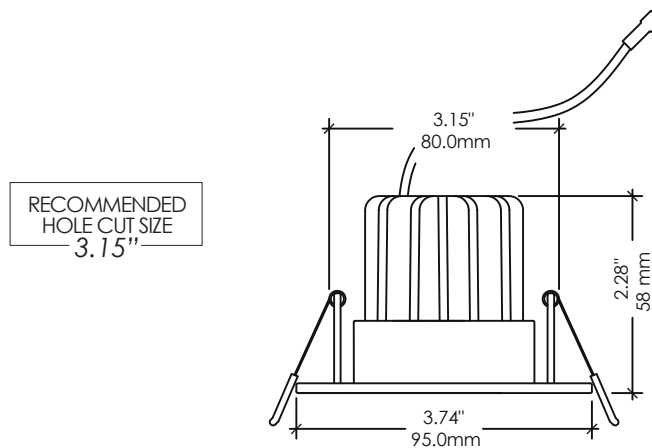

Power Supply (Driver) Size:
3-3/4"x 2-1/2" x 1-1/4"
(95mm x 62mm x 32mm)

ACCESSORIES:

Select Mount Plate for New Construction: **GL-MP3U**

