

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

No lead brass PEX F1807 × PEX F1807 full port straight ball valves with lever handle.

Qty	Stk. #	Size	Dimension, in/(mm)						ID	Weight, lb/(kg)
			A	B	C	D	E	F		
	23305NL	½" PEX	0.87 (22)	2.44 (62)	1.64 (41.7)	2.07 (52.7)	4.84 (123)	3.46 (88)	0.35 (9)	0.27 (0.122)
	23322NL	¾" PEX	1.22 (31)	2.58 (65.5)	1.81 (46)	2.42 (61.5)	4.88 (123.9)	3.46 (88)	0.53 (13.5)	0.41 (0.185)
	23328NL	1" PEX	1.46 (37)	3.17 (80.5)	2.09 (53.2)	2.82 (71.7)	6.00 (152.6)	4.29 (109)	0.71 (18.1)	0.67 (0.302)
	23335NL	1 ¼" PEX	1.69 (43)	3.62 (92)	2.19 (55.5)	3.03 (77)	6.22 (158)	4.29 (109)	0.87 (22.2)	0.90 (0.410)
	23341NL	1 ½" PEX	1.97 (50)	4.29 (109)	2.38 (60.5)	3.37 (85.5)	7.89 (200.5)	5.63 (143)	1.04 (26.5)	1.35 (0.612)
	23354NL	2" PEX	2.44 (62)	5.57 (141.5)	2.63 (67)	3.86 (98)	8.59 (218.3)	5.63 (143)	1.37 (34.7)	2.33 (1.055)

Technical Data

Specifications	
Materials	
Body	No Lead (C46500) Brass
Seat	PTFE
Ball	Stainless steel
Packing	PTFE
O-ring	NBR
Stem	Brass
Handle nut	Plated steel
Lock washer	Plated steel
Handle	Plated steel
Packing nut	Brass
Cap	No Lead (C46500) Brass
Operating pressure rating	180°F @ 100 psi (82.2°C @ 0.69 MPa)

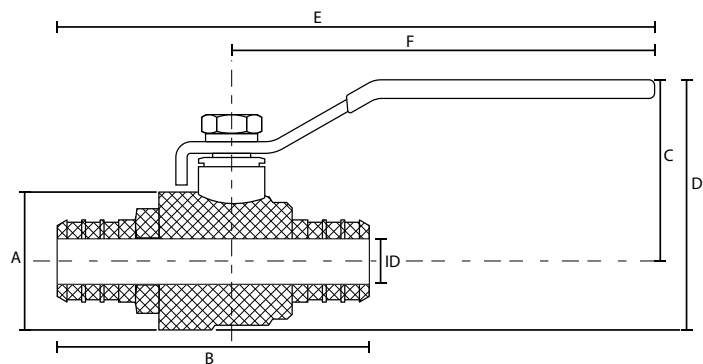

Listings	Standards
IAPMO cUPC	ASTM F1807 compliant
	IAPMO/ANSI Z1157
Codes	NSF/ANSI 14
UPC	NSF/ANSI 61
NPCC	NSF/ANSI 372

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty