

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid brass fittings adapts PEX tubing to male NPT thread.


Technical Data

Material:..... Brass (JIS C-3604)
Operating Temperature:..... 82.2°C / 180°F
Operating Pressure:..... 0.69 MPa / 100 psi

Standards / Listings

Manufactured to B137.5 & F-877

Qty	PEX Size	NPT Size	Stk. #	Dimension				Weight
				A	B	C	D	
	3/8"	1/2"	68012	1-11/16" (42 mm)	5/8" (15.5 mm)	1" (25.12 mm)	7/8" (22 mm)	0.17 lb 75 g
	1/2"	1/2"	68005	1-3/4" (44 mm)	5/8" (15.5 mm)	1" (26 mm)	15/16" (24 mm)	0.18 lb 80 g
	5/8"	3/4"	68019	1-13/16" (46 mm)	11/16" (16.5 mm)	1-5/16 " (33 mm)	1-3/16" (30 mm)	0.3 lb 135 g
	3/4"	3/4"	68022	1-13/16" (45.5 mm)	11/16" (16.5 mm)	1-7/16" (36 mm)	1-1/4" (32 mm)	0.33 lb 150 g
	1"	1"	68028	1-15/16" (49 mm)	11/16" (17 mm)	1-3/4" (44 mm)	1-1/2" (38 mm)	0.47 lb 215 g

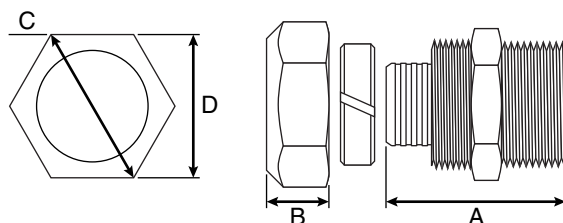

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Heating Warranty

This page is intentionally blank.