


Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX F1960 plugs for use with PEX-a potable water expansion systems.

Qty	Stk. #	Size	Dimension, in/(mm)				Weight, lb/(kg)
			A	B	C	ID	
	EX15005	½"	0.712 (18.0)	0.140 (3.6)	0.844 (21.4)	0.41 (10.4)	0.007 (0.003)
	EX15022	¾"	0.943 (24.0)	0.142 (3.6)	1.094 (27.8)	0.61 (15.5)	0.013 (0.006)
	EX15028	1"	1.171 (29.7)	0.142 (3.6)	1.33 (33.8)	0.81 (20.6)	0.024 (0.011)
	EX15035	1¼"	1.437 (36.5)	0.157 (4.0)	1.7 (43.2)	0.97 (24.64)	0.046 (0.021)
	EX15041	1½"	1.705 (43.3)	0.197 (5.0)	1.811 (46.0)	1.084 (27.54)	0.062 (0.028)
	EX15054	2"	2.149 (54.6)	0.236 (6.0)	2.52 (64.0)	1.484 (37.7)	0.152 (0.069)

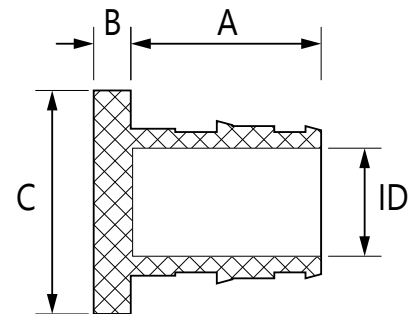

Technical Data

Specifications

Material	PPSU
Operating Pressure rating	180°F @ 100psi (82.2°C @ 0.69MPa)

Listings

cNSFus-pw-G

Codes

IAPMO UPC

Standards

ASTM F1960	NSF/ANSI 14
ASTM F877	NSF/ANSI 61
CSA B137.5	NSF/ANSI 372

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a F1960 Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty

This page is intentionally blank.