
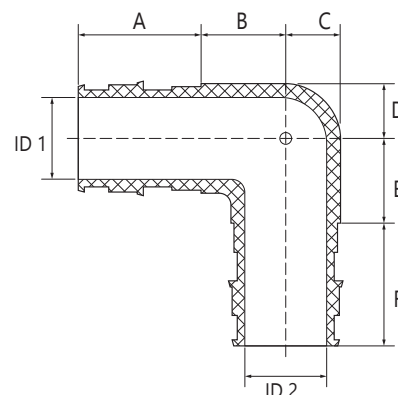


Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX F1960 elbows for use with PEX-a potable water expansion systems.

Qty	Stk. #	Size	Dimension, in/(mm)								Weight, lb/(kg)
			A	B	C	D	E	F	ID1	ID2	
	EX18005	1/2" x 1/2"	0.71 (18.0)	0.52 (13.2)	0.43 (10.9)	0.52 (13.2)	0.43 (10.9)	0.71 (18.0)	0.41 (10.3)	0.41 (10.3)	0.013 (0.006)
	EX18022	3/4" x 3/4"	0.94 (23.8)	0.68 (17.3)	0.56 (14.1)	0.68 (17.3)	0.56 (14.1)	0.94 (23.8)	0.61 (15.5)	0.61 (15.5)	0.027 (0.012)
	EX18028	1" x 1"	1.18 (29.9)	0.80 (20.4)	0.68 (17.3)	0.80 (20.4)	0.68 (17.3)	1.18 (29.9)	0.81 (21.6)	0.81 (21.6)	0.047 (0.022)
	EX18035	1 1/4" x 1 1/4"	1.44 (36.5)	1.00 (25.5)	0.68 (17.25)	0.68 (17.25)	1.00 (25.5)	1.44 (36.5)	0.97 (24.64)	0.97 (24.64)	0.106 (0.048)
	EX18041	1 1/2" x 1 1/2"	1.70 (43.3)	1.21 (30.7)	0.75 (18.925)	0.75 (18.925)	1.21 (30.7)	1.70 (43.3)	1.08 (27.54)	1.08 (27.54)	0.154 (0.070)
	EX18054	2" x 2"	2.15 (54.6)	1.53 (38.9)	1.04 (26.35)	1.04 (26.35)	1.53 (38.9)	2.15 (54.6)	1.48 (37.7)	1.48 (37.7)	0.381 (0.173)

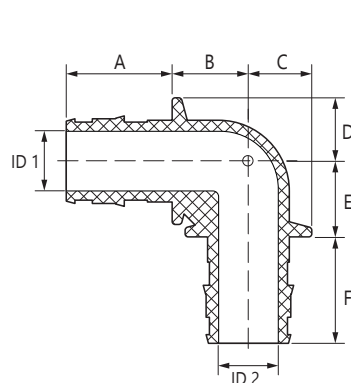

Technical Data

Specifications

Material	PPSU
Operating Pressure rating	180°F @ 100psi (82.2°C @ 0.69MPa)

Listings

ICC-ES PMG 1087
cNSFus-pw
cQAlus P371

Codes

IMC
IPC
IRC
NPC of Canada
NSPC
UMC
UPC

Standards

ASTM E84
ASTM F1960
ASTM F877
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372
ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a F1960 Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty

This page is intentionally blank.