


Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX F1960 couplings for use with PEX-a potable water expansion systems.

PEX F1960 Couplings

Qty	Stk. #	Size	Dimension, in/(mm)						Weight, lb/(kg)
			A	B	C	D	ID 1	ID 2	
	EX19005	½" × ½"	0.71 (18.0)	0.13 (3.3)	0.71 (18.0)	0.84 (21.3)	0.41 (10.3)	0.41 (10.3)	0.010 (0.005)
	EX19022	¾" × ¾"	0.94 (23.8)	0.14 (3.6)	0.94 (23.8)	1.09 (27.7)	0.61 (15.5)	0.61 (15.5)	0.019 (0.009)
	EX19028	1" × 1"	1.18 (29.9)	0.14 (3.6)	1.18 (29.9)	1.33 (33.8)	0.81 (21.6)	0.81 (21.6)	0.036 (0.016)
	EX19035	1¼" × 1¼"	1.44 (36.5)	0.20 (5.0)	1.44 (36.5)	1.70 (43.2)	0.97 (24.64)	0.97 (24.64)	0.068 (0.031)
	EX19041	1½" × 1½"	1.70 (43.3)	0.20 (5.0)	1.70 (43.3)	1.81 (46.0)	1.08 (27.54)	1.08 (27.54)	0.090 (0.041)
	EX19054	2" × 2"	2.15 (54.6)	0.24 (6.0)	2.15 (54.6)	2.52 (64.0)	1.48 (37.7)	1.48 (37.7)	0.231 (0.105)

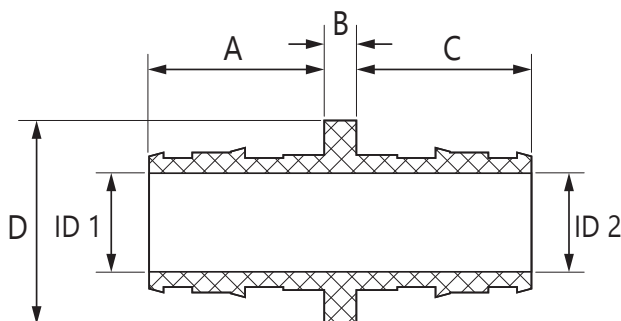

Technical Data

Specifications	
Material	PPSU
Operating Pressure rating	180°F @ 100psi (82.2°C @ 0.69MPa)

Listings

ICC-ES PMG 1087
cNSFus-pw
cQAlus P371

Codes

IMC
IPC
IRC
NPC of Canada
NSPC
UMC
UPC

Standards

ASTM E84
ASTM F1960
ASTM F877
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372
ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a F1960 Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty

PEX F1960 Reducing Couplings

Qty	Stk. #	Size	Dimension, in/(mm)						Weight, lb/(kg)
			A	B	C	D	ID 1	ID 2	
	EX19225	¾" × ½"	0.94 (23.8)	0.13 (3.3)	0.71 (18.0)	1.09 (27.7)	0.61 (15.5)	0.41 (10.3)	0.017 (0.008)
	EX19282	1" × ¾"	1.18 (29.9)	0.14 (3.6)	0.94 (23.8)	1.33 (33.8)	0.81 (21.6)	0.61 (15.5)	0.030 (0.014)
	EX19238	1¼" × 1"	1.44 (36.5)	0.20 (5.0)	1.18 (30.0)	1.70 (43.2)	0.97 (24.64)	0.79 (20.02)	0.057 (0.026)
	EX19248	1½" × 1"	1.70 (43.3)	0.20 (5.0)	1.18 (30.0)	1.81 (46.0)	1.08 (27.54)	0.79 (20.02)	0.073 (0.033)
	EX19243	1½" × 1¼"	1.70 (43.3)	0.20 (5.0)	1.44 (36.5)	1.81 (46.0)	1.08 (27.54)	0.97 (24.64)	0.082 (0.037)
	EX19264	2" × 1½"	2.15 (54.6)	0.24 (6.0)	1.70 (43.3)	2.52 (64.0)	1.48 (37.7)	1.08 (27.54)	0.181 (0.082)

