


Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid no lead (Eco) Brass PEX F1960 × MNPT adapters for PEX-a potable water expansion systems.

Dimension, in/(mm)										
Qty	Stk. #	Size	A	B	C	D	E	ID1	ID2	Weight, lb/(kg)
	EX27505NL	½" PEX × ½" MNPT	0.71 (18.0)	0.25 (6.4)	0.78 (19.8)	0.88 (22.4)	0.95 (24.1)	0.38 (9.7)	0.56 (14.2)	0.114 (0.052)
	EX27522NL	¾" PEX × ¾" MNPT	0.95 (24.1)	0.25 (6.4)	0.83 (21.1)	1.13 (28.7)	1.23 (31.2)	0.60 (15.2)	0.74 (18.8)	0.187 (0.085)
	EX27528NL	1" PEX × 1" MNPT	1.11 (28.2)	0.25 (6.4)	1.03 (26.2)	1.38 (35.1)	1.52 (38.6)	0.80 (20.3)	0.80 (20.3)	0.400 (0.181)
	EX27535NL	1¼" PEX × 1¼" MNPT	1.45 (36.7)	0.38 (9.5)	1.13 (28.7)	1.69 (42.9)	1.95 (49.5)	0.97 (24.6)	1.19 (30.2)	0.647 (0.294)
	EX27541NL	1½" PEX × 1½" MNPT	1.70 (43.2)	0.50 (12.7)	1.19 (30.2)	1.94 (49.3)	2.19 (55.6)	1.10 (27.9)	1.44 (36.6)	0.867 (0.393)
	EX27554NL	2" PEX × 2" MNPT	2.15 (54.6)	0.45 (11.4)	1.26 (32.0)	2.50 (63.5)	2.80 (71.1)	1.58 (40.1)	1.94 (49.3)	1.348 (0.611)

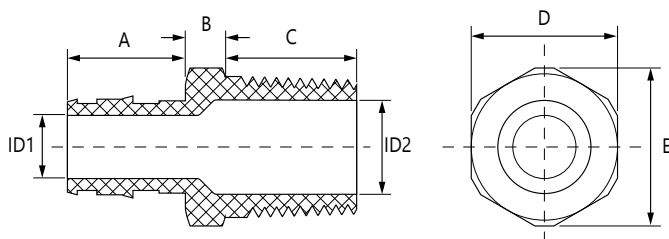

Technical Data

Material	No Lead (Eco) Brass - C69300
Operating pressure rating	180°F @ 100 psi (82.2°C @ 0.69 MPa)

Specifications

Listings

cNSFus-pw-G

Codes

IAPMO UPC

Standards

ASTM F877
ASTM F1960
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- F1960 PEX-a Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty

This page is intentionally blank.