


# HWSS232 1W-00 Hand Hygiene Sink with laminar flow faucet

MODEL RANGE: HEALTHCARE | HWSS232 1W-00

Special hospital equipment | Ozone technology

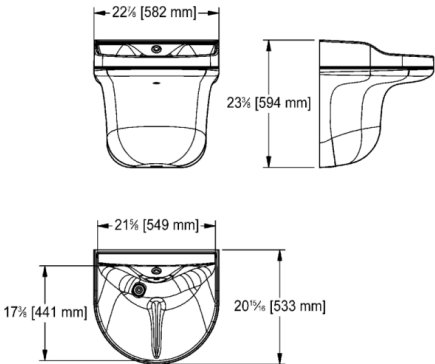

White solid surface hand hygiene sink with removable shroud. Left rear 1 1/2" (DN 40) waste location to prevent water from splashing directly into the waste. An anti-splash feature runs through the centre of the sink to greatly reduce splashing. IR controls trigger an illuminated crystal clear true laminar flow water stream delivering water with dissolved ozone and other mixed oxidants on demand. Flow rate is 5l (1.32gal)/min. Ozonated water has been proven as a safe and extremely effective way to help sanitize the sink and the waste and improve the efficiency of hand washing (even if a user does not use soap).

Other control features include; a post wash cycle of 3 seconds to wash soap residue and bacteria down the sink. A daily purge cycle prevents water from stagnating in the drain lines and traps, ensuring continuous waste disinfection. Recommended for areas with normal water conductivity in range of 75-350 TDS. If unaware of your local water conductivity, please contact customer service and this can easily be determined for you. Recommended water temperature is between 27-35°C. Hand hygiene sinks are specifically designed for hand washing only. They are not recommended as a drinking source, for washing utensils or for draining of medical bags or bedpans.

Medi-flo is cUPC certified and is compliant with CSA B45.5-11/IAPMO Z124-2011 and IGC156-2012el; and additionally OHSPD, OPM-0481-13. Meets and exceeds various national healthcare standards; ie, CSAZ8000, CSAZ317.1-16.

Wheelchair accessible: meets ADA, ANSI A117.1 and CSA B651-04. Patent Pending. An optional handheld programmer (AC01-005) enables hand-hygiene data logging and para-meter adjustments such as sensor range and ozone run times. A plug-in transformer required for generation of mixed oxidants is included. Our pre-set thermostatic mixing valve is also available as part number MEDI-MIX. Franke's in-wall carrier (IWC2104) is also available for quicker installation.

20 7/16 x 23 15/16" Overall. 17 5/8 x 21 7/16 x 9" Bowl. (FB x LR x D. 519 x 607 mm Overall. 448 x 544 x 228 mm Bowl. (FB x LR x D).

Technical data	
Bowl height	9 3/4 inch
Bowl width	17 3/8 "
Bowl depth	21 5/8 "
Overall depth	21 "
Overall height	23 3/8 "
Overall width	23 "
Material	Synthetic
Material code	Miranit
Type of mounting	Wall mounting
Waste hole position	Left back corner
Bowl finish	High polished
Colour	White
Number of bowls	1.00000
Overflow	No
Surface finish	High polished
Franke Water Systems   commercial-info.ca@franke.com   00000.franke.com   2021-03-02	
Type of waste kit	Domed waste
Waste kit included	Yes
Waste size	DN 40
Type of basin	Single compartment

PROJECT INFORMATION	
Item Location	
Project Number	
Quote Number	
Notes	
ENGINEER'S APPROVAL	



# HWSS232 1W-00 Hand Hygiene Sink with laminar flow faucet

MODEL RANGE: HEALTHCARE | HWSS232 1W-00

Special hospital equipment | Ozone technology

Accessory Optional



IWC2104 In-wall carrier for Medi-flo  
2030036896  
IWC2104



MIX-LF Mixing valve for Aquarius  
faucets  
2000102504  
MIX-LF

