

Type IC & Air-Tight



DESCRIPTION

4" LED Floating Gimbal

Adjustable in any direction and easy to use

Perfect for accent lighting

Selectable color changing switch

FEATURES & BENEFITS

Ideal for slopped ceilings, wall washing, highlighting artwork, task or general lighting.

1 3/8" Deep - Fits in 1" ceiling space

Type IC Rated - No Housing Required

Driver Inside Connection Box - No Junction Box Needed

5 CCT Switchable - from 2700K to 5000K

White and Black trims in stock

Damp Location & Airtight



ORDERING GUIDE

White Trim **LED-4-S9W-5CCT-FG-WH**
Black Trim **LED-4-S9W-5CCT-FG-BK**

Project:

Location:

Model:

Qty:

Notes:


SPECIFICATION	
Applications	Slopped ceilings, Wall washing, General lighting
Energy Used	9 W
Color Temperature (K)	5 CCT switchable: 2700 - 3000 - 3500 - 4000 - 5000
Light Output (lm)	740 - 770 - 820 - 850 - 855
Halogen Equivalent	60 W
Beam Angle	38°
CRI	90+
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4° F (-20° C) to +104° F (+40° C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star
Warranty	3 Year

DIMENSIONS

ID 4" OD 4 7/8" Depth 1 3/8"

Cut Out 4 1/8" to 4 1/4"

120V Triac Dimmable Driver Included

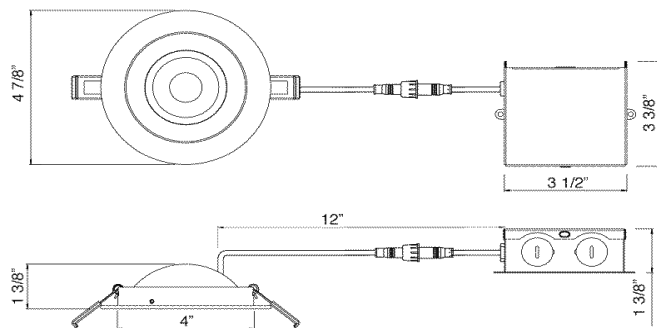

ACCESSORIES

Sold Separately



13" Mounting Plate Flat cat # **MP4-2**

26" Flat Rough-In Plates - cat # **RIP4**

Flanged Plate with Hanger Bars - cat # **FRP4**

Jumper Cable 10 ft cat # **JC-5CCT-10**
Maximum Extension 40 feet

Goof Ring OD 5 3/4"
White cat # **GR4**

Black cat # **GR4-BK**