



LL3R

3" Round Slim Recessed LED 11W



DESCRIPTION

3" Round Slim Recessed LED With Integral Driver In Connection Box


FEATURES & BENEFITS

- 1 1/4" Deep - Install Where Ceiling Space Is Limited
- Type IC Rated - No Housing Required
- Air-Tight & Wet Location rated
- 5CCT user selectable 2700-3000-3500-4000-5000K
- or Dim to Warm 3000K to 1800K options
- CRI 90+ for True Color Rendering
- Options of 4 beam angles: standard 38° and custom 15°, 24° & 60°
- Driver Inside Connection Box - No Junction Box Needed

MOUNTING

- Cut Hole In Ceiling And Snap Fixture In Opening
- With Attached Spring Clips
- Ceiling Clearance Required for driver to fit: 3 1/2"

DIMENSIONS: ID 2 7/8" OD 3 1/2" Cut Out 3"

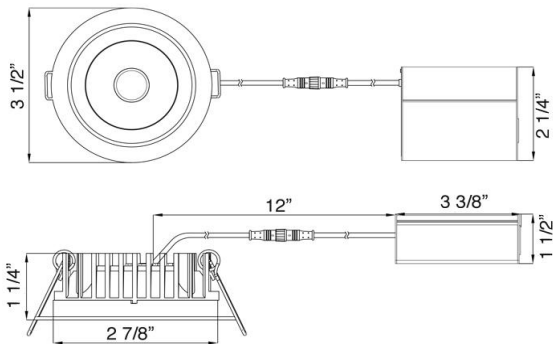

ORDERING GUIDE

LL3R-5CCT-WH	5CCT White Trim
LL3R-3018K-WH	Dim to Warm White Trim
LL3R-5CCT-BK	5CCT Black Trim
LL3R-3018K-BK	Dim to Warm Black Trim
LL3R-5CCT-ORB	5CCT Oil Rubbed Bronze Trim
LL3R-3018K-ORB	Dim to Warm Oil Rubbed Bronze Trim

Standard Beam Angle: 38°

Custom Beam Angles - order as adder:

15D Lens LD3R LD3S LL3R	15°
24D Lens LD3R LD3S LL3R	24°
60D Lens LD3R LD3S LL3R	60°

Project: _____

Location: _____

Model: _____ Beam: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Renovations & New Construction
Power	11 W
Color Temperature (K)	2700 3000 3500 4000 5000 DTW 3000-1800K
Light Output (lm)	780 850 920 940 930 900
Halogen Equivalent	90 W
Beam Angle	standard 38° custom 15°, 24°, 60°
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS




120V TRIAC Dimmable
Driver Included



Optional 120V-347V
Driver 0-10V Dimmable
Order Separately as
[model # LLL-LD1025T3](#)

ACCESSORIES

Sold Separately

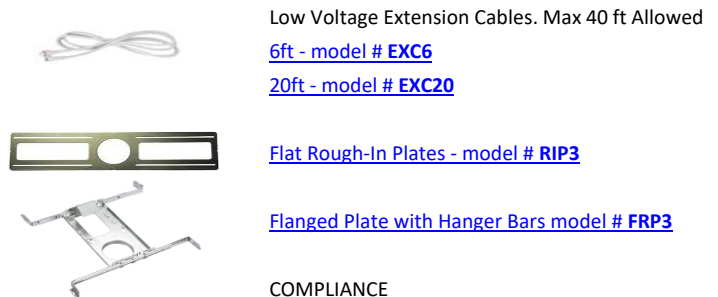

Low Voltage Extension Cables. Max 40 ft Allowed
[6ft - model # EXC6](#)
[20ft - model # EXC20](#)

[Flat Rough-In Plates - model # RIP3](#)

[Flanged Plate with Hanger Bars model # FRP3](#)

COMPLIANCE



Type IC & Air-Tight
Wet Location

Lotus LED Lights USA
250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Vancouver WA

www.LotusLEDLights.com
mailing addresses
warehouses

Lotus LED Lights CANADA
1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON