
MOEN®
COMMERCIAL

Specifications

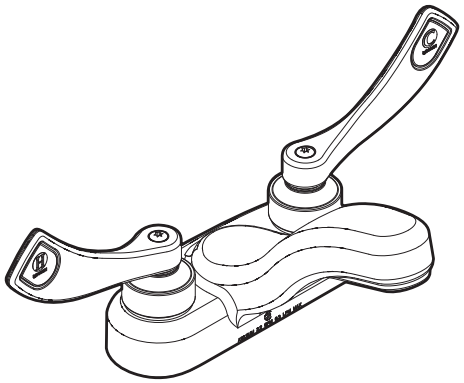

Two-Handle Lavatory Faucet

Models: 8217

NOTE: Designed to be installed through 2 holes - 1" min. dia.

DESCRIPTION
- Brass construction with chrome plated finish
- 4″ centerset
- 1/2" IPS connections
- Vandal resistant torx head screws
- Vandal resistant aerator


OPERATION
- Wrist Blade handles with hot and cold color indicators

FLOW
- Aerator is limited to .5 gpm max. (8.3 L/min)

CARTRIDGE
- Brass shell, ceramic disc cartridge
- 1/4 turn operation

STANDARDS
- Third party certified to CSA B125.1, ASME A112.18.1, and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA** for lever handles

WARRANTY
- Warranted for 5 years against material or manufacturing defects

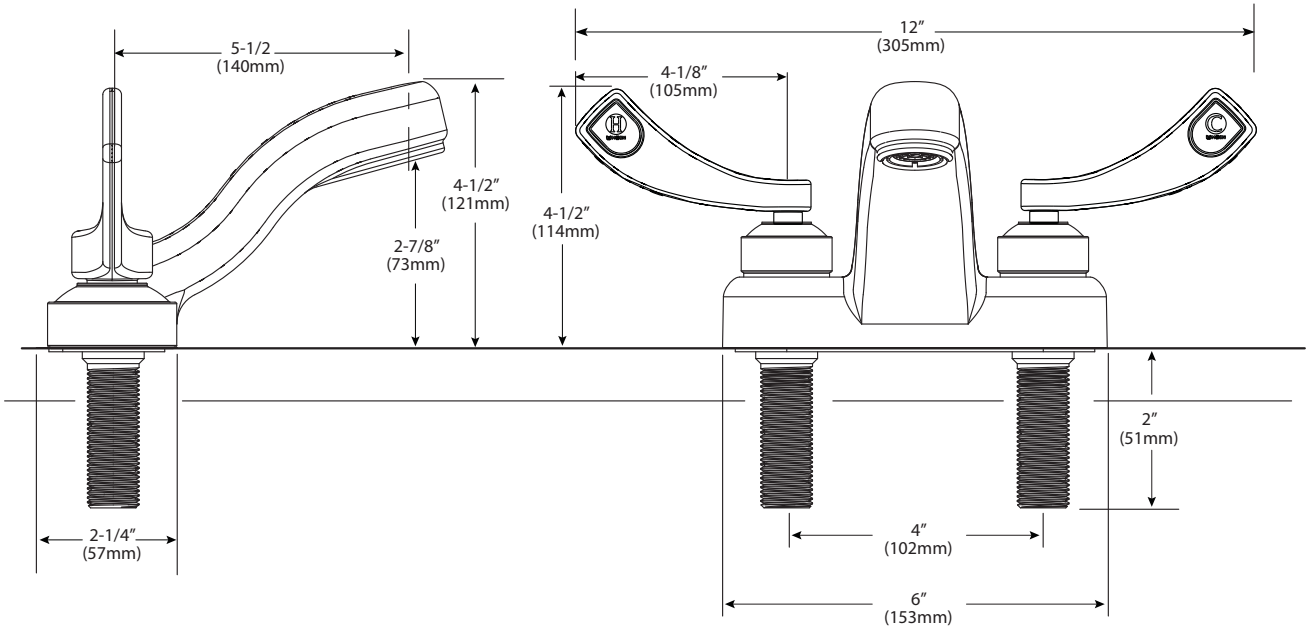

CRITICAL DIMENSIONS

(DO NOT SCALE)

MOEN SPECIFIER SERVICES 1-800-321-8809 Ext. 2158
www.moen.com