




Features

Input Power on AC (when charging)	6.5W
Output Power on Battery	3.5 W
Lamp Type	2x1W SMD LED
Input Voltage	120/347 VAC
Frequency	60 Hz
Battery Type	NI-MH
Working Time	120 Minutes
Charging Time	15-24 Hours

Description

- Injection-molded thermoplastic ABS housing
- CSA 22.2 compliant
- 2-Sided sign
- Wall, side and ceiling mountable
- Input Power on AC is 1.5W when fully charged
- Input Voltage: 120/347 VAC, 60Hz
- Super bright LED light heads. 71 lumens each
- 2 Nickel Metal Hydride Batteries 3.6V 1200mAh
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: ≥120 minutes including 3W remote capability
- Conversion time: <0.2 second
- IP Class: IP20
- Max install height: 5.1m (16.7 ft)
- Operating Temperature: 0 °C ~ 40 °C / 32 °F ~104 °F

Technical Drawing

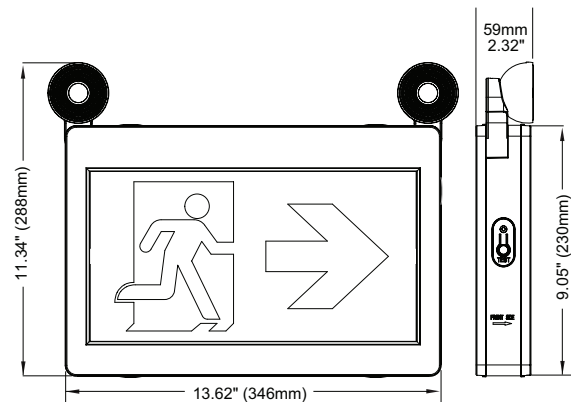

Remote Add-ons



EL-7030A (1.5W)



EL-7030B (3W)

Included Pictograms



With Arrow 2 pcs



Without Arrow 1 pc



Ordering Information

Model	Description
ELRM-180-2RC	LED Running Man Sign Combo Unit (3W, Remote Capable), 6 per case

Canada

25 Interchange Way Vaughan, ON L4K 5W3
 Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.

4575 Witmer Industrial Estates Niagara Falls, NY 14305
 Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113