



## TYPE A

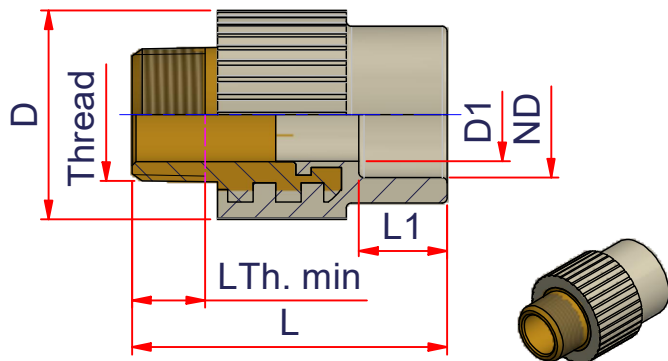

## TYPE B

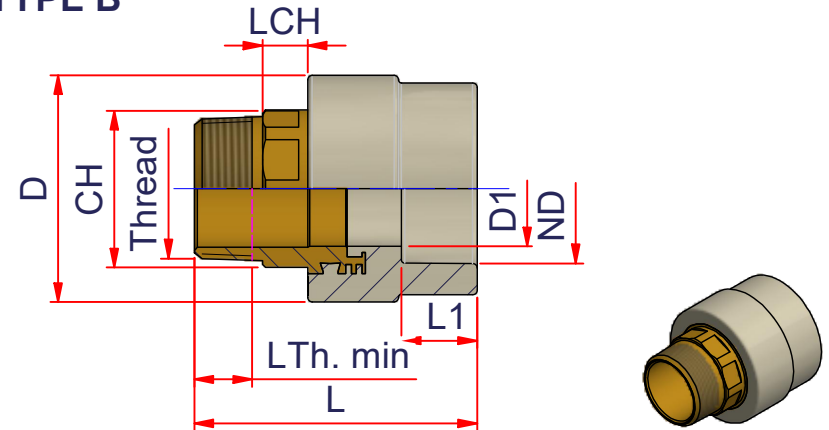

| CODE                | ND               | Thread     | L Thread min | D1   | D    | L1   | L    | CH   | LCH  |
|---------------------|------------------|------------|--------------|------|------|------|------|------|------|
| 27NRFM2012NPTL (A)  | 1/2" => 20 mm    | 1/2" NPT   | 0.53         | 0.56 | 1.46 | 0.63 | 2.17 | -    | -    |
| 27NRFM2034NPTL (A)  | 1/2" => 20 mm    | 3/4" NPT   | 0.55         | 0.71 | 1.69 | 0.81 | 2.48 | -    | -    |
| 27NRFM2512NPTL (A)  | 3/4" => 25 mm    | 1/2" NPT   | 0.53         | 0.56 | 1.46 | 0.67 | 2.21 | -    | -    |
| 27NRFM2534NPTL (A)  | 3/4" => 25 mm    | 3/4" NPT   | 0.55         | 0.71 | 1.65 | 0.69 | 2.44 | -    | -    |
| 27NRFM3234NPTL (A)  | 1" => 32 mm      | 3/4" NPT   | 0.55         | 0.71 | 1.79 | 0.79 | 2.70 | -    | -    |
| 27NRFM321NPTL (A)   | 1" => 32 mm      | 1" NPT     | 0.68         | 0.95 | 2.13 | 0.79 | 2.80 | -    | -    |
| 27NRFM40114NPTL (B) | 1" 1/4" => 40 mm | 1"1/4" NPT | 0.71         | 1.30 | 2.56 | 0.87 | 3.58 | 1.65 | 0.59 |
| 27NRFM50112NPTL (B) | 1" 1/2" => 50 mm | 1"1/2" NPT | 0.72         | 1.50 | 2.95 | 0.98 | 3.68 | 1.97 | 0.59 |
| 27NRFM632NPLT (B)   | 2" => 63 mm      | 2" NPT     | 0.76         | 1.95 | 3.62 | 1.14 | 4.13 | 2.36 | 0.71 |
| 27NRFM75212NPTL (B) | 2" 1/2" => 75 mm | 2"1/2" NPT | 1.14         | 2.50 | 4.33 | 1.30 | 4.41 | 3.15 | 0.79 |
| 27NRFM903NPTL (B)   | 3" => 90 mm      | 3" NPT     | 1.20         | 2.95 | 5.08 | 1.46 | 5.08 | 3.54 | 0.91 |
| 27NRFM1104NPTL (B)  | 4" => 110 mm     | 4" NPT     | 1.30         | 3.92 | 6.30 | 1.69 | 5.83 | 4.53 | 1.18 |

**NIRON**



ITEM:  
**NRFM\_NPTL**

C:\Vault\_Temp\Disegn\ISchede Tecniche\Niron Grey inches\Socket Fusion Fittings\NI10251.dwg

DESC: MALE THREADED ADAPTER W/NPT -  
SOCKET FUSION




DRAWING No:  
**NI10251**

SHEET OF  
**1 2** REV.  
**-1**


www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389

## TYPE C

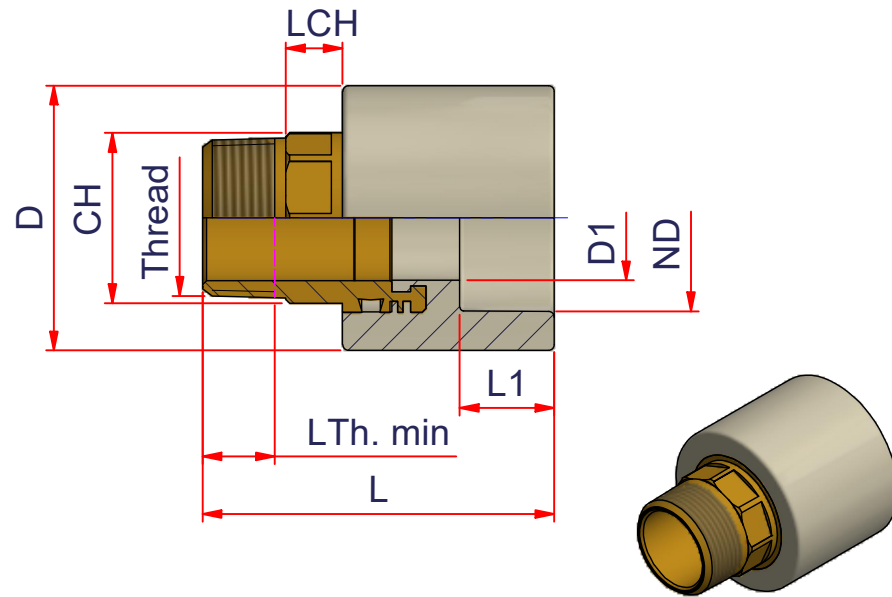

## TYPE D

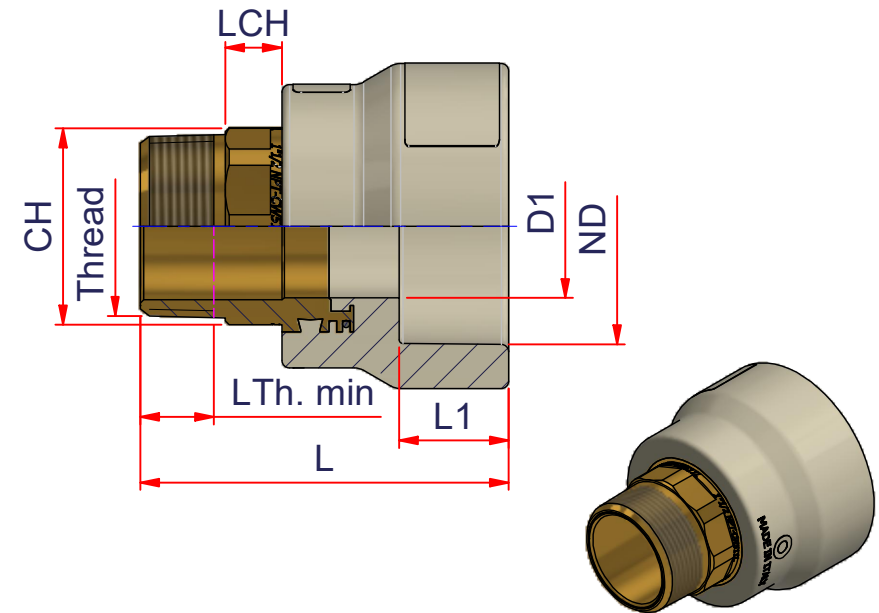

| CODE                | ND              | Thread    | L Thread min | D1   | D    | L1   | L    | CH   | LCH  |
|---------------------|-----------------|-----------|--------------|------|------|------|------|------|------|
| 27NRFM401NPTL (C)   | 1" 1/4 => 40 mm | 1" NPT    | 0.68         | 0.95 | 2.21 | 0.87 | 3.39 | 1.34 | 0.51 |
| 27NRFM50114NPTL (D) | 1" 1/2 => 50 mm | 1"1/4 NPT | 0.75         | 1.30 | 2.68 | 0.98 | 3.66 | 1.77 | 0.59 |
| 27NRFM63112NPTL (D) | 2" => 63 mm     | 1"1/2 NPT | 0.77         | 1.50 | 3.39 | 1.14 | 3.84 | 2.05 | 0.59 |
| 27NRFM752NPTL (D)   | 2" 1/2 => 75 mm | 2" NPT    | 0.94         | 1.95 | 3.98 | 1.30 | 4.29 | 2.52 | 0.71 |
| 27NRFM1254NPTL (C)  | 5" => 125 mm    | 4" NPT    | 1.30         | 3.92 | 6.30 | 1.87 | 6.00 | 4.53 | 1.18 |

**NIRON**



ITEM:  
**NRFM\_NPTL**

C:\Vault\_Temp\Disegn\ISchede Tecniche\Niron Grey inches\Socket Fusion Fittings\NI10251.dwg

DESC: MALE THREADED ADAPTER W/NPT -  
SOCKET FUSION



DRAWING No:  
**NI10251**

SHEET OF  
**2 2**

REV.  
**-1**

www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389