

HI-PRO PIR SENSOR

Model: 80-955



INSTALLATION AND SAFETY INSTRUCTIONS



IMPORTANT: Read before using fixture. Retain for future reference.

CAUTION:



- Operating temperature range: -20°C to 35°C (-4° to 95°F)
- Storage temperature range: -20° to 40°C (-4° to 104°F)
- Not suitable for enclosed luminaires
- Do not expose directly to water
- Set the brightness and time before installation
- One sensor per lamp

INSTALLATION:

1. Set brightness and time before installation

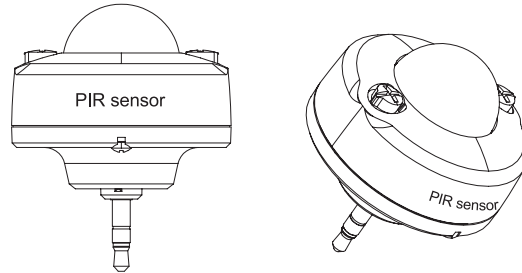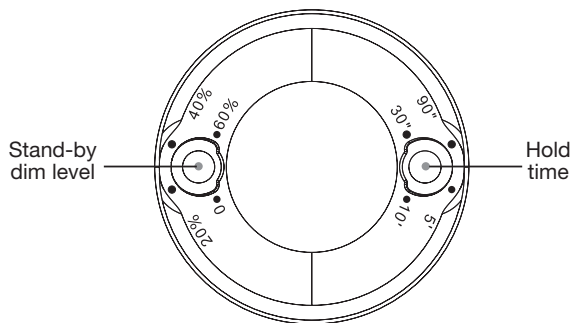

2. Plug in sensor

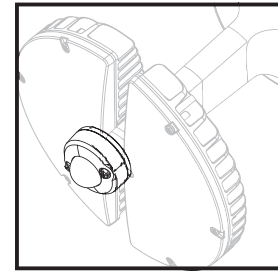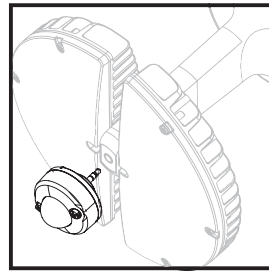


CEILING MOUNT

Top view




Top view

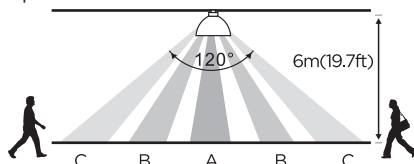


WALL MOUNT

Top view

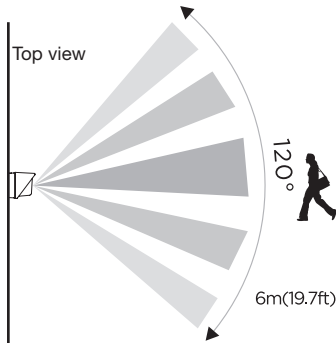

Top view

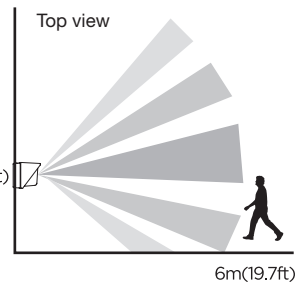

PRECAUCIÓN:

- Temperatura de funcionamiento: -20°C a 35°C (-4° a 95°F)
- Intervalo de temperatura de almacenamiento: -20° a 40°C (-4° a 104°F)
- No apto para utilizarse en instalaciones cerradas.
- No exponga el producto directamente al agua
- Ajuste el brillo y las horas antes de la instalación
- Use un sensor por lámpara

INSTALACIÓN:

1. Ajuste el brillo y las horas antes de la instalación
2. Conecte el sensor

MISE EN GARDE:

- Température de fonctionnement: -20° à 35°C (-4° à 95°F)
- Plage de température pour le stockage: -20° à 40°C (-4° à 104°F)
- Ce produit n'est pas adapté aux luminaires encastrés.
- Ne pas exposer directement à l'eau
- Ajuste el brillo y las horas antes de la instalación
- Un capteur par lampe

INSTALLATION:

1. Régler la luminosité et le temps avant l'installation
2. Un capteur par lampe



Satco Products, Inc.
Brentwood, NY 11717