


T8 COOL BEAM FLUORESCENT HIGH BAY (6-LAMP FULL BODY SPECIFICATION GRADE)



PHILIPS
ADVANCE

Quality Ballasts

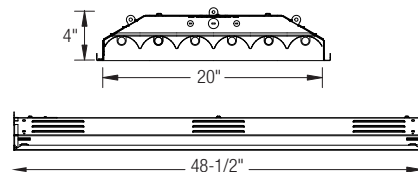

PRODUCT FEATURES:

- Our Cool Beam Technology allows ballast to stay cool through ventilation slots on sides, and to maintain 5 year warranty at 55°C
- Full-body construction is formed from 22-gauge steel to ensure rigidity and endurance
- Body includes knockouts on top and sides for easy wiring
- Reflector is attached to body with 4 screws, and hinges down along with lamps for easy access to ballast
- Rotary lamp sockets hold lamps in place and allow for easy relamping
- Wireguard is standard white finish and may be combined with lens option
- Wireguard and lens option come preinstalled with hinged doorframe for easy access to lamps
- Additional options such as motion sensors, emergency ballasts, lamps and wiring all come prewired from factory
- 95% reflective premium reflector material is engineered to optimize performance for 93% total fixture efficiency
- Post-painted high-gloss enamel finish ensures maximum adhesion and rust resistance

- Using the latest optical technology, our 6-lamp CB luminaire outperforms conventional MH fixtures while maintaining minimal energy consumption
- Four corner tie points are standard for chain or aircraft cable mount
- Comes standard with 2 Instant start GE, pro line multi-volt ballasts model number GE332-MV-H
- Assembled in the USA
- Qualifies for most national and regional utility rebates
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)
- NEC required ballast disconnect is standard

LISTING

UL/C-UL listed to US and Canadian standards

WARRANTY

Guaranteed for five years against mechanical defects

Ordering Information > Example: CB-6-32-T8-ADV-10-MVOLT

CB	6	32-T8						
SERIES	LAMPS	LAMP TYPE	VOLTAGE ²	# OF BALLAST	BALLAST FACTOR	LAMP INSTALLED		
CB - Oracle Cool Beam Industrial Series	6	32-T8 - 32W/T8	(Blank) - MVOLT (120/277) 120 277 347 480	(Blank) - 2 Ballasts 3 - 3 Ballasts	(Blank) - Normal BF HBF - High BF LBF - Low BF	(Blank) - No lamp L30K - 3000K L35K - 3500K L41K - 4100K L50K - 5000K		

BALLAST CONFIGURATION & CODE

32W/T8	DESCRIPTION
(Blank)	Electronic Instant Start
EPS	Electronic Program Start
ADV-7	Advance Mark-7 ²
ADV-10	Advance Mark-10 ²
-	Advance Optanium ²
ADV-ESS	Advance Essential ²
ADV-ROVR	Advance Rover ²
LUT-EHD	Lutron Ecosystem H-Series ²
LUT-2W ¹	Lutron Tu-Wire ²
LUT-EC5	Lutron Ecosystem ²
LUT-EC3	Lutron Eco-10 ²
LUT-TVE ¹	Lutron Tve ²
-	Lutron Hi-Lume 3D ²
-	Lutron Ecosystem (347V Only) ²

1 - Requires 3 Ballasts

2 - Voltage must be specified for dimming ballast.

STANDARD BALLAST INFO

LAMP	# OF LAMPS	LINE VOLTS	Ballast Factor	Power Factor% (>=)	THD% (<=)	Min. Starting Temp (°F/°C)
F32T8	6	120/277	1.15	99	10	-22/ -30

EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)

ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-T8-BX-T5-T5H0-3200	Up to 3200 L. for T8, BX, T5 or T5H0
EMG-SD-T8-BX-T5-T5H0-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5H0
EMG-ICE-T8-BX-T5-T5H0-1400	ICE Pack 1400 L. for T8, BX, T5 or T5H0
GTD	Generator Transfer Device

WIRING OPTIONS

PCSB120	- 10' Nema 5-15R 120V Straight Blade Plug
PCSB277	- 10' Nema 7-15R 277V Straight Blade Plug
PCTL120	- 10' Nema L5-15R 120V Twist Lock Plug
PCTL277	- 10' Nema L7-15R 277V Twist Lock Plug
S01	- 10' 120V/277V SO Cord
S02	- 10' 480V SO Cord
C3	- 6' 3-wire Flex Cable (Single Circuit)
C4	- 6' 4-wire Flex Cable (Double Circuit)

(Consult Factory for 208V, 248V, 347V and 480V wiring)

OTHER OPTIONS

6WG	- Wireguard
6WGCL	- Wireguard with Clear Lens
6WGPL	- Wireguard with Prismatic Lens
6WGDF	- Wireguard with Door frame
6CLDF	- Clear Lens with Door Frame
6PLDF	- Prismatic Lens with Door Frame
6GDF	- Gasketed Door Frame
MH	- Mounting Hub
GSS	- Gripple Suspension System
GSSP	- Gripple System with Paddles
VHCH	- V-Hook with chain kit
VH	- V Hook
MS-480	- Motion Sensor for 480V
MS	- Motion Sensor
MSPH	- Motion Sensor with Photocell
GL	- Generic Lamps Installed
6WHR	- White Reflector
USA	- Made in America Compliance

T8
CB6

Cool Beam Fluorescent 6-lamp T8 High Bay