

ORTECH

LED Lighting



Version 18 . 3
www.ortechindustries.com

Table of Contents

LED Light Bulbs

4

LED Puck Lights

7

LED Step Lights.....

10

LED Strip Lights

12

LED Drivers

16

LED Slim Lights

18

LED Closet Lights

24

LED Security Lights

25

LED Exit Signs

26

LED Wall Pack.....

27

LED High Bay.....

28

LED Troffers

30

LED Flush Mount.....

31

Accessories.....

35

Metal Plates

37

LED Bulbs

A19 9W ES CW		A19 9W ES WW	
- Power:	9W	- Power:	9W
- Voltage:	120V	- Voltage:	120V
- Lumens:	800	- Lumens:	800
- Lamp Base:	E26	- Lamp Base:	E26
- Beam Angle:	240°	- Beam Angle:	240°
- Power Factor:	>0.7	- Power Factor:	>0.7
- Lamp Size:	60x110 mm	- Lamp Size:	60x110 mm
- Lifetime:	15000H	- Lifetime:	15000H
- Dimmable:	No	- Dimmable:	No
- Warranty:	2 years	- Warranty:	2 years
- Energy Star:	Yes	- Energy Star:	Yes

A19 9WD CW		A19 9WD WW	
- Power:	9W	- Power:	9W
- Voltage:	120V	- Voltage:	120V
- Lumens:	800	- Lumens:	800
- Lamp Base:	E26	- Lamp Base:	E26
- Beam Angle:	240°	- Beam Angle:	240°
- Power Factor:	>0.7	- Power Factor:	>0.7
- Lamp Size:	60x110 mm	- Lamp Size:	60x110 mm
- Lifetime:	15000H	- Lifetime:	15000H
- Dimmable:	Yes	- Dimmable:	Yes
- Warranty:	2 years	- Warranty:	2 years
- Energy Star:	No	- Energy Star:	No

A19 9W CW		A19 9W WW	
- Power:	9W	- Power:	9W
- Voltage:	120V	- Voltage:	120V
- Lumens:	800	- Lumens:	800
- Lamp Base:	E26	- Lamp Base:	E26
- Beam Angle:	220°	- Beam Angle:	220°
- Power Factor:	>0.7	- Power Factor:	>0.7
- Lamp Size:	60x110 mm	- Lamp Size:	60x110 mm
- Lifetime:	15000H	- Lifetime:	15000H
- Dimmable:	No	- Dimmable:	No
- Warranty:	2 years	- Warranty:	2 years
- Energy Star:	No	- Energy Star:	No

A19 15WD CW		A19 15WD WW	
- Power:	15W	- Power:	15W
- Voltage:	120V	- Voltage:	120V
- Lumens:	1600	- Lumens:	1600
- Lamp Base:	E26	- Lamp Base:	E26
- Beam Angle:	230°	- Beam Angle:	230°
- Power Factor:	>0.8	- Power Factor:	>0.8
- Lamp Size:	60x115 mm	- Lamp Size:	60x115 mm
- Lifetime:	25000H	- Lifetime:	25000H
- Dimmable:	Yes	- Dimmable:	Yes
- Warranty:	2 years	- Warranty:	2 years
- Energy Star:	Yes	- Energy Star:	Yes

A19FIL 8WD CW		A19FIL 8WD WW	
- Power:	8W	- Power:	8W
- Voltage:	120V	- Voltage:	120V
- Lumens:	800	- Lumens:	800
- Lamp Base:	E26	- Lamp Base:	E26
- Beam Angle:	360°	- Beam Angle:	360°
- Power Factor:	>6.0	- Power Factor:	>6.0
- Lamp Size:	60x105 mm	- Lamp Size:	60x105 mm
- Lifetime:	25000H	- Lifetime:	25000H
- Dimmable:	Yes	- Dimmable:	Yes
- Warranty:	2 years	- Warranty:	2 years
- Energy Star:	Yes	- Energy Star:	Yes



LED Bulbs

E12 FIL 4WD CW		E12 FIL 4WD WW	
- Power:	4W	- Power:	4W
- Voltage:	120V	- Voltage:	120V
- Lumens:	400	- Lumens:	400
- Lamp Base:	E12	- Lamp Base:	E12
- Beam Angle:	360°	- Beam Angle:	360°
- Power Factor:	>0.5	- Power Factor:	>0.5
- Lamp Size:	35x98 mm	- Lamp Size:	35x98 mm
- Lifetime:	25000H	- Lifetime:	25000H
- Dimmable:	Yes	- Dimmable:	Yes
- Warranty:	2 years	- Warranty:	2 years
- Energy Star:	No	- Energy Star:	No

BR20 7WD CW		BR20 7WD WW	
- Power:	7.5W	- Power:	7.5W
- Voltage:	120V	- Voltage:	120V
- Lumens:	525	- Lumens:	525
- Lamp Base:	E26	- Lamp Base:	E26
- Beam Angle:	120°	- Beam Angle:	120°
- Power Factor:	>0.7	- Power Factor:	>0.7
- Lamp Size:	63x96 mm	- Lamp Size:	63x96 mm
- Lifetime:	15000H	- Lifetime:	15000H
- Dimmable:	Yes	- Dimmable:	Yes
- Warranty:	2 years	- Warranty:	2 years
- Energy Star:	Yes	- Energy Star:	Yes

BR30 COB 12WD CW		BR30 COB 12WD WW	
- Power:	12W	- Power:	12W
- Voltage:	120V	- Voltage:	120V
- Lumens:	1000	- Lumens:	1000
- Lamp Base:	E26	- Lamp Base:	E26
- Beam Angle:	120°	- Beam Angle:	120°
- Power Factor:	>0.7	- Power Factor:	>0.7
- Lamp Size:	96x133 mm	- Lamp Size:	96x133 mm
- Lifetime:	15000H	- Lifetime:	15000H
- Dimmable:	Yes	- Dimmable:	Yes
- Warranty:	2 years	- Warranty:	2 years
- Energy Star:	Yes	- Energy Star:	Yes

PAR16 COB 6W D CW		PAR16 COB 6W D WW	
- Power:	6.5W	- Power:	6.5W
- Voltage:	120V	- Voltage:	120V
- Lumens:	500	- Lumens:	500
- Lamp Base:	E26	- Lamp Base:	E26
- Beam Angle:	40°	- Beam Angle:	40°
- Power Factor:	>0.7	- Power Factor:	>0.7
- Lamp Size:	50x71.5 mm	- Lamp Size:	50x71.5 mm
- Lifetime:	15000H	- Lifetime:	15000H
- Dimmable:	Yes	- Dimmable:	Yes
- Warranty:	2 years	- Warranty:	2 years
- Energy Star:	Yes	- Energy Star:	Yes

PAR20 COB 8WD CW		PAR20 COB 8WD WW	
- Power:	8.5W	- Power:	8.5W
- Voltage:	120V	- Voltage:	120V
- Lumens:	520	- Lumens:	520
- Lamp Base:	E26	- Lamp Base:	E26
- Beam Angle:	40°	- Beam Angle:	40°
- Power Factor:	>0.7	- Power Factor:	>0.7
- Lamp Size:	66x87 mm	- Lamp Size:	66x87 mm
- Lifetime:	15000H	- Lifetime:	15000H
- Dimmable:	Yes	- Dimmable:	Yes
- Warranty:	2 years	- Warranty:	2 years
- Energy Star:	Yes	- Energy Star:	Yes



LED Bulbs

PAR30 COB 13WDS WW (Short neck)	
- Power:	13W
- Voltage:	120V
- Lumens:	800
- Lamp Base:	E26 (short neck)
- Beam Angle:	40°
- Power Factor:	>0.7
- Lamp Size:	94x89mm
- Lifetime:	15000H
- Dimmable:	Yes
- Warranty:	2 years
- Energy Star:	Yes

PAR30 COB 13WD CW	PAR30 COB 13WD WW
- Power:	13W
- Voltage:	120V
- Lumens:	800
- Lamp Base:	E26
- Beam Angle:	40°
- Power Factor:	>0.7
- Lamp Size:	94x117 mm
- Lifetime:	15000H
- Dimmable:	Yes
- Warranty:	2 years
- Energy Star:	Yes

G4 4WD CW	G4 4WD WW
- Power:	4W
- Voltage:	120V
- Lumens:	360
- Lamp Base:	G4
- Beam Angle:	360°
- Lamp Size:	43x16 mm
- Lifetime:	30000H
- Dimmable:	Yes
- Warranty:	2 years
- Energy Star:	No

G9 5W D CW	G9 5W D WW
- Power:	5W
- Voltage:	120V
- Lumens:	400
- Lamp Base:	G9
- Beam Angle:	360°
- Lamp Size:	55x16 mm
- Lifetime:	30000H
- Dimmable:	Yes
- Warranty:	2 years
- Energy Star:	No

G9 FIL 3WD WW	G9 FIL 3WD CW
- Power:	3W
- Voltage:	120V
- Lumens:	3K : 310/ 5K: 330
- Beam Angle:	360°
- Lamp Size:	50x59 mm
- Lifetime:	15000H
- Dimmable:	Yes
- Warranty:	2 years
- Energy Star:	No

GU10 6W D CW	GU10 6W D WW
- Power:	6.5W
- Voltage:	120V
- Lumens:	500
- Lamp Base:	GU10
- Beam Angle:	38°
- Lamp Size:	50x54 mm
- Lifetime:	15000H
- Dimmable:	Yes
- Warranty:	2 years
- Energy Star:	Yes



LED Puck Lights

PUK DPU 403 SN CW	PUK DPU 403 SN WW
PUK DPU 403 WH CW	PUK DPU 403 WH WW
PUK DPU 403 BK CW	PUK DPU 403 BK WW
PUK DPU 403 CH CW	PUK DPU 403 CH WW

- Puck Light LED Recessed Mount
- Surface mount adapter sold seperately
- Not suitable for damp location
- Compatible drivers: OT-08D/ OT-24D/ OT-60D/ OT-96D
- Wattage: 2 Watt LED
- Lumens: 130
- Beam angle: 110°
- Dimmable: No
- Dimensions: 2-7/8" diameter
- Cutout: 2-1/4"
- Warranty: 2 years
- Lifetime: 50000
- Finish: Satin Nickel (SN)/ White (WH)/ Black (BK)/ Chrome (CH)
- Colour Temp.: 3000K (Warm White) / 5000K (Cool White)



* This is a recessed puck light. To use it as a surface mount/ adapter/ sleeve can be purchased seperately.



PUK SLIM WH CW	PUK SLIM SN CW
PUK SLIM WH WW	PUK SLIM SN WW

- Puck Light LED Recessed Mount
- Surface mount adapter sold seperately
- Not suitable for damp location
- Compatible drivers: OT-08D/ OT-24D/ OT-60D/ OT-96D
- Wattage: 1.5 Watt LED
- Lumens: 100
- Beam angle: 110°
- Dimmable: No
- Dimensions: 2-7/8" diameter
- Cutout: 2-3/8"
- Warranty: 2 years
- Lifetime: 50000
- Finish: Satin Nickel (SN)/ White (WH)
- Colour Temp.: 3000K (Warm White) / 5000K (Cool White)



* This is a recessed puck light. To use it as a surface mount/ adapter/ sleeve can be purchased seperately.




LED Puck Lights


PUK SS SN CW PUK SS SN WW	
- SuperSlim LED Puk - Compatible drivers: OT-08D/ OT-24D/ OT-60D/ OT-96D - Suitable for damp locations, under-cabinet mount and mounting inside cabinet - Wattage: 2.2 - Lumens: 150 - Voltage: 12V DC - Dimmable: No - Dimensions: 3" diameter - Cutout: 2-1/4" - Warranty: 3 years - Lifetime: 50000H - Finish: Satin Nickel (SN) - Colour Temp.: 3000K (Warm White) / 5000K (Cool White)	



PUK M-SN CW PUK M-SN WW PUK M-WH CW PUK M-WH WW PUK M-ORB CW PUK M-ORB WW	
- SuperSlim LED Puk - Compatible drivers: OT-08D/ OT-24D/ OT-60D/ OT-96D - Suitable for damp locations, under-cabinet mount and mounting inside cabinet - Wattage: 1W - Lumens: 70 - Voltage: 12V DC - Dimmable: No - Dimensions: 1-1/8" diameter - Cutout: 1-1/8" - Warranty: 3 years - Lifetime: 50000H - Finish: Satin Nickel (SN)/ White (WH)/ Oil Rubbed Bronze (ORB) - Colour Temp.: 3000K (Warm White) / 5000K (Cool White)	

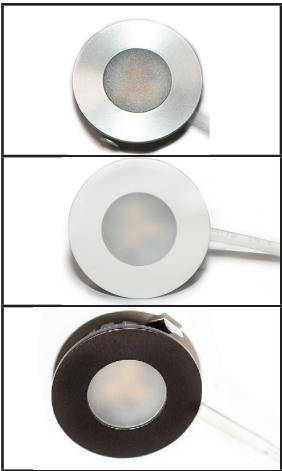

PUK M2G-SN CW PUK M2G-SN WW PUK M2G-WH CW PUK M2G-WH WW	
- 2" Mini LED Downlight - Indoor use only - Compatible drivers: OT-08D/ OT-24D/ OT-60D/ OT-96D - Wattage: 2W - Lumens: 180 - Voltage: 12V DC - Dimmable: No - Dimensions: 2-1/8" x 3/4" - Cutout: 1-1/2" - Warranty: 5 years - Lifetime: 50000 - Finish: Satin Nickel (SN)/ White (WH) - Colour Temp.: 3000K (Warm White) / 5000K (Cool White)	

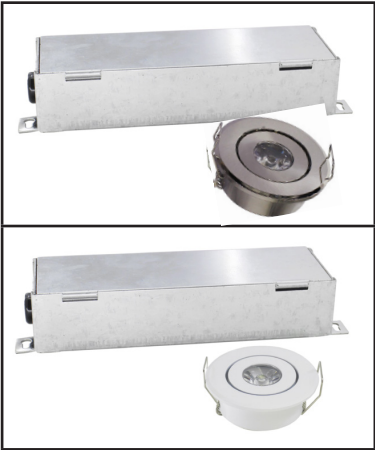

PUK M2GD-SN CW PUK M2GD-SN WW PUK M2GD-WH CW PUK M2GD-WH WW	
- 2" Mini LED Downlight - Comes with Driver - Indoor use only - Wattage: 2W - Lumens: 180 - Voltage: 12V DC - Dimmable: No - Dimensions: 2-1/8" x 3/4" - Cutout: 1-1/2" - Warranty: 5 years - Lifetime: 50000H - Finish: Satin Nickel (SN)/ White (WH) - Colour Temp.: 3000K (Warm White) /5000K (Cool White)	

PUK M3G-SN CW PUK M3G-SN WW PUK M3G-WH CW PUK M3G-WH WW	
- 3" Mini LED Downlight - Indoor use only - Compatible/ Dimmable with drivers: OT-08D/ OT-24D/ OT-60D/ OT-96D - Wattage: 3W - Lumens: 240 - Voltage: 12V DC - Dimmable: No - Dimensions: 2-3/4" x 1" - Cutout: 2-1/4" - Warranty: 5 years - Lifetime: 50000H - Finish: Satin Nickel (SN)/White (WH) - Colour Temp.: 3000K (Warm White) / 5000K (Cool White)	



PUK M3GD-SN CW PUK M3GD-SN WW PUK M3GD-WH CW PUK M3GD-WH WW	
- 3" Mini LED Downlight - Comes with Driver - Indoor use only - Wattage: 3W - Lumens: 240 - Voltage: 12V DC - Dimmable: No - Dimensions: 2-3/4" x 1" - Cutout: 2-1/4" - Warranty: 5 years - Finish: Satin Nickel (SN)/White (WH) - Colour Temp.: 3000K (Warm White) / 5000K (Cool White)	

LED Step Lights

RD12-1W CW		RD12-1W WW	
- Low Voltage Mini Step Light / Deck Light Engine - 1 Watt - 12V DC input voltage - Colour Temp.: 5000K(CW) / 2700K(WW) - Lens: Clear - Beam angle: 45° - Dimensions: ø 1-17/32" x 15/16" (ø 39 x 24mm) - Lumens: 85 - Warranty: 3 year - Lifetime: 50000H - IP66 Rated for indoor / outdoor - Spring clips to allow simple pressure fit installation - cETLus listed			



RD12-6LED CW		RD12-6LED WW	
- Low Voltage Mini Step Light / Deck Light Engine - 6 LED/ 0.4 Watt - 12V DC input voltage - Colour Temp.: 5000K(CW) / 2700K(WW) - Lens: Frosted - Beam angle: 90 degree - Dimensions: ø 1-17/32" x 25/32" (ø 39 x 19.5mm) - Lumens: 25 - Warranty: 3 year - Lifetime: 50000H - IP66 Rated for indoor / outdoor - Spring clips to allow simple pressure fit installation - cETLus listed			



LED Step Light Accessories

RDT12-1 SN
- Step Light Trim - Economy style - Satin Nickel Finish
SN

RDT12-2 SN	RDT12-2 ORB	RDT12-2 WH
- Step Light Trim - Premium style - Available in Oil rubbed Bronze (ORB) Satin Nickel (SN) White (WH)		
SN	ORB	WH

RDT12-3 SN	RDT12-3 ORB	RDT12-3 WH
- Square Light Trim - Round back thread - Available in : Oil rubbed Bronze (ORB) Satin Nickel (SN) White (WH)		
WH	ORB	SN


RDT12-4 SN	RDT12-4ORB	RDT12-4 WH
- Step Light Trim - Premium style with scoop - Available in Oil rubbed Bronze (ORB) Satin Nickel (SN) White (WH)		
SN	ORB	WH

LED Step Lights

<i>L0801-6-3K</i>		<i>L0801-6-5K</i>	
- Wattage:	2W		
- Voltage:	120V AC		
- Colour Temp.:	3000K/ 5000K		
- Lumens:	25		
- Lifetime:	50000H		
- Dimensions:	4-1/2" x 2-3/4"		
Comes with flexible vertical and horizontal plates in White			



<i>ST-1025 3K SN</i>		<i>ST-1025 5K SN</i>	
<i>ST-1025 3K WH</i>		<i>ST-1025 5K WH</i>	
<i>ST-1025 3K BK</i>		<i>ST-1025 5K BK</i>	
- Power :	2.5 W		
- Voltage:	120V AC		
- Lumens:	25		
- Lifetime:	35000H		
- Warranty:	3 years		
- Lifetime:	50000H		
- Outdoor Rated IP65			
- Dimensions:	4-1/2"x 2-3/4"		
- Vertical or Horizontal mounting			
- Finish :	Satin Nickel (SN)		
	White (WH)		
	Black (BK)		

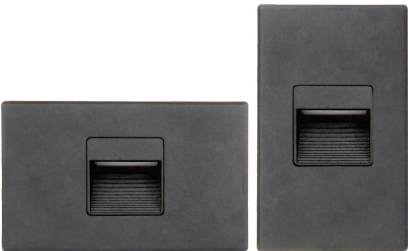

STR1W- 3K WH		STR1W- 5K WH	
STR1W- 3K SN		STR1W- 5K SN	
STR1W- 3K ORB		STR1W- 5K ORB	
- Step Light Round			
- Power :	1Watt		
- Cut out Diameter	1-1/4"		
- Finish :			
	3000K	Warm White (WH)	
		Oil rubbed Bronze (ORB)	
		Satin Nikel (SN)	
	5000K	Cool White (WH)	
		Oilrubbed Bronze (ORB)	
		Satin Nikel (SN)	



STS1W- 3K WH		STS1W- 5K WH	
STS1W- 3K SN		STS1W- 5K SN	
STS1W- 3K ORB		STS1W- 5K ORB	
- Step Light Square			
- Power :	1Watt		
- Cut out Diameter	1-1/4"		
- Finish :			
	3000K	Warm White (WH) Oil rubbed Bronze (ORB) Satin Nikel (SN)	
	5000K	Cool White (WH) Oilrubbed Bronze (ORB) Satin Nikel (SN)	



LED Strip Lights

SL-B3300-6	SL-B3300-6CW
- 6" Under-cabinet Strip - Satin Nickel Finish - Size: 152mm x 22.5mm x 11mm - Colour Temp.: 3000K/ 5000K - Wattage: 1.5W - Lumens: 90 - Warranty: 3 years - Lifetime: 50000H - Compatible/ Dimmable with Drivers: OT-08D/ OT-24D/ OT-60D/ OT-96D - Includes 3" connector	



SL-B3300-12	SL-B3300-12CW
- 12" Under-cabinet Strip - Satin Nickel Finish - Size: 302mm x 22.5mm x 11mm - Colour Temp.: 3000K/ 5000K - Wattage: 3W - Lumens: 200 - Warranty: 3 years - Lifetime: 50000H - Includes 3" connector - Compatible/ Dimmable with Drivers: OT-08D/ OT-24D/ OT-60D/ OT-96D	



SL-B3300-24	SL-B3300-24CW
- 24" Under-cabinet Strip - Satin Nickel Finish - Size: 610mm x 22.5mm x 11mm - Colour Temp.: 3000K/ 5000K - Wattage: 6W - Lumens: 400 - Warranty: 3 years - Lifetime: 50000H - Includes 3" connector - Compatible/ Dimmable with Drivers: OT-08D/ OT-24D/ OT-60D/ OT-96D	



SL-B3300-36	SL-B3300-36CW
- 36" Under-cabinet Strip - Satin Nickel Finish - Size: 914mm x 22.5mm x 11mm - Colour Temp.: 3000K/ 5000K - Wattage: 9W - Lumens: 600 - Warranty: 3 years - Lifetime: 50000H - Includes 3" connector - Compatible/ Dimmable with Drivers: OT-24D/ OT-60D/ OT-96D	



LED Strip Lights

SL-B3300-48	SL-B3300-48CW
- 48" Under-cabinet Strip - Satin Nickel Finish - Size: 1219mm x 22.5mm x 11mm - Colour Temp.: 3000K/ 5000K - Wattage: 12W - Lumens: 800 - Warranty: 3 years - Lifetime: 50000H - Includes 3" connector - Compatible/ Dimmable with Drivers: OT-24D/ OT-60D/ OT-96D	



Puk Sensor
- Closet sensor for puck / Strip lights - Compatible with SL-B3300



Linear Strip Lights



OL-ST4FT
- Power: 32W - Temperature: 4000k - Lumens (lm): 4160LM / W - Input Voltage: 100-277V - Dimmension: 48"x3.35"x3.56"

*Accessories SOLD seperately:



OL-ST8FT
- Power: 64W - Temperature: 4000k - Lumens (lm): 8320LM / W - Input Voltage: 100-277V - Dimmension: 96"x3.35"x3.56"

*Accessories SOLD seperately:



LED Strip Lights

SL-RGB5LO

- 5 Meter / 16.4 Feet flexible LED tape/ 60 LEDs/M
- Dimensions: 10mm / 1/2" wide/ 4.75mm / 3/16" tall
- IP65 Rated for indoor or outdoor use
- Beam angle: 120°
- Lifetime: 30000H
- Wattage : 12 Watt/meter
- Operating Temperature -20°C to 45°C
- Voltage: 12V DC Input voltage
- 20 colours/ 4 levels of brightness/ 4 modes
- White finish with clear silicone coating
- Cuttable every 50mm / 2" (PVC glue and termination caps sold seperatly)
- Mounted with 3M backing/ that adheres to any surface. (Additional clips sold seperatly/ transformer included)
- Warranty: 3 years



RGB-Puck Light

- LED RGB Puck Light - Recessed Mounted + Surface Mounted
- Diameter : 2-3/4" height : 5/8"
- Beam angle: 110
- Low profile design/ minimal heat emission
- Formed fixture
- Available in 16 colours and 4 play modes
- last colour memory functions
- Dimmable
- Reduced maintenance costs with LED components
- Suitable for household and residential applications
- Available in blister pack that includes 3 puck lights,1 Remote, 1 Driver



Remote

- RGB 24 keys wireless remote



Power Supply

- Power supply code included



Controller

- 16 static colour, 4 colour changing mode

SL-RGB 15M

- Watt : 8-10 W per meter
- Voltage: 120V
- Lumens: 780
- Dimensions : 7x14 mm
- Dimmable : Yes
- Mount : Clip or channel
- Lifetime: 50000H
- Warranty: 3 years

* Available in 16 colours and 4 play modes
last colour memory function

* Comes with Remote ,Controller and clips



SL-RGB 50M

- Roll Size Available: 50M
- Voltage: 110-130V AC
- Watts: 10 watts per Meter
- Light Source: 5050 SMD
- Size Dimensions: 7.5mm(H)x15(W)mm
- 0.5 cut mark/ unit
- IP67
- Dimmable: yes
- Warranty: 2 years



Accessories SOLD separately



Remote50M - SLRGB

Transformer+Remote for SL-RGB50M
1500W
can afford 50m120V or100m220v



RGB 50M - End Cap

- End Cap for RGB



RGB50M-CONN (L)

- L Connector for RGB



RGB50M-CONN

- Straight Connector for RGB



Remote 25M - SLRGB

Transformer+Remote for SL-RGB25M
750W
can afford 25m120V or50m220v



Mounting Clips

- Mounting Clips for RGB



RGB50M-CONN (T)

- T Connector for RGB

SL-25M 3K

SL-25M 5K

- 25 Meter length of flexible LED with 1500 LEDs
- 4.8W/M
- Light Spread: 140°
- Voltage: 12V DC
- Colour Temp.: 3000K/ 5000K
- Lumens: 318 - 420
- Size: 5000 x 8 x 3 mm
- Double sided tape on back for easy installation
- Should be cut to max 5M lengths for maximum brightness
- IP22 for indoor
- Warranty: 3 years



Accessories SOLD separately



SL-CONN

- Connectors for Strip Lights with 15cm wire



SL-CONN (TWO)

- Connectors for Strip Lights
- Double side snapon connector with 15cm wire



SL-CONN (SNAP)

- Connectors for Strip Lights
- Double side snap on connector

SL-50M 3K

SL-50M 5K

SL-50M Blue

- 10W/M
- Light Spread: 140°
- Voltage: 110 V AC-130V AC
- Colors: 3000K, 5000K, Blue
- Lumens: 780/m
- 50000 hours life time
- Size: 7 x14 mm
- 0.5 cutmark/unit
- IP67 for indoor and outdoor
- Warranty: 2 years



Accessories SOLD separately




SL50M-CORD

- CORD for SL50M



SL50M-CONN (T)

- T Connector for SL50M



SL50M-CONN

- Connector for SL50M



SL50M-CONN (L)

- L Connector for SL50M



Mounting Clips

- Mounting Clips for SL50M

Drivers

OT-08D

- Constant voltage

- 0.68A

- Input:

- Output :

- Maximum Wattage :

- Dimmable

- Suitable for dry or damp location/ IP20

- Suitable for LED Lighting and moving sign applications and others

- Class 2 Driver

100-130V AC

12V DC

8W



OT-24D

- Constant voltage

- 2A

- Input:

- Output :

- Maximum Wattage :

- Dimmable

- Suitable for dry or damp location/ IP20

- Suitable for LED Lighting and moving sign applications and others

-Class 2 Driver

100-130V AC

12V DC

24W



OT-60D

- Constant voltage

- 5A

- Input:

- Output :

- Maximum Wattage :

- Dimmable

- Suitable for dry or damp location/ IP20

- Suitable for LED Lighting and moving sign applications and others

-Class 2 Driver

108-127V AC

12V DC

60W



OT-96D

- 96 Watt

- Dimmable

- Input voltage: 100-240V AC

- Box Dimensions : 240x108x39 mm

- Class 2 Driver



OT-347

- 12 Watt Driver

- Dimensions : 82x82x33 mm

- Dimmable : No

- Class 2 Driver



OT-12150-TDWJ

- Voltage: 12V

- Wattage : 150

- High Power Factor PF>0.95

- Min.Load 10% only

- PWM output design

- 5 Years warranty

- Work for 100-277VAC input / 120V Dimmers and 277V dimmers/ allows for flicker free dimming down to 1%.

- Match with triac/electronic low voltage/ magnetic low voltage dimmers.



OT-24150-TDWJ

- Voltage: 24V

- Wattage : 150

- High Power Factor PF>0.95

- Min.Load 10% only

- PWM output design

- 5 Years warranty

- Work for 100-277VAC input / 120V Dimmers and 277V dimmers/ allows for flicker free dimming down to 1%.

- Match with triac/electronic low voltage/ magnetic low voltage dimmers.



OT-12200-TDWJ

- Voltage: 12V

- Wattage : 200

- High Power Factor PF>0.95

- Min.Load 10% only

- PWM output design

- 5 Years warranty

- Work for 100-277VAC input / 120V Dimmers and 277V dimmers/ allows for flicker free dimming down to 1%.

- Match with triac/electronic low voltage/ magnetic low voltage dimmers.



OT-24200-TDWJ

- Voltage: 24V

- Wattage : 200

- High Power Factor PF>0.95

- Min.Load 10% only

- PWM output design

- 5 Years warranty

- Work for 100-277VAC input / 120V Dimmers and 277V dimmers/ allows for flicker free dimming down to 1%.

- Match with triac/electronic low voltage/ magnetic low voltage dimmers.



OT-12300-TDWJ

- Voltage: 12V

- Wattage : 300

- High Power Factor PF>0.95

- Min.Load 10% only

- PWM output design

- 5 Years warranty

- Work for 100-277VAC input / 120V Dimmers and 277V dimmers/ allows for flicker free dimming down to 1%.

- Match with triac/electronic low voltage/ magnetic low voltage dimmers.



OT-24300-TDWJ

- Voltage: 24V

- Wattage : 300

- High Power Factor PF>0.95

- Min.Load 10% only

- PWM output design

- 5 Years warranty

- Work for 100-277VAC input / 120V Dimmers and 277V dimmers/ allows for flicker free dimming down to 1%.


- Match with triac/electronic low voltage/ magnetic low voltage dimmers.



2" LED Slim Lights

Slim 2-3K WH Slim 2-3K BK
Slim 2-5K WH Slim 2-5K BK

- 2" Round LED Slim light with driver in connection box
- Rated for damp locations
- IC rated for direct contact with insulation
- Durable aluminum body
- Dimmable up to 90% with most household dimmers
- Can be installed directly into drywall
- Class 2 transformer in junction box is included
- Wattage: 8W
- Lumens: 550
- Beam angle: 36°
- Dimensions: 3-1/8" diameter 2-3/4" depth (round)
- Cutout: 2-5/8"
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White (WH) / Black (BK)
- Colour Temp.: 3000K (Warm White) / 5000K (Cool White)

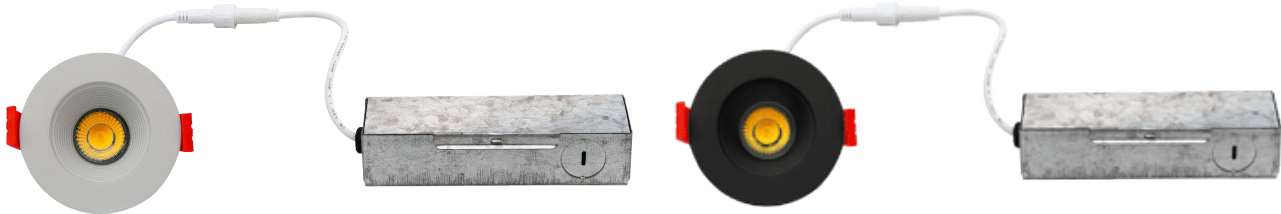

Disc 2S-3K WH Disc 2S-3K BK Disc 2S-3K SN + OT-Slim 2/3 (Driver)
Disc 2S-5K WH Disc 2S-5K BK Disc 2S-5K SN

- 2" Square LED Slim light with driver in connection box
- Rated for damp locations
- IC rated for direct contact with insulation
- Durable aluminum body
- Dimmable up to 90% with most household dimmers
- Can be installed directly into drywall
- Class 2 transformer in junction box is included
- Wattage: 8W
- Lumens: 550
- Beam angle: 36°
- Dimensions: 3-1/8" x 3-1/8" x 2-3/4" (square)
- Cutout: 2-5/8"
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White (WH) / Black (BK) / Satin Nickel (SN)
- Colour Temp.: 3000K (Warm White) / 5000K (Cool White)



3" LED Slim Lights

DISC3-3K WH + OT-Slim 2/3 (Driver)
DISC3--5K WH

- 3" Round LED Slim light with driver in connection box
- Suitable for damp locations where not directly exposed to rain or snow
- IC rated for direct contact with insulation
- Dimmable up to 90% with most household dimmers
- 120 degree beam angle
- Ceiling cutout size: 78mm
- Wattage: 8W
- Lumens: 500
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White (WH)
- Colour Temp.: 3000K (Warm White) / 5000K (Cool White)



3" Gimbal LED Slim Lights

Slim 3Gim-3K SN Slim 3Gim-3K ORB DISC 3Gim-3K WH + OT-Slim 2/3 (Driver)
Slim 3Gim-4K SN Slim 3Gim-4K ORB DISC 3Gim-5K WH
Slim 3Gim-5K SN Slim 3Gim-5K ORB DISC 3Gim-4K WH

- Recessed 3" Gimbal Round LED Slim light with driver in connection box
- Rated for damp locations
- IC rated for direct contact with insulation
- Durable aluminum body
- Dimmable upto 90% with most household dimmers
- Can be installed directly into drywall
- Class 2 transformer in junction box is included
- Wattage: 8W
- Lumens: 550
- Beam angle: 120°
- Dimensions: 3-1/2" diameter 1-3/4" height
- Cutout: 2-3/4"
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White (WH) or Satin Nickel (SN) / Oil Rubbed Bronze (ORB)
- Colour Temp.: 3000K (Warm White) / 4000K (Natural White)/ 5000K (Cool White)



3" Regressed Lights

DISC-RG3-3K WH + OT-Slim 2/3 (Driver)
DISC-RG3-5K WH

- Regressed 3" LED light
- Triac dimming range 10-100%
- This fixture is compatible with industry standard TRIC/ ELV drivers
- IC rated when used with recessed housing rated for direct contact with insulation
- Durable aluminum construction
- Wattage: 8W
- Lumens: 550
- Beam angle: 38°
- CRI: 80
- Dimensions: 5" diameter 2-1/8" height
- Cutout: 3-3/8"
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White (WH)
- Colour Temp.: 3000K (Warm White) or 5000K (Cool White)



4" LED Slim

Disc 4-3K WH
Disc 4-4K WH
Disc 4-5K WH

+


OT-Slim 4 (Driver)

- 4" Round LED Slim light with driver in connection box
- This light is rated for damp locations
- It is IC rated for direct contact with insulation
- Durable aluminum body
- These are dimmable upto 90% with most household dimmers
- It can be installed directly into drywall
- Class 2 transformer in junction box is included
- Wattage: 9W
- Lumens: 550
- Beam angle: 120°
- Voltage: 120V AC
- Dimensions: 4-1/8" diameter 1" depth
- Cutout: 4-1/4"
- Warranty: 5 years
- Finish: White (WH)
- Colour Temp.: 3000K (Warm White)
- 4000K (Natural White)
- 5000K (Cool White)



Choose your favourite colour to put on the Slim/Disc light from these rings!/


Slim 4-Rings

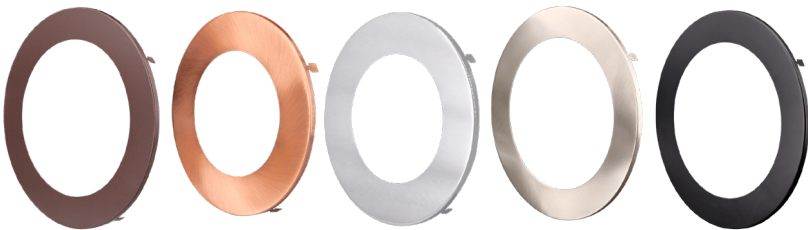

Slim4-Ring BR Slim4-Ring CP Slim4-Ring CH Slim4-Ring SN Slim4-Ring BK

Slim 4S-3K WH Slim 4S-3K SN
Slim 4S-4K WH Slim 4S-5K SN
Slim 4S-5K WH

- 4" Square LED Slim light with driver in connection box
- This light is rated for damp locations
- It is IC rated for direct contact with insulation
- Durable aluminum body
- These are dimmable upto 90% with most household dimmers
- It can be installed directly into drywall
- Class 2 transformer in junction box is included
- Wattage: 9W
- Lumens: 550
- Beam angle: 120°
- Voltage: 120V AC
- Dimensions: 4-3/4" x 4-3/4" x 1-1/2" depth
- Cutout: 4-1/4"
- Warranty: 5 years
- Finish: White (WH) / Satin Nickel (SN)
- Colour Temp.: 3000K (Warm White)
- 4000K (Natural White)
- 5000K (Cool White)

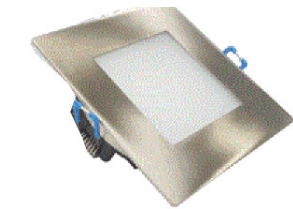

+



4" LED Drop Down Slim Lights

SLIM4-DD3KWH SLIM4-DD5KWH

- 4" Round LED drop light with driver in connection box
- This light is rated for damp locations where not directly in contact with water or snow
- It is IC related for direct contact with insulation
- Slim lights are durable and have aluminum body
- These are dimmable upto 90% with most household dimmers
- It can be installed directly into drywall
- Class 2 transformer in junction box is included
- Wattage: 12W
- Lumens: 900
- Beam angle: 24°
- Voltage: 12V
- Dimensions: 5-1/10" diameter 3.15" depth
- Cutout: 4-5/16"
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White (WH)
- Colour Temp.: 3000K (Warm White)
- 5000K (Cool White)



4" Gimbal LED Slim Lights

Slim 4Gim-3K WH Slim 4Gim-3K SN
Slim 4Gim-4K WH Slim 4Gim-4K SN
Slim 4Gim-5K WH Slim 4Gim-5K SN

- Recessed 4" Gimbal LED Slim light
- Rated for damp locations
- IC rated for direct contact with insulation
- Round/ durable aluminum body
- Dimmable upto 90% with most household dimmers
- Installed directly into drywall
- Class 2 transformer in junction box is included
- Wattage: 9W
- Lumens: 550
- Beam angle: 110° beam with 30° tilt and 180° rotation
- Dimensions: 4-7/8" diameter 2" depth
- Cutout: 4-1/8" (round)
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White (WH) or Satin Nickel (SN)
- Colour Temp.: 3000K (Warm White)
- 4000K (Natural White)
- 5000K (Cool White)



4" LED Indirect Slim Lights

<i>Slim 4ID -3.22K WH</i>	<i>Slim 4ID -5.40K WH</i>
---------------------------	---------------------------

- Recessed 4"Indirect Round LED Slim light with driver in connection box
- Rated for damp locations
- IC rated for direct contact with insulation
- Round/ durable aluminum body
- Dimmable upto 90% with most household dimmers
- Installed directly into drywall
- Class 2 transformer in junction box is included
- Wattage: 9W
- Lumens: 550
- Beam angle: 120°
- Dimensions: 4-3/4" diameter 1-1/2" depth
- Cutout: 4-1/4"
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White
- Colour Temp.: Dims from 3000K to 2200K / 5000K to 4000K



4" Regressed Lights

<i>OLT2-412-3K WH</i>	<i>OLT2-412-5K WH</i>
-----------------------	-----------------------

- Durable aluminum construction
- Triac dimming range 10-100%, This fixture is compatible with industry standard TRIC/ ELV dimmers (contact factory for listing of compatible dimmers)
- IC rated when used with recessed housing rated for direct contact with insulation
- Wattage: 12W
- Lumens: 700
- CRI: 80
- Input Voltage: 120V AC 60 Hz
- Beam angle: 60 °
- Dimming: TRIAC Dimmers 10% - 100%
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White (WH)
- Colour Temp.: 3000K (Warm White) / 5000K (Cool White)



<i>OLT2-RG412-3K WH</i>


- Regressed LED fixtures with integral LEDs and built-in driver.
- Commercial Grade Quality With Architectural Design
- Triac dimming range 5%-100%
- This fixture is compatible with industry standard TRIC/ ELV drivers
- Durable aluminum construction
- Wattage: 12W
- Lumens: 700
- Input Voltage: 120V AC 50/60 Hz
- CRI: 80
- Beam angle: 92°
- Dimming: TRIAC Dimmers 5% - 100%
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White (WH)
- Colour Temp.: 3000K (Warm White)



6" LED Slim Lights

<i>Disc 6-3K WH</i>	<i>Disc 6-3K BK</i>	+	<i>OT-Slim 6 (Driver)</i>
<i>Disc 6-4K WH</i>	<i>Disc 6-5K BK</i>		
<i>Disc 6-5K WH</i>			

- 6" Round LED Slim light
- Rated for damp locations
- IC rated for direct contact with insulation
- Durable aluminum body
- Dimmable up to 90% with most household dimmers
- Can be installed directly into drywall
- Class 2 transformer in junction box is included
- Wattage: 12W
- Lumens: 700
- Beam angle: 120°
- Dimensions: 6-7/8" diameter 1" depth
- Cutout: 6-1/4"
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White (WH)
- Colour Temp.: Satin Nickel (round) 3000K (Warm White) 5000K (Cool White)

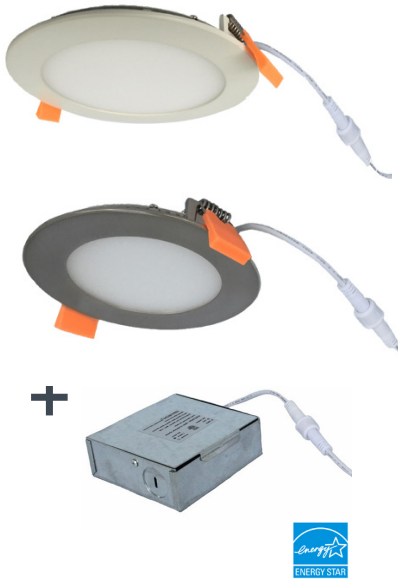

Choose your favourite colour to put on the light from these rings!



6" LED Indirect Slim Lights

<i>Slim 6ID -3.22K WH</i>	<i>Slim 6ID -5.40K WH</i>
---------------------------	---------------------------

- 6" Round LED Indirect Slim light
- Rated for damp locations
- IC rated for direct contact with insulation
- Durable aluminum body
- Dimmable up to 90% with most household dimmers
- Can be installed directly into drywall
- Class 2 transformer in junction box is included
- Wattage: 12W
- Lumens: 700
- Beam angle: 20°
- Dimensions: 6-3/4" diameter 2" depth
- Cutout: 6-1/4"
- Warranty: 5 years
- Lifetime: 50000H
- Finish: White
- Colour Temp.: Dims from 3000K to 2200K / 5000K to 4000K



LED Closet Lights

1051-3K GR 1051-4K GR		1051-3K WH 1051-4K WH	
- Wattage:		9 W	
- Lumens:		900	
- Colour Temp.:		Warm White/ Cool White	
- Damp Location rated			
- Ceiling or Wall mounts			
- Lifetime:		50000 hours	
- Ideal for closets, storage rooms, attics, basements, stair wells, outdoor covered areas			
- Warranty:		3 years	
1051-S3K GR		1051-S3K WH	1051-S4K WH
- Wattage:		9 W	
- Lumens:		900	
- Colour Temp.:		Warm White/ Cool White	
- Damp Location rated			
- Ceiling or Wall mounts			
- Lifetime: 50000 hours			
- Ideal for closets, storage rooms, attics, basements, stair wells, outdoor covered areas			
- Lights turn on automatically when motion is detected and turns off after 3 minutes when no motion is detected			
- Warranty:		3 years	



LED Vapour Tights

VT-48W 4000K	
- Vapour Tight	
- Wattage:	48W
- Voltage:	120-277V
- Lumens:	5040lmn
- No Dimmable sensor	
VT-48WDS 4000K	
- Vapour Tight	
- Wattage:	48W
- Voltage:	120-277V
- Lumens:	5040lmn
- With Dimmable sensor	



LED Batten Lights

BL-2ft 3000K		BL-2ft 5000K	
- LED batten lights - 2 feet			
- Wattage :		20W	
- Voltage:		100-277V	
- Lumens:		2200	
- Available in 3000K / 5000K			
- ETL And DLC Approved Size: 2Ft.			
- Version Design: Independent Version			
- Ceiling Mount And Hanging			
- Warranty:		3 years	
BL-4ft 3000K		BL-4ft 5000K	
- LED batten lights - 4 feet			
- Wattage :		40W	
- Voltage:		100-277V	
- Lumens:		4400	
- Available in 3000K / 5000K			
- ETL And DLC Approved Size: 4Ft.			
- Version Design: Independent Version			
- Ceiling Mount And Hanging			
- Warranty:		3 years	



LED Security Lights

OL-1H WH		OL-1H GR		OL-1H BR	
- Security Light					
- Head:		1			
- Size:		225x145x117 mm			
- Wattage:		11.5W			
- Lumens:		1200			
- Colours:		White/ Grey/ Brown			
- Warranty:		5 years			
OL-2H WH		OL-2H GR		OL-2H BR	
- Security Light					
- Head:		2			
- Size:		196x324x132mm			
- Wattage:		11.5W per head			
- Lumens:		1200 per head			
- Colours:		White/ Grey/ Brown			
- Warranty:		5 years			
OL-2HS WH		OL-2HS GR		OL-2HS BR	
- Security Light with sensor					
- Head:		2			
- Size:		324x196x163mm			
- Wattage:		11.5W per head			
- Lumens:		1200 per head			
- Sensor detecting range: Max. 50ft (15m) front					
- Time on adjustment: 5seconds, 1min., 5min., 12min. (slide switch)					
- Lux settings: Night, Dusk, Day (slide switch)					
- Sensor adjustment: Min., Mid., Max.					
- Colours:		White/ Grey/ Brown			
- Warranty:		5 years			
OL-SWH					
- White Security Light sensor					
- Sensor detecting range: Max. 50ft (15m) front					
- Size:		87.6x104.14x79.82mm			
- IP54 rated (outdoor use)					
- Time on adjustment: 5seconds/ 1min./ 5min./ 12min. (slide switch)					
- Lux settings: Night, Dusk, Day (slide switch)					
- Sensor adjustment: Min., Mid., Max.					
- Colours:		White/ Grey/ Brown			
- Warranty:		5 years			
OE-212BP					
Rated Voltage :		AC 120V-347A 50/60Hz			
Input current :		0.02A			
Input Voltage :		3W-7W			
Output Voltage :		DC6.0V			
Output Wattage :		MAX:36W			
Emergency duration:		2x2W>4hours; 36W-30mins			
Fuse installed or replaced :		10A/250V & 0.5A 350V			
Battery installed or replaced sealed lead battery 6V 6Ah					
LED built-in :		45°45/2°2W/ LED			
Charging time:		20hours			
For use in 5°C min. 30°C max. temp.					
Suitable for damp locations					
Warranty:		3years			



LED Exit Signs

OE-126	
- Input Voltage:	120/347 VAC/ 60Hz
- Battery:	Ni-Cd 3.6V 1.0Ah
- Lamp:	SMD2835 x14
- Output power:	2W
- Injection molded thermoplastic ABS housing	
- Innovative/ snap-together design allows for fast and easy installation	
- Universal mounting(wall/ side and ceiling)	
- Battery backup for 90 minutes emergency duration	
- Warranty:	3 years

OE-DC126	
- Injection-molded thermoplastic ABS housing	
- UL-94-0 flame rating/ fire-retardant	
- Wall/ ceiling and end mounting	
- Input Voltage:	120/347V AC, 3.6-24V DC
- No battery	
- Test switch charge indicator light	
- Overcharge and over-discharge protection	
- Backup time: > 90mins.	
- Warranty:	3 years

OE-316	
- Input Voltage:	120/347 VAC/ 60Hz
- Battery:	Ni- Cd 3.6V 2.0Ah
- Lamp:	Exit Sign: SMD2835 x 14 Light Head: 1W x 2
- Injection molded themoplastic ABS housing	
- 2x1W LED adjustable heads	
- Innovative/ snap-together design allows for fast and easy installation	
- Battery backup for 90minutes emergency duration	
- Universal mounting (Wall/ side and ceiling)	
- Warranty: 3 years	

OE-G026	
- Input Voltage: 120/347V AC dual voltage operation	
- NiCad Battery	
- Test switch and charge indicator light	
- Battery backup for 90minutes emergency duration	
- Universal mounting (Wall/ side and ceiling)	
- Warranty: 3 years	

OE-703H	
- Wall and ceiling mounting	
- Input Voltage:	3.6-24V
- Super bright SMD LED 2x2W	
- Injection - molded thermoplastic ABS housing	
- Insulation: II/ Range : 80m2 / 860 sq. ft	

OE-703-1H	
- Injection-molded thermoplastic ABS housing	
- UL-94-0 flame rating/ fire-retardant	
- Wall/ ceiling and end mounting	
- Input Voltage:	3.6-24V DC
- IP Class: IP20	
- Insulation: II/ Range: 80m2	

OE-212	
-Input Voltage:120/277V/ 60HZ	
-Battery: Ni-cd 3.6V 1.0Ah	
-Lamp: 2 x 1.2W LED	
-Emergency operation time: 90mintues	
-Product Size:402 x 104 x 130.5MM	
-Material: thermoplastic ABS housing	
-Warranty: 3 years	




LED Wall Pack with Photo Cell

WP-PC 38W 4000K
- LED Wall Pack with Photo Cell
- Waterproof breathable technology to maintain stable atmospheric pressure
- Suitable for wet location
- Angle adjustable
- Wattage: 38W
- Voltage: 120-277V
- Temperature: 4000k
- Lumens: 3500LM

WP-PC 20W 4000K
- LED Wall Pack with Photo Cell
- Waterproof breathable technology to maintain stable atmospheric pressure
- Suitable for wet location
- Angle adjustable
- Wattage: 20W
- Voltage: 120-277V
- Temperature: 4000k
- Lumens: 2100LM

WP-PC 50W 4000K
- LED Wall Pack with Photo Cell
- Waterproof breathable technology to maintain stable atmospheric pressure
- Suitable for wet location
- Angle adjustable
- Wattage: 50W
- Voltage: 120-277V
- Temperature: 4000k
- Lumens: 6000LM

WP-PC 70W 4000K
- LED Wall Pack with Photo Cell
- Waterproof breathable technology to maintain stable atmospheric pressure
- Suitable for wet location
- Angle adjustable
- Wattage: 70W
- Voltage: 120-277V
- Temperature: 4000k
- Lumens: 7700LM

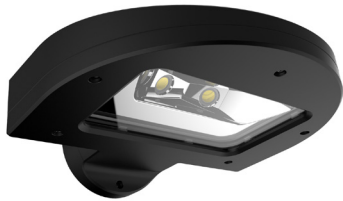

LED FLOOD LIGHT

FL-G1 50W 4000K	
- Wattage:	50W
- Voltage:	120-277V
- Temperature:	4000k
- Lumens:	4900LM



LED High Bay

HB-100W	
- Power Usage:	100W
- Lumens:	13000 lmn
- Input Voltage:	AC 100-277V
- CCT:	4000K
- Beam Angle:	90°
- Reflector:	Aluminium
- Warranty:	5 years
- 4 ft chain and installation adjustable bracket	



HB-150W	
- Power Usage:	150W
- Lumens:	19500 lmn
- Input Voltage:	AC 100-277V
- CCT:	4000K
- Beam Angle:	90°
- Reflector:	Aluminium
- Warranty:	5 years
- 4 ft chain and installation adjustable bracket	



HB-200W	
- Power Usage:	200W
- Lumens:	26000 lmn
- Input Voltage:	AC 100-277V
- CCT:	4000K
- Beam Angle:	90°
- Reflector:	Aluminium
- Warranty:	5 years
- 4 ft chain and installation adjustable bracket	



LED Linear High Bay



OL-HB2-110W	
- Size:	2ft
- Power:	110
- Temperature:	4000k
- Lumens (lm):	130Lm / W
- Input Voltage:	120-277V
- Dimmension:	23.82"x12.60"x0.83"
Suitable for day/damp locations	
*Accessories SOLD seperately: Pendant Hanger Wire Guard (604"x334"x18mm)	

OL-HB3-165W	
- Size:	2ft
- Power:	165W
- Temperature:	4000k
- Lumens (lm):	130Lm / W
- Input Voltage:	120-277V
- Dimmension:	17.32"x12.60"x0.83"
Suitable for day/damp locations	
*Accessories SOLD seperately: Pendant Hanger Wire Guard (604"x454"x18"mm)	




OL-HB5-165W	
- Size:	4ft
- Power:	165W
- Temperature:	4000
- Lumens (lm):	130Lm / W
- Input Voltage:	120-277V
- Dimmension:	45.87"x12.60"x0.83"
Suitable for dry/damp locations	
*Accessories SOLD seperately: Pendant Hanger Wire Guard (1165"x334"x18"mm)	

OL-HB5-225W	
- Size:	4ft
- Power:	225W
- Temperature:	4000k
- Lumens (lm):	130Lm / W
- Input Voltage:	120-277V
- Dimmension:	45.87"x12.60"x0.83"
Suitable for dry/damp locations	
*Accessories SOLD seperately: Pendant Hanger Wire Guard (1165"x334"x18"mm)	

Accessories SOLD seperately:

Pendant Hanger

Wire Guard

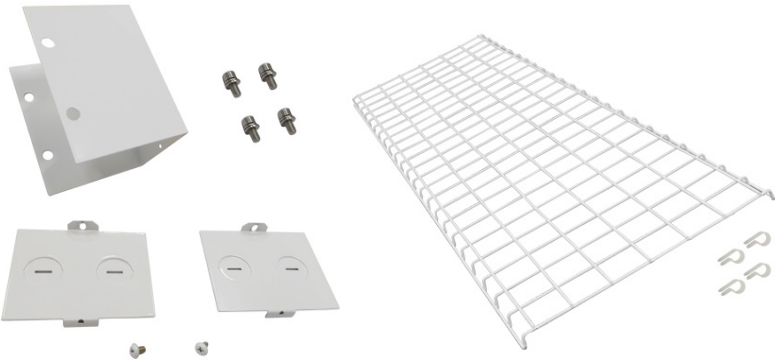

LED Troffers

TF-2x2D 4000K	
- Size:	2x2ft
- Dimmable :	yes
- Lamp Watt:	34W
- Input Voltage:	120-277
- Lumens:	3550
- CRI:	80
- Lifetime:	50000H
- Power Factor:	>0.9
- CCT:	4000K
- Warranty:	5years

TF-2x4D 4000K	
- Size:	2x4ft
- Dimmable	yes
- Lamp Watt:	65W
- Input Voltage:	120-277
- Lumens:	7000
- CRI:	80
- Lifetime:	50000H
- Power Factor:	>0.9
- CCT:	4000K
- Warranty:	5years




LED Panels

OD-1x4D3K	OD-1x4D4K	OD-1x4D5K
- LED Panel Lights		
- Dimmable		
yes		
- Lumens:		
4000		
- Wattage:		
40W		
- Input Voltage:		
120-277 V		
- Colour Temp.:		
3000K, 4000K , 5000K		
- CRI:		
80		
- Beam Angle:		
150 degree		
- Warranty:		
5 years		

OD-2x2D3K	OD-2x2D4K	OD-2x2D5K
- LED Panel Lights		
- Dimmable		
yes		
- Lumens:		
4000		
- Wattage:		
40W		
- Input Voltage:		
120-277 V		
- Colour Temp.:		
3000K, 4000K , 5000K		
- CRI:		
80		
- Beam Angle:		
150 degree		
- Warranty:		
5 years		

OD-2x4D3K	OD-2x4D4K	OD-2x4D5K
- LED Panel Lights		
- Dimmable		
yes		
- Lumens:		
5000		
- Wattage:		
50W		
- Input Voltage:		
120-277 V		
- Colour Temp.:		
3000K, 4000K , 5000K		
- CRI:		
80		
- Beam Angle:		
150 degree		
- Warranty:		
5 years		

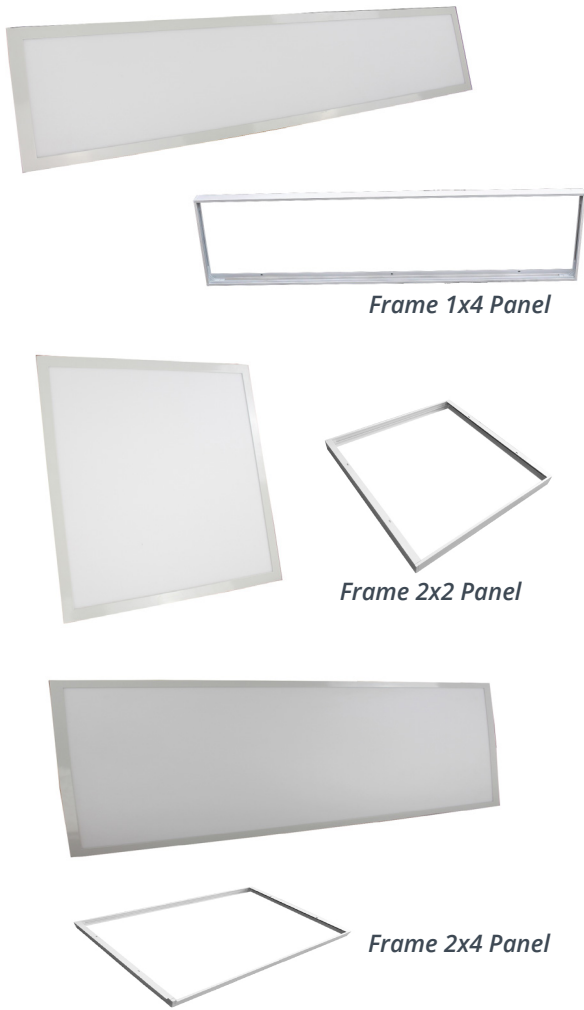

LED Flush Mounts


2135-3K WH	2135-5K WH
- LED Flush Mount	
- Wattage:	
6Watts	
- Lumens:	
400 lmns	
- Voltage:	
120V AC	
- Diameter:	
4" Height: 0.5"	
- Colour temp.:	
3000K or 5000K	
- Lifetime:	
50 000 hours	
- Warranty:	
5 years	
- Available in :	
White (WH)	

		
2135-Ring BK	2135-Ring CBK	2135-Ring VB
- Magnetic Black ring	- Magnetic Chrome Black ring	- Magnetic Vintage Brass ring

2180-3K WH	2180-5K WH
- LED Flush Mount	
- Wattage :	
12W	
- Lumens :	
960	
- Voltage:	
120V AC	
- Colour Temp.:	
3000K / 5000K	
- Diameter:	
7" Height: 0.5"	
- Lifetime:	
50000H	
- Warranty:	
5 years	
- Available in :	
White (WH)	

			
2180-Ring BK	2180-Ring CBK	2180-Ring VB	2180-Ring SN
- Magnetic Black ring	- Magnetic Chrome Black ring	- Magnetic Vintage Brass ring	- Magnetic Satin Nickel ring

2180S-3K WH	2180S-5K WH
- LED Flush Mount	
- Wattage :	
12W	
- Lumens :	
960	
- Voltage:	
120V AC	
- Colour Temp.:	
3000K / 5000K	
- Dimensionr:	
7" Height: 0.5"	
- Lifetime:	
50000H	
- Warranty:	
5 years	
- Available in :	
White (WH)	

				
2180S-Ring BK	2180S-Ring CH	2180S-Ring VB	2180S-Ring SN	2180S-Ring CBK
- Magnetic Black ring	- Magnetic Chrome ring	- Magnetic Vintage Brass ring	- Magnetic Satin Nickel ring	- Magnetic Chrome Black ring




2225-3K WH	2225-5K WH
- LED Flush Mount - Wattage : 18W - Lumens : 1500 - Voltage: 120V AC - Colour Temp.: 3000K / 5000K - Diameter: 9" Height: 0.5" - Lifetime: 50000H - Warranty: 5 years - Available in : White(WH)	



				
2225-Ring BK	2225-Ring CBK	2225-Ring VB	2225-Ring SN	2225-Ring CH
- Magnetic Black ring	- Magnetic Chrome Black ring	- Magnetic Vintage Brass ring	- Magnetic Satin Nickel ring	- Magnetic Chrome ring

2225S-3K WH	2225S-5K WH
- LED Flush Mount - Wattage : 18W - Lumens : 1500 - Voltage: 120V AC - Colour Temp.: 3000K / 5000K - Dimensionr: 9" Height: 0.5" - Lifetime: 50000H - Warranty: 5 years - Available in : White (WH)	




				
2225S-Ring BK	2225S-Ring CH	2225S-Ring SN	2225S-Ring VB	2225S-Ring CBK
- Magnetic Black ring	- Magnetic Chrome ring	- Magnetic Satin Nickel ring	- Magnetic Vintage Brass ring	- Magnetic Chrome Black ring


2300-3K WH	2300-5K WH
- LED Flush Mount - Wattage : 24W - Lumens : 2100 - Voltage: 120V AC - Colour Temp.: 3000K / 5000K - Diameter: 12" Height: 0.5" - Lifetime: 50000H - Warranty: 5 years - Available in : White (WH)	




			
2300-Ring BK	2300-Ring SN	2300-Ring CBK	2300-Ring VB
- Magnetic Black ring	- Magnetic Satin Nickel ring	- Magnetic Chrome Black ring	- Magnetic Vintage Brass ring

2300S-3K WH	2300S-5K WH
- LED Flush Mount - Wattage : 24W - Lumens : 2100 - Voltage: 120V AC - Colour Temp.: 3000K / 5000K - Dimension: 12" Height: 0.5" - Lifetime: 50000H - Warranty: 5 years - Available in : White (WH)	



		
2300S-Ring BK	2300S-Ring CH	2300S-Ring VB
- Magnetic Black ring	- Magnetic Chrome ring	- Magnetic Vintage Brass ring

	
2300S-Ring SN	2300S-Ring CBK
- Magnetic Satin Nickel ring	- Magnetic Chrome Black ring

2400-3K WH	2400-5K WH
- Product Size(mm): Ø407x25mm - Power: 30W - Lumens (lm): 100LM / W - Dimension: 16" Height: 0.5" - Input Voltage: AC120V - CRI: Ra80 - Beam Angle(°): 120° - Dimmable: Yes Color Temperature: 3k (Warm White) 5k (Cool White)	



LED Flush Mounts

1301-12BK3K	1301-12CH3K	1301-12ORB3K	1301-12SN3K	1301-12SN4K
1301-12BK5K	1301-12CH5K	1301-12ORB5K	1301-12SN5K	

- LED Flush Mount 12"x 3.5"
- Dimmable
- Wattage:15 W
- Lumens:1200
- Voltage:120V AC
- Colour Temp.:3000K / 5000K
- Diameter:12" Height: 3.5"
- Lifetime:50000H
- Warranty:2 years
- Colour Finish:Black / Chrome / Satin Nickel / Oil Rubbed Bronz

1302-16BK3K	1302-16CH3K	1302-16ORB3K	1302-16SN3K	1302-16SN4K
1302-16BK5K	1302-16CH5K	1302-16ORB5K	1302-16SN5K	

- LED Flush Mount 16"x 4.5"
- Dimmable
- Wattage:25 W
- Lumens:2000
- Voltage:120V AC
- Colour Temp.:3000K / 5000K
- Diameter:16" Height: 4.5"
- Lifetime:50000H
- Warranty:2 years
- Colour Finish:Black / Chrome / Satin Nickel / Oil Rubbed Bronz

1303-18BK3K	1303-18CH3K	1303-18ORB3K	1303-18SN3K
1303-18BK5K	1303-18CH5K	1303-18ORB5K	1303-18SN5K

- LED Flush Mount 18x 4.5"
- Dimmable
- Wattage :25W
- Lumens :2300
- Voltage:120V AC
- Colour Temp.:3000K / 5000K
- Diameter:18" Height: 4.5"
- Lifetime:50000H
- Warranty:2 years
- Colour Finish:Black / Chrome / Satin Nickel / Oil Rubbed Bronz

1304-24BK3K	1304-24CH3K	1304-24ORB3K	1304-24SN3K
1304-24BK5K	1304-24CH5K	1304-24ORB5K	1304-24SN5K

- LED Flush Mount 24" x 4.5"
- Dimmable
- Wattage :35W
- Lumens :3100
- Voltage:120V AC
- Colour Temp.:3000K / 5000K
- Diameter:24" Height: 4.5"
- Lifetime:50000H
- Warranty:2 years
- Colour Finish:Black / Chrome / Satin Nickel / Oil Rubbed Bronz

1701-12SN	1701-12SN4	1701-12SN5
-----------	------------	------------

- LED Flush Mount
- Dimmable
- Wattage :15W
- Lumens :1050
- Voltage:120V AC
- Colour Temp.:3000K / 4000K/ 5000K
- Diameter:11" Height: 2.4"
- Lifetime:50000H
- Warranty:2 years
- Colour Finish:Satin Nickel Finish

1702-14SN	1702-14SN4	1702-14SN5
-----------	------------	------------

- LED Flush Mount
- Dimmable
- Wattage :22W
- Lumens :1400
- Voltage:120V AC
- Colour Temp.:3000K / 4000K/ 5000K
- Diameter:14" Height: 2.4"
- Lifetime:50000H
- Warranty:2 years
- Colour Finish:Satin Nickel Finish



LED Flushmount in Chrome



LED Flushmount in Satin Nickel



LED Flushmount in Black



LED Flushmount in Oil Rubbed Bronze



Accessories

SO8521LED

- Wall plate Night Light
- Built-in light and motion sensor
- Suit for decor socket
- Light on or off automatically according to the light and motion
- Input: 120V AC
- Reaction Area: 150 degree
- Lumens: 20
- Compatible with 15A and 20A Decor Outlets
- Warranty: 2 years



SO8521USB

- Dual USB ports
- No wire/ No battery
- Input: 100V-130V
- Rated Power: 15A/120V
- Output: 5V 3.1A(total)
- Compatible with 15A and 20A standard Outlets
- Warranty: 2 years



DMD-ELV

- Electronic Low Voltage Dimmer Switch
- Diming Capacity :10% - 100%
- Wallplate sold separately
- Single Pole / 3 Way Dimmer
- 300W
- 120VAC/ 60 Hz
- Colour : White



DMD LED

- LED / CFL Bulb Dimmer Switch
- For use with Dimmable LED/ CFL/ Halogen and Incandescent bulbs
- Diming Capacity :10% - 100%
- Wallplate sold separately
- Single Pole / 3 Way Dimmer
- 150W Dimmable LED/CFL
- 700W Incandescent
- 120V AC/ 60 Hz
- With sensitivity slider
- Colour : White






Accessories

VB-S4
- Vapor Barrier for 4" Slim Lights - Dimensions: 465x215x146mm
VB-S6
- Vapor Barrier for 6" Slim Lights - Dimensions: 385x255x109mm
VB-6-S
- Vapor Barrier - Dimensions: 515x470x673mm
Cord 24"
- 24" extension cord for Ortech Slim/ Disc lights
Cord 60"
- 60" extension cord for Ortech Slim / Disc lights
Cord 120"
- 120" extension cord for Ortech Slim / Disc lights
Cord 240"
- 240" extension cord for Ortech Slim / Disc lights




Metal Plates

Plate26-3
- Premounting Metal Plate for Slim / Disc 3"
Plate26-4
- Premounting Metal Plate for Slim / Disc 4"
Plate26-6
- Premounting Metal Plate for Slim/Disc 6"
Plate 3-HB
- 3" Plate for Slim Light with 4-way Hanger Bar
Plate 4-HB
- 4" Plate for Slim Light with 4-way Hanger Bar
Plate 6-HB
- 6" Plate for Slim Light with 4-way Hanger Bar

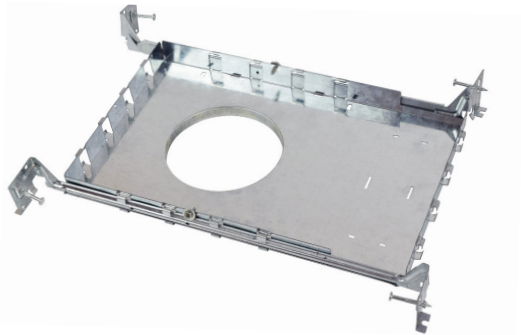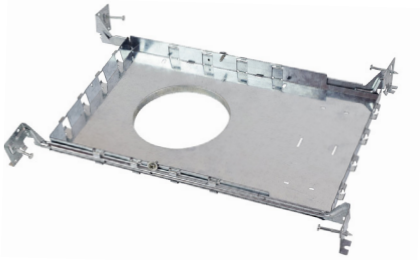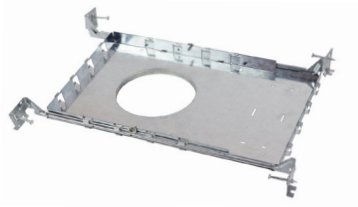

Notes

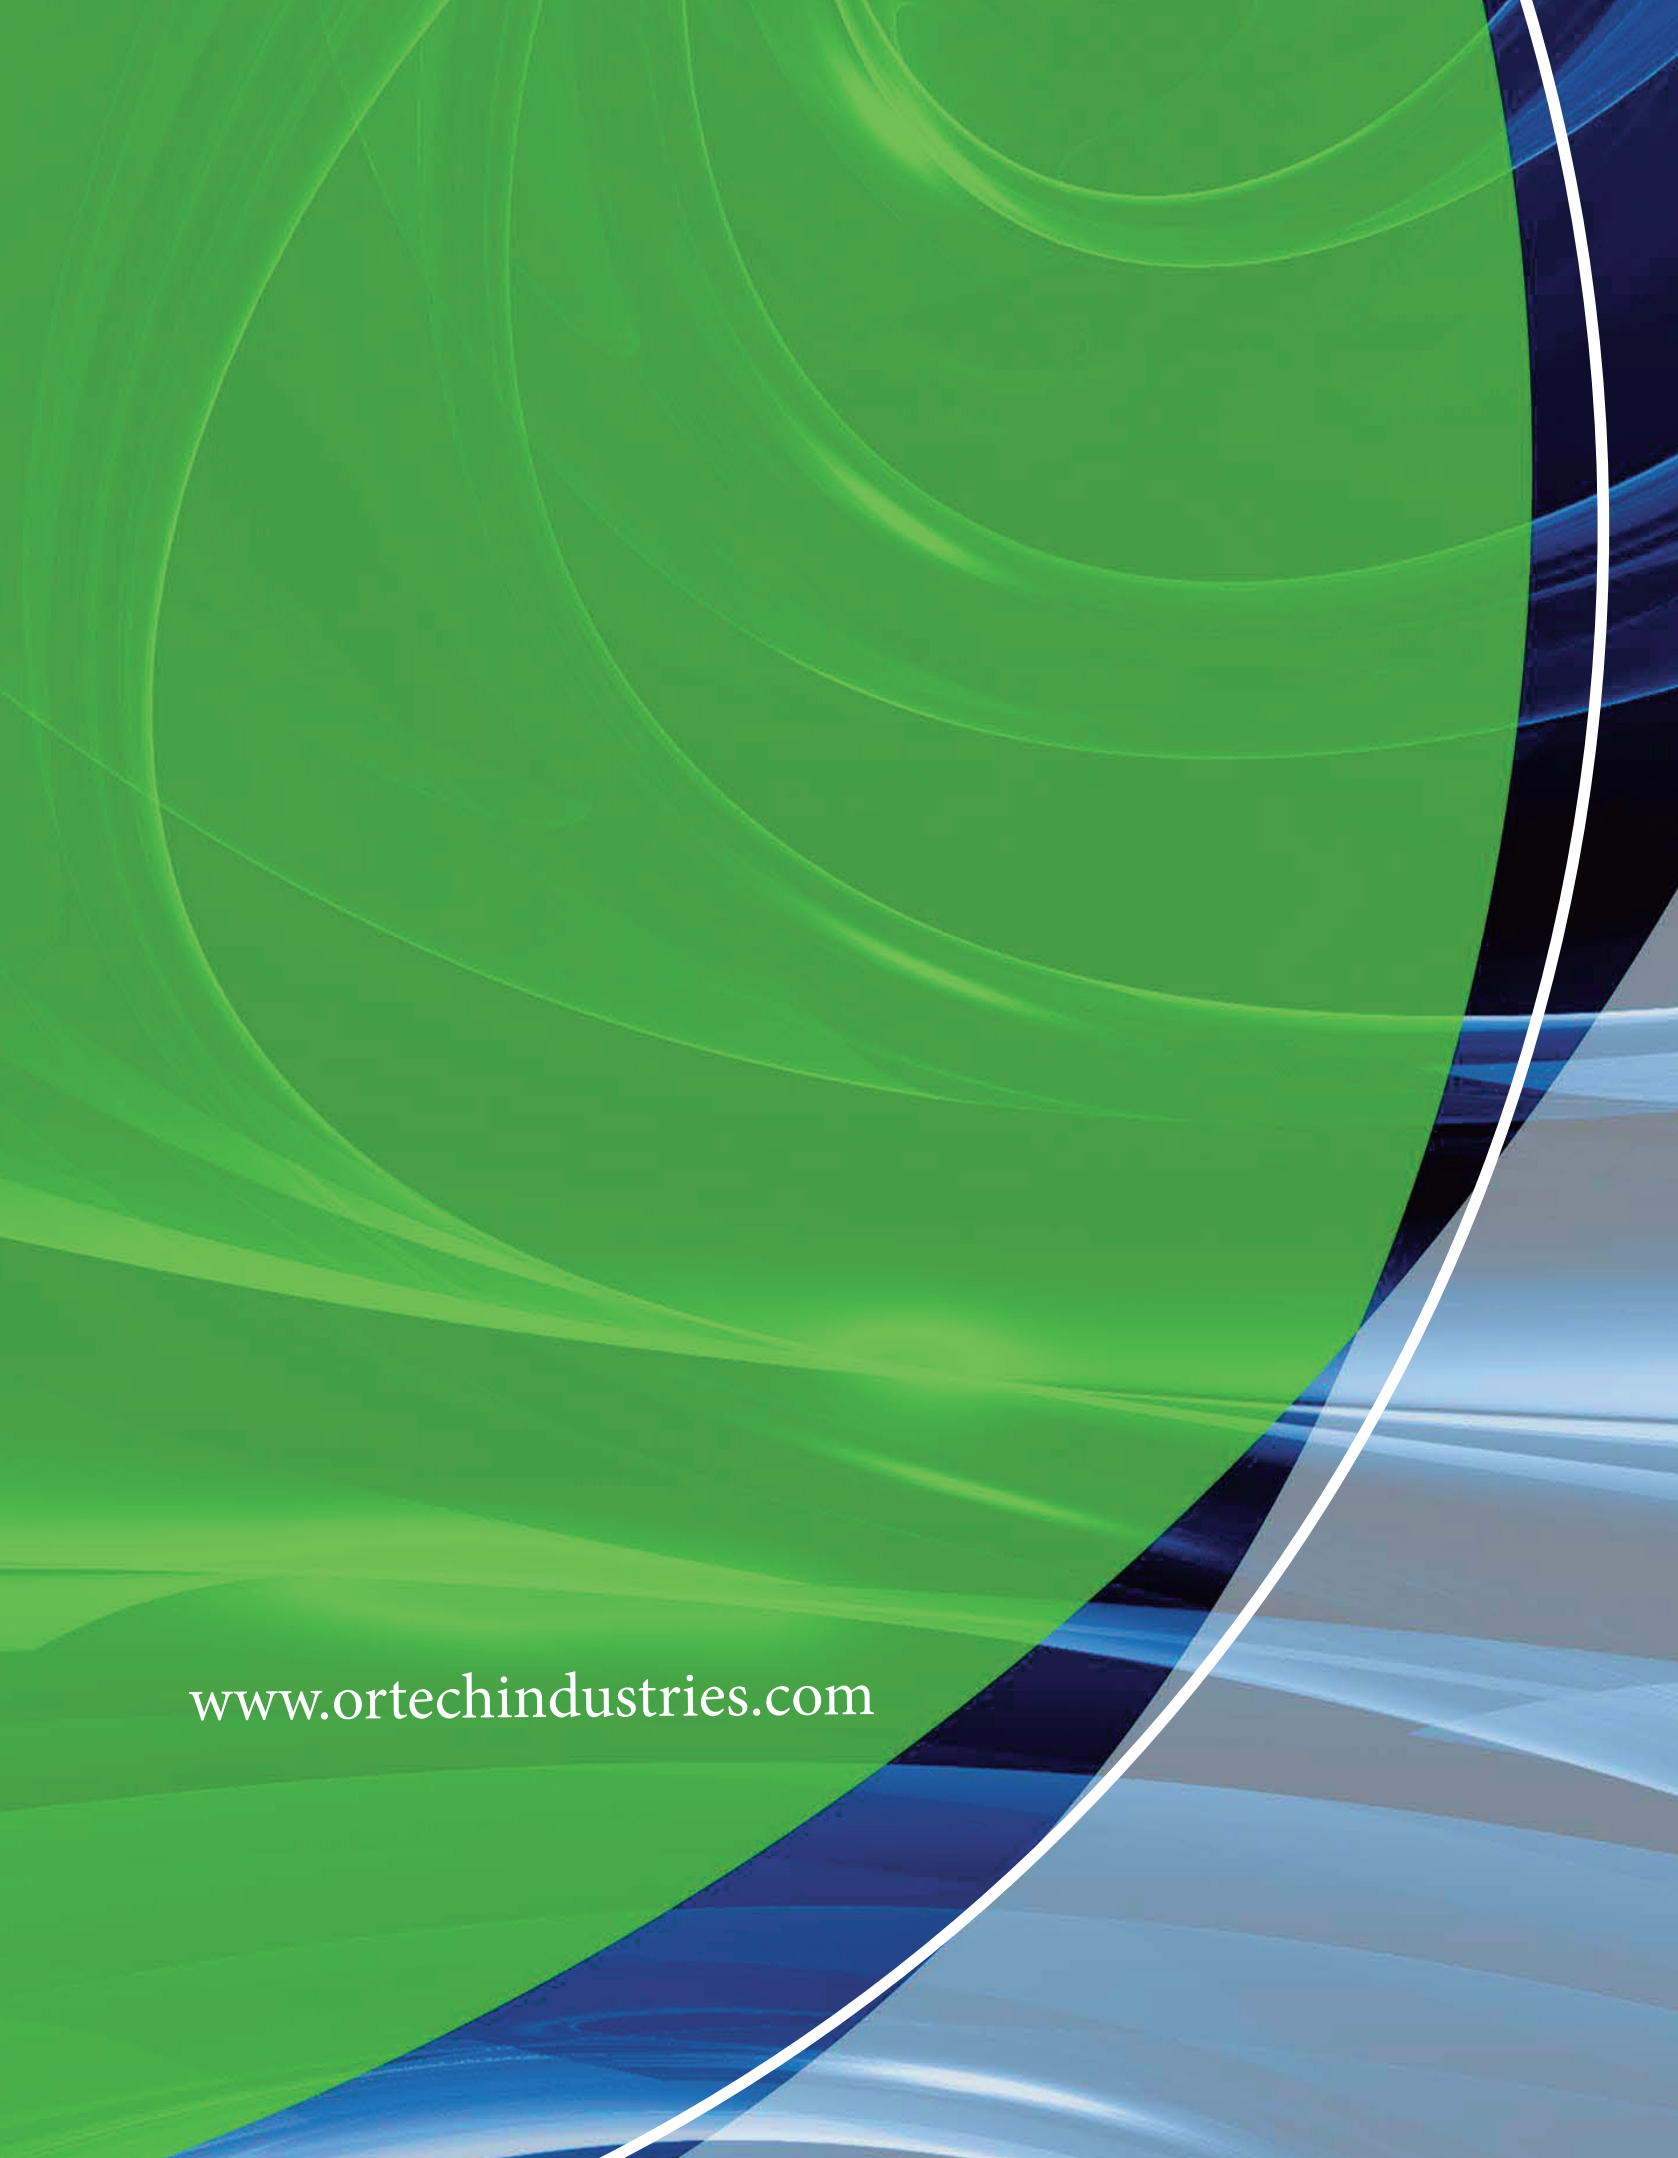

www.ortechindustries.com