



HIGHLIGHTS


- Round LED Slim light with driver in connection box
- Rated for damp locations where not directly exposed to rain or snow
- IC rated for direct contact with insulation
- Class 2 transformer in junction box is included

SPECIFICATIONS


Model	Wattage	Voltage	Lumens	Beam Angle	Lifetime	Cutout	Dimmable	Colour Temp.
DISC4	9W	120V	550 lmn	120°	50000 hours	108 mm	Yes	3K (Warm White) 4K (Natural White) 5K (Cool White)
DISC6	12W		700 lmn			159 mm		

- **Dimensions:** 121 mm x 121 mm x 24 mm (DISC4)
175 mm x 175 mm x 24 mm (DISC6)

DISC4

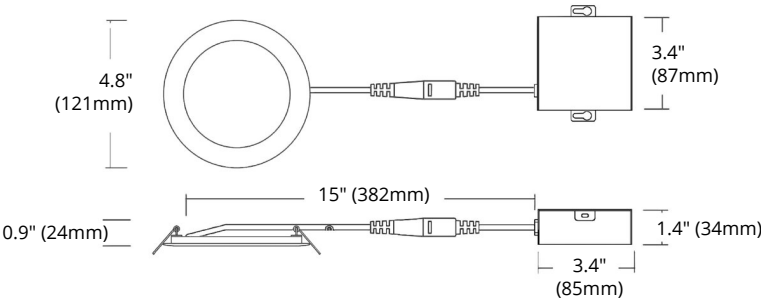

DISC6

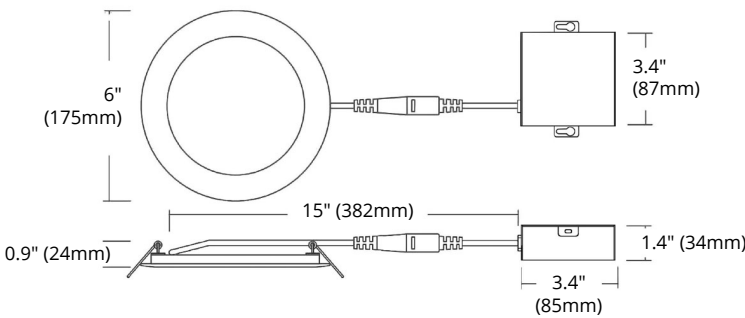

Rings
(sold separately)



SLIM4-RING BR
SLIM6-RING BR
Bronze Ring



SLIM4-RING CH
SLIM6-RING CH
Chrome Ring



SLIM4-RING CP
SLIM6-RING CP
Copper Ring



SLIM4-RING BK
SLIM6-RING BK
Black Ring



SLIM4-RING SN
SLIM6-RING SN
Satin Nickel Ring

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: