

MODEL DISC3 | DISC4 | DISC6



HIGHLIGHTS

- Round 3", 4", 6" LED Slim lights with driver in connection box
- Rated for damp locations where not directly exposed to water
- Easy and Fast installation — saves on labour
- IC rated for direct contact with insulation, no housing required
- Class 2 transformer in junction box is included
- Depth is 1/2", and for the best possible Layout Depth Flexibility, it should be installed right under joists

MOUNTING

- Cut hole in ceiling and snap fixture in Opening with attached spring clips
- Ceiling clearance required: 1/2"




SPECIFICATIONS

Model	DISC3	DISC4	DISC6
Wattage	8W	9W	12W
Voltage	120V		
Lumens	500 lmn	550 lmn	700 lmn
Beam Angle	120°		
Lifetime	50000 hours		
Cutout	ø 3-1/8" (78 mm)	ø 4-1/4" (108 mm)	ø 6-1/4" (159 mm)
CRI	80		
Dimmable	Yes		
Rating	IC Rated, Indoor use, for Damp location		
Grade of Protection	IP 54		
Air Tight	Yes		
Applications	Recessed ceiling / Balcony / Overhanging eaves, etc.		
Colour Temp.	3000K (Warm White) / *4000K (Natural White) / 5000K (Cool White)		
Operating Temp.	-20°C ~ +40°C		

* 4000K (Natural White) is available in DISC4 and DISC6 only

MODEL DISC3 | DISC4 | DISC6

DIMENSIONS

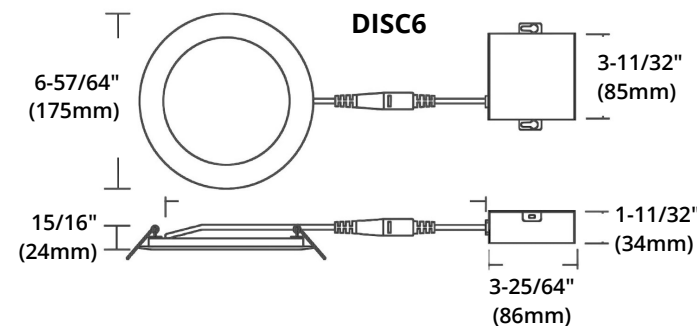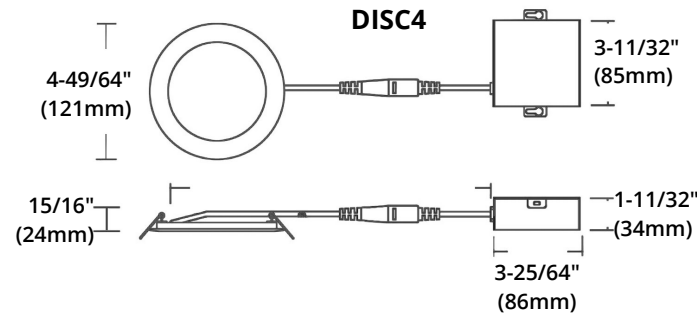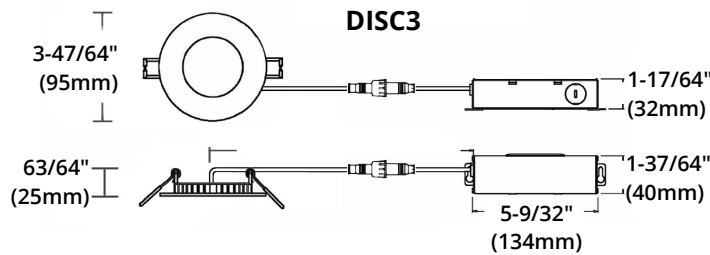


3" & 6" Trims
(sold separately)



4" Trims
(sold separately)



Accessories
(sold separately)

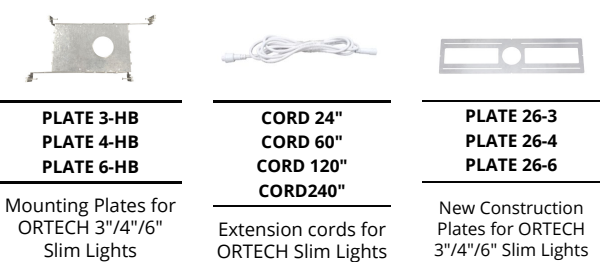

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: