


F-029-3FTC Finish(C) ☐

F-029-3FTS Finish(S) ☐

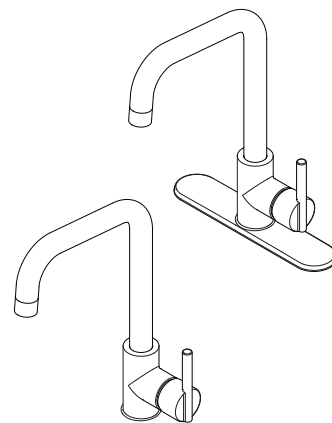

Specifications

Features

- 2.2 GPM Flow Rate
- All Metal Construction
- 360° Rotating Spout
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- Nylon Flex-Line Supply Lines
- TiteSeal™ Deckplate
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

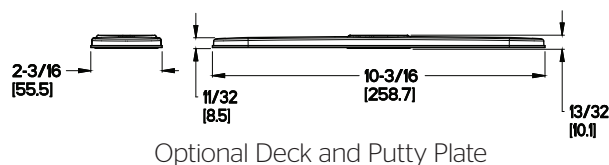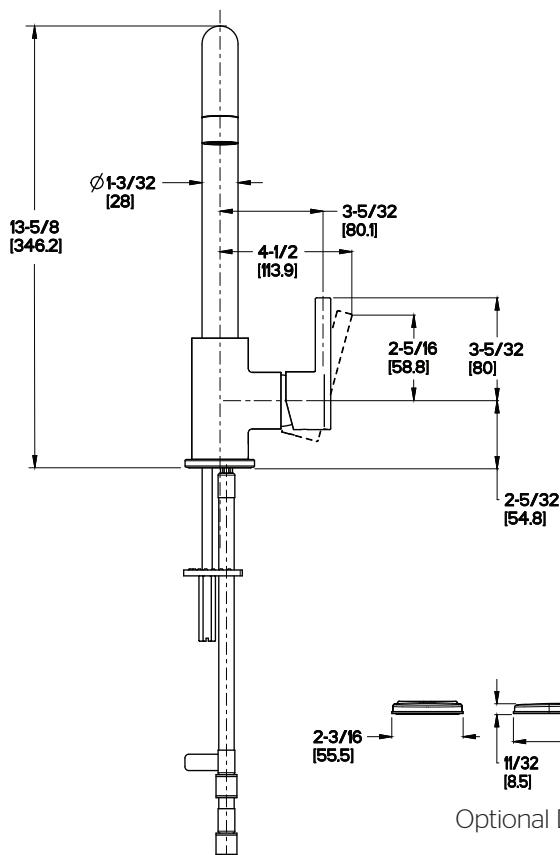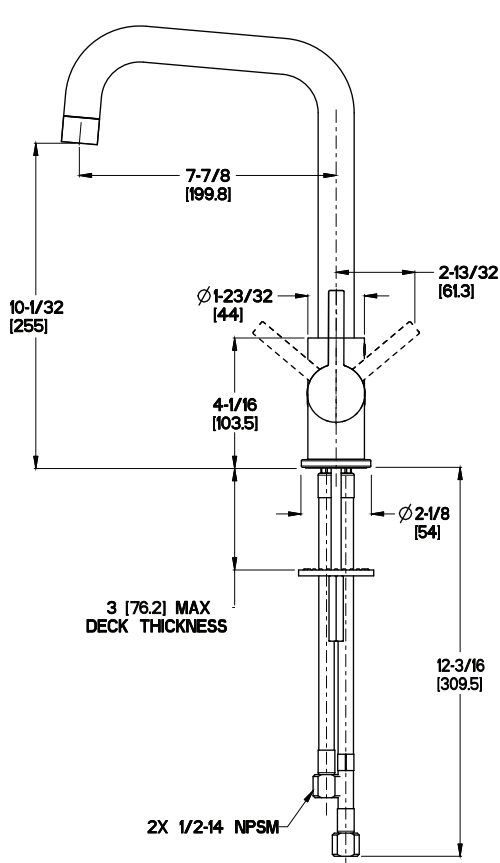

Optional Deck and Putty Plate

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings