


F-036-3GFS Finish(SS)\*

F-036-4GFS Finish(SS)

F-036-4GFY Finish(Y)

\*International Only

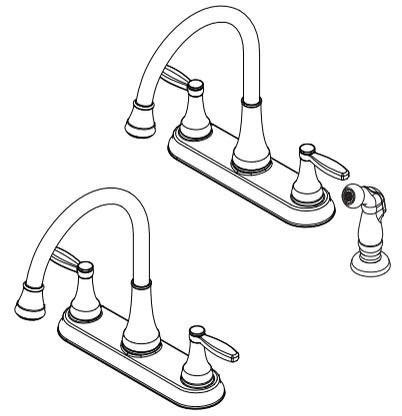

## Specifications

- 3 or 4-Hole Installation
- Pforever Seal
- Tri-Flow™

### Features

- .09 GPM Eco Rinse 1.8 MAX GPM
- 3 or 4-Hole Installation
- High Arc Spout
- Installs With or Without Side Spray
- 360° Swivel Spout
- TiteSeal™ Deck Plate
- Tri-Flow™ with Eco Option (Stream, Spray, EcoRinse™)
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention) (4GF Only)



## Dimensions

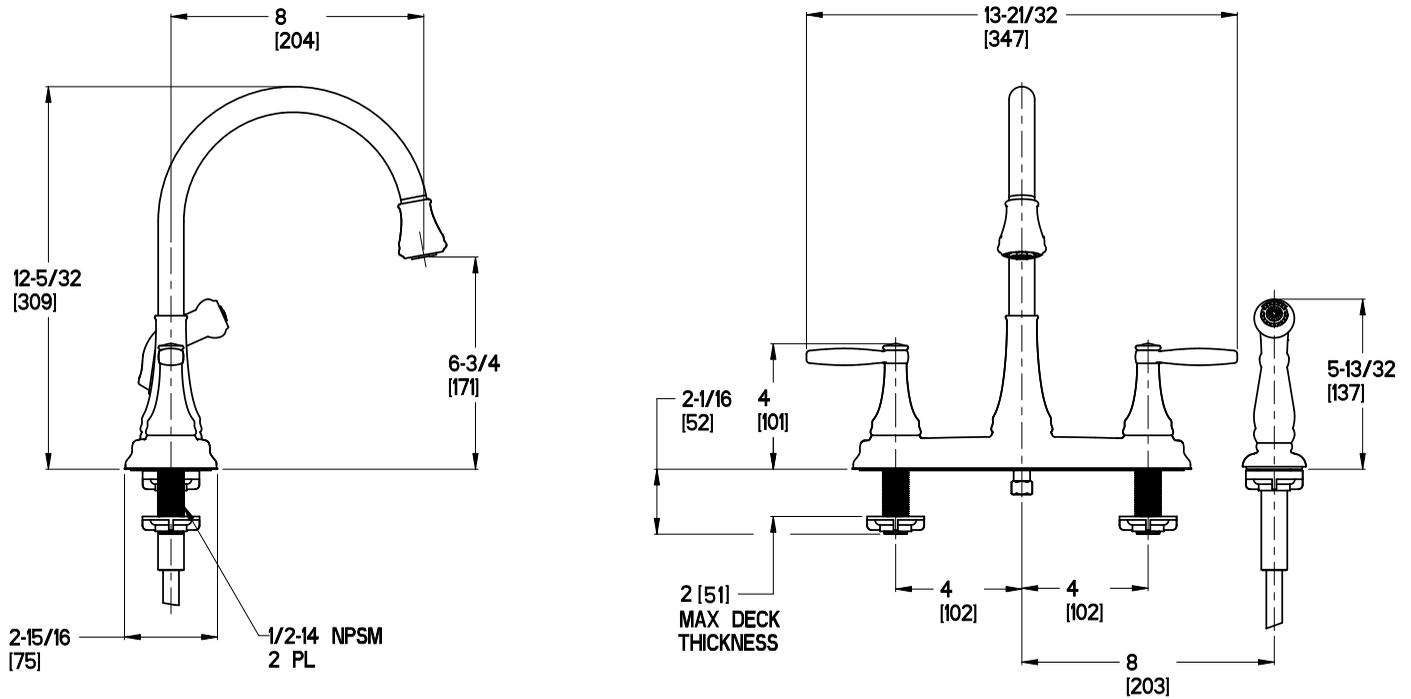

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings