


F-042-MDOC Finish(C) ☐

F-042-MDOK Finish(K) ☐

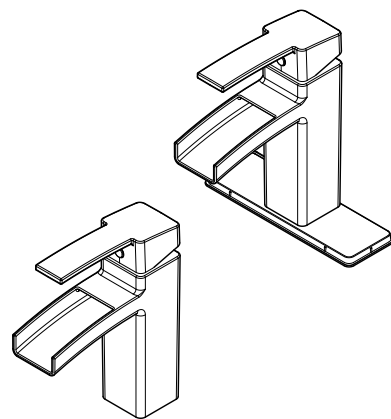

- All Metal Construction
- Pforever Seal
- Push & Seal™ Pop-Up

Specifications

Features

- 1.5 GPM Flow Rate
- All Metal Construction
- Mounting Hardware Included
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- Push & Seal™ Pop-Up
- Waterfall Trough Spout
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- EPA WaterSense Certification 1.5 gpm, 5.7 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

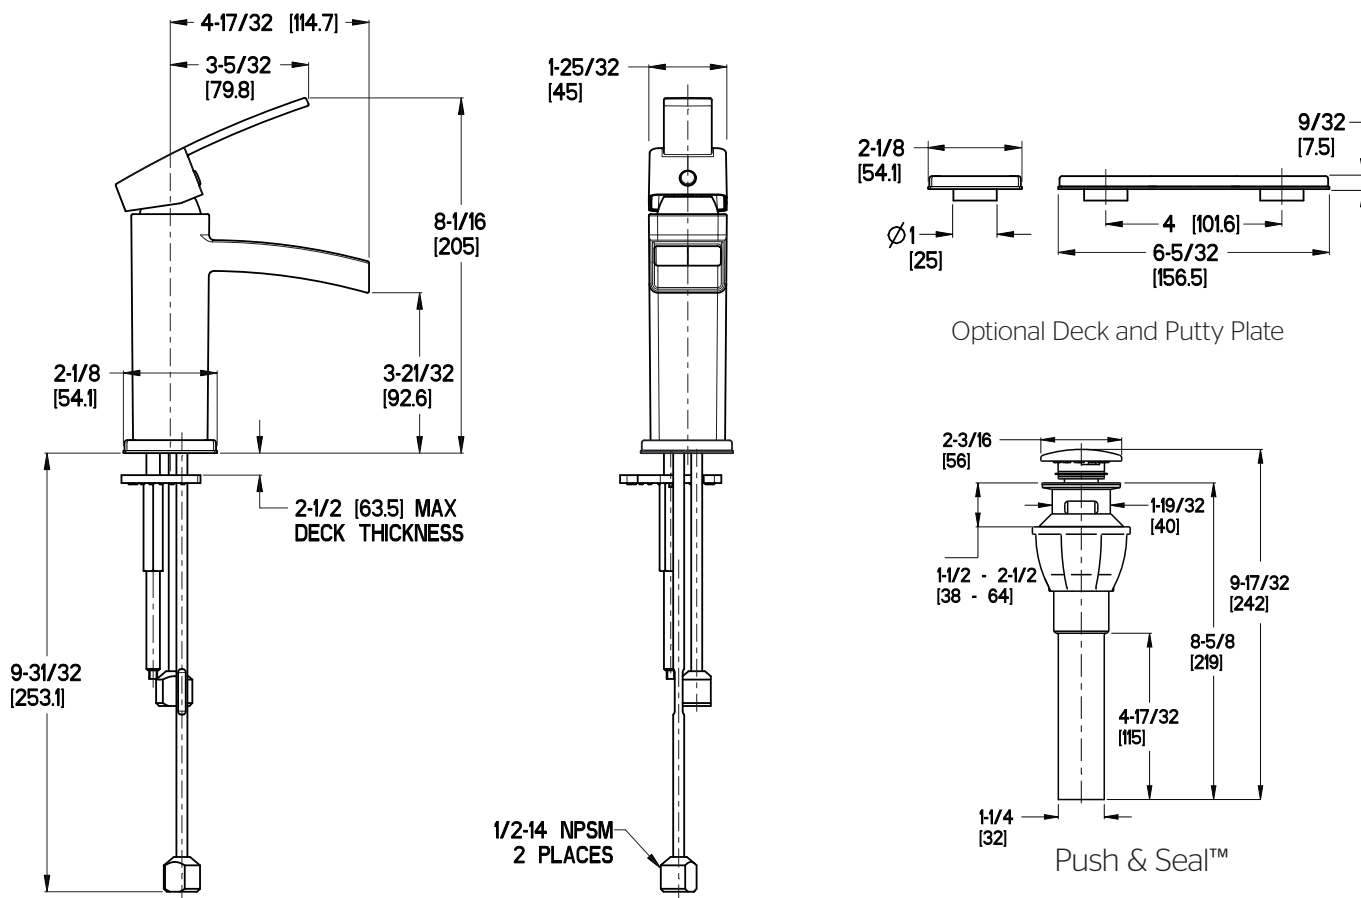

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings