


\*F529-6LMC Finish(C) ☐

F529-6LMS Finish(S) ☐

\*International Only

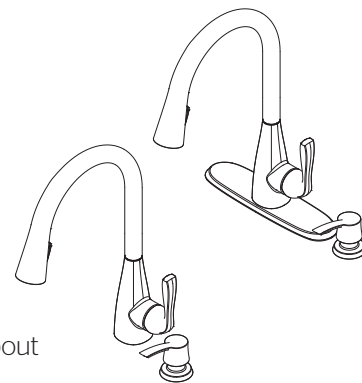

- 1, 2, 3 or 4-Hole Installation Spout
- 2 Function Spray Head
- Concealed Sprayhead

## Specifications

### Features

- 1.8 GPM Flow Rate
- 1, 2, 3 or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 2 Function Pull-Down Sprayer
- AutoDock™ Sprayhead Docking
- Concealed Sprayhead
- 360° Rotating Swivel Spout
- High Arc Spout
- Mounting Hardware Included
- Quick Install Tool
- Pfaster Connect
- PVD Finish
- Soap Dispenser Included
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®



### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:


- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- CEC Compliant
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



## Dimensions

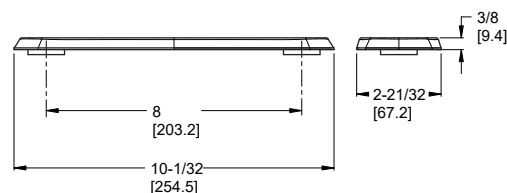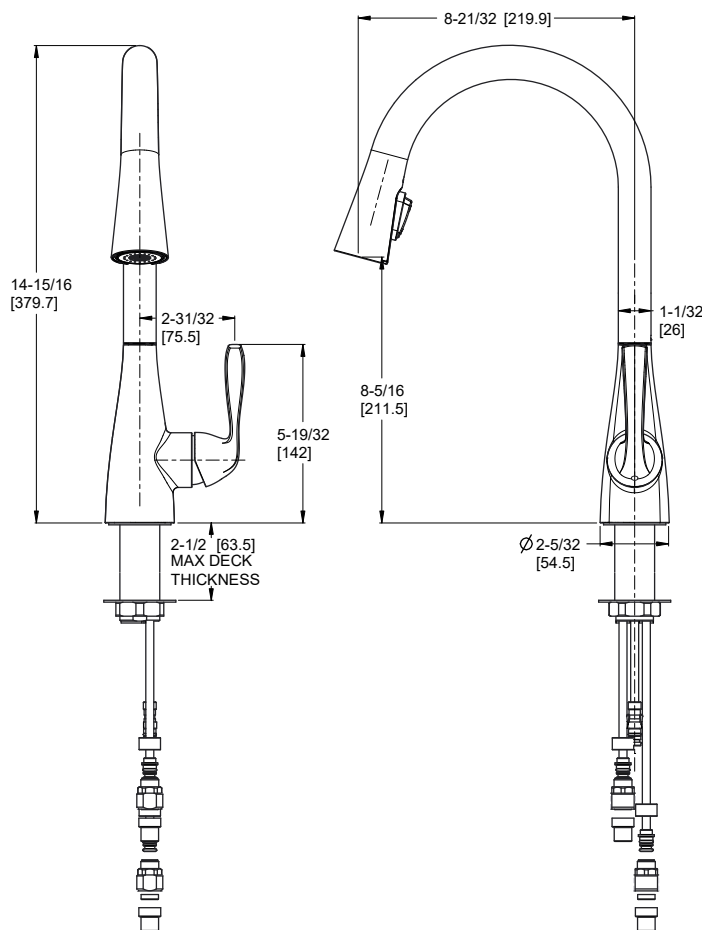

Optional Deckplate

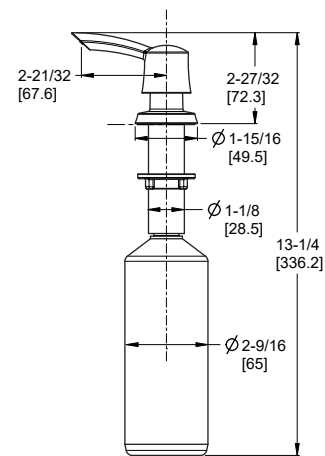

Top Filling Soap Dispenser

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings