


F529-7FTB Finish(B)   
 F529-7FTBG Finish(BG)   
 F529-7FTC Finish(C)   
 F529-7FTS Finish(S)

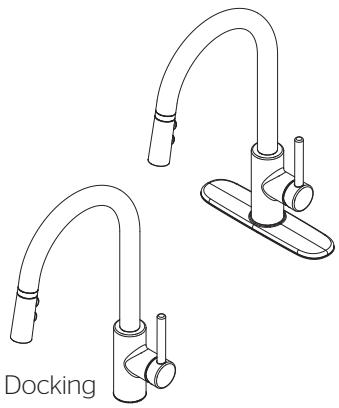

### Specifications

#### Features

- 1.8 GPM Flow Rate
- 3 Function Pull-Down Sprayer
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- AccuDock™ Sprayhead Docking
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®




#### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF 61/9 AnnexG Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



### Dimensions

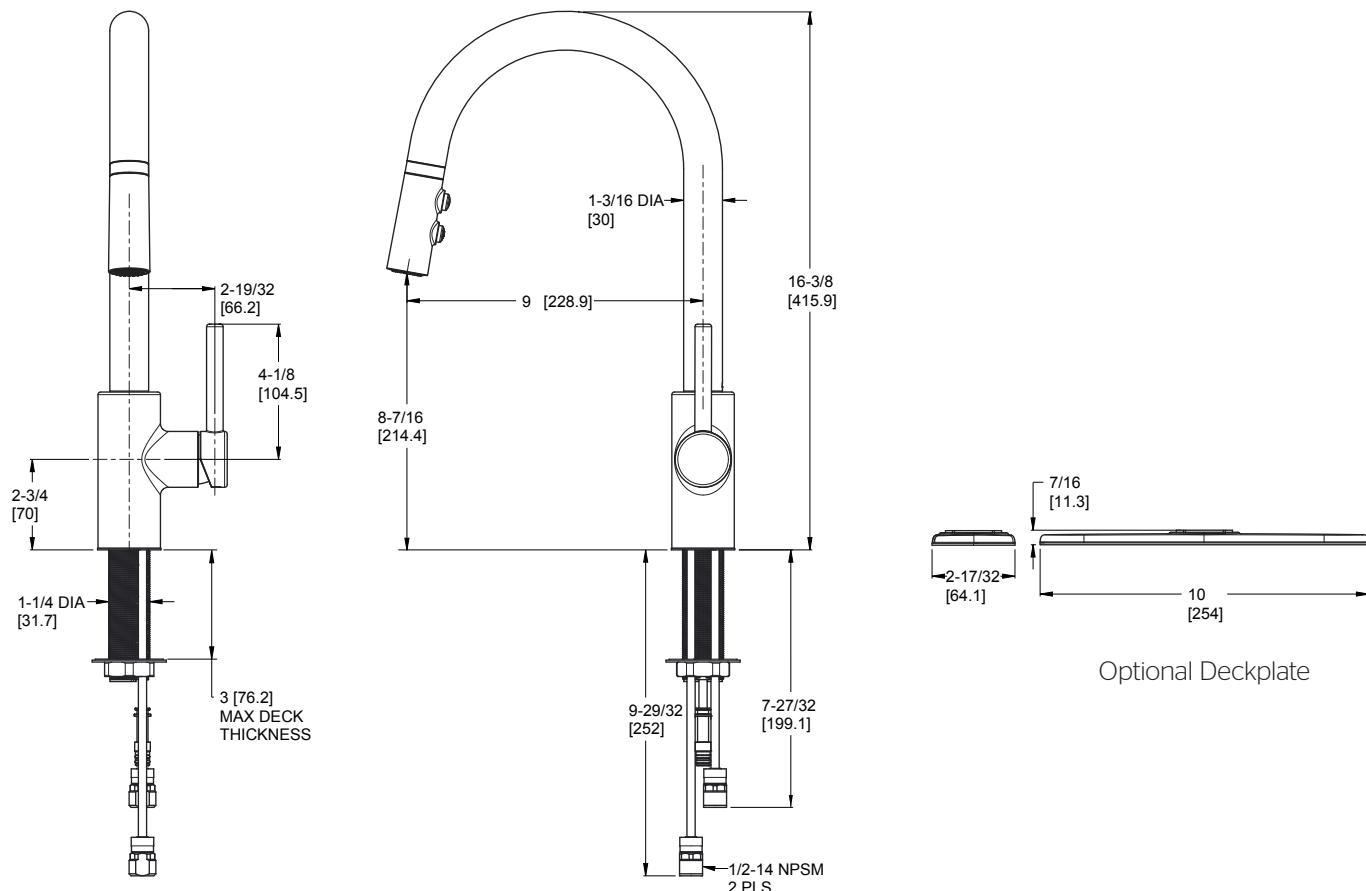

Ø13/8 Min to Ø1-1/2 Max. Deck Hole Openings