


FWKP-400B Finish(MB)

F529-7CGS Finish(S)

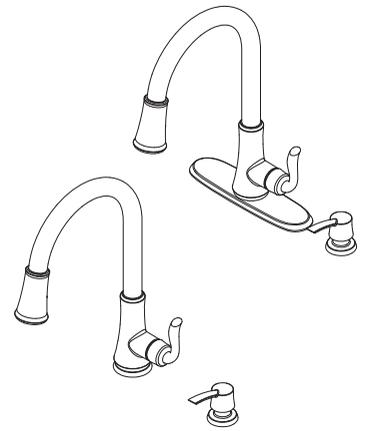

Specifications

- 1, 2, 3, or 4-Hole Installation
- Single Control
- Pforever Seal

Features

- 1.8 GPM Flow Rate
- 1, 2, 3, or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 3 Function Pull-Down Sprayer
- Mounting Hardware Included
- Mounting Posts
- High Arc Spout
- 360° Rotating Spout
- Swivel Spout
- Soap Dispenser Included
- Pfast Connect™
- PVD Finish (SS Only)
- Quick Install Tool
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- CEC Compliant
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



Dimensions

