


LF-042-FERB Finish(B)

LF-042-FERC Finish(C)

LF-042-FERGS Finish(GS)

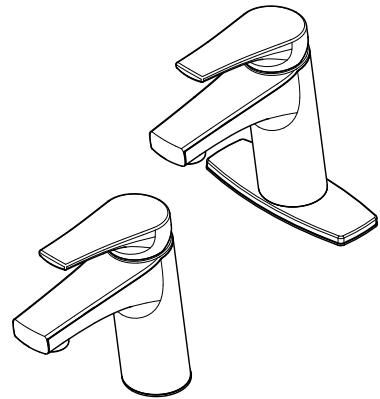

## Specifications

### Features

- 1.2 GPM Flow Rate
- 1 or 3-Hole Installation
- Optional Deckplate Included
- Push & Seal™ Drain Included
- Mounting Hardware Included
- Spot Defense™ Finish Resists Spots and Fingerprints

- TiteSeal™ Deckplate
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

- 1 or 3-Hole Installation
- Pforever Seal


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:


- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- ASME A112.18.3 (Back Flow Prevention)
- NSF 61/9 & 372 (Low Lead)
- CEC Compliant
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever Handles Only)
- EPA WaterSense Certification 1.2 gpm, 4.5 L/Min




## Dimensions

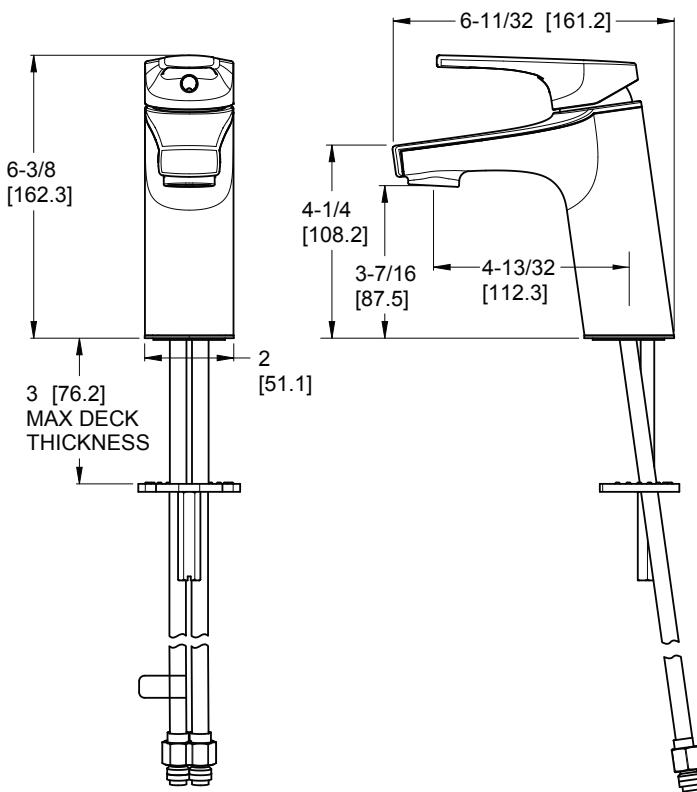

Ø1 Min to Ø1 1/2 Max. Deck Hole Openings

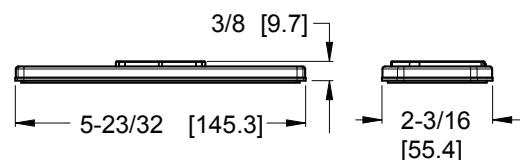

Optional Deckplate

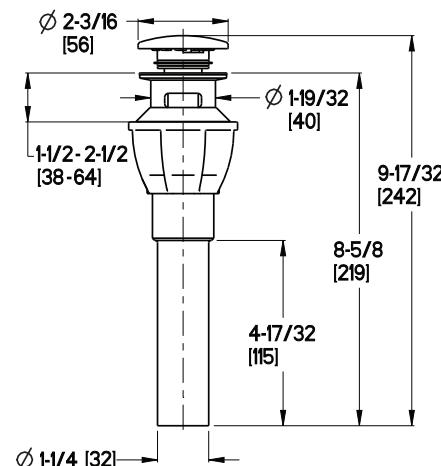

Push & Seal™ Drain