


- | | | | | | | | |
|---|---|---|---|---|---|---|---|
| LG6-1TBC Finish(C) ☐ | LG6-1TBD Finish(D) ☐ | LG6-1TBK Finish(K) ☐ | LG6-1TBY Finish(Y) ☐ | LG6-2TBC Finish(C) ☐ | LG6-2TBD Finish(D) ☐ | LG6-2TBK Finish(K) ☐ | LG6-2TBY Finish(Y) ☐ |
| LG6-1TBD Finish(D) ☐ | LG6-1TBBG Finish(BG) ☐ | LG6-2TBC Finish(C) ☐ | LG6-2TBD Finish(D) ☐ | LG6-2TBK Finish(K) ☐ | LG6-2TBY Finish(Y) ☐ | LG6-3TBC Finish(C) ☐ | LG6-3TBD Finish(D) ☐ |
| LG6-3TBK Finish(K) ☐ | LG6-3TBY Finish(Y) ☐ | LG6-3TBC Finish(C) ☐ | LG6-3TBD Finish(D) ☐ | LG6-3TBK Finish(K) ☐ | LG6-3TBY Finish(Y) ☐ | LG6-3TBC Finish(C) ☐ | LG6-3TBD Finish(D) ☐ |

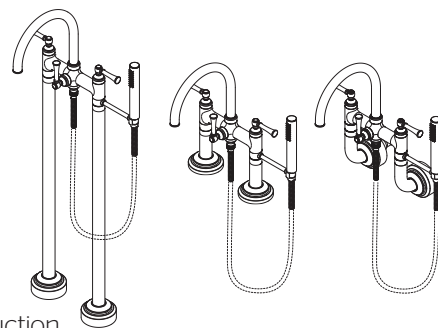

- All Metal Construction
- High Arc Spout
- Laminar Water Flow

Specifications

Features

- 1.8 GPM Flow Rate (Handheld Shower)
- 60" Metal Hose
- All Metal Construction
- High Arc Spout
- Laminar Water Flow
- Cross Handles Available, HHL-LG6-TB*, Order Separately
- Requires OX6-34OR Valve, Sold Separately (LG6-1TB Only)
- Easy To Clean Nozzles
- Pforever Seal Ceramic Disc Cartridges
- Optional Concrete Mounting Bracket 931-132 Available, Sold Separately (LG6-1TB Only)
- Optional Wall Support 931-133* Available, Order Separately (LG6-1TB Only)
- Pforever Warranty®



Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

