

- LG6-1TNTC Finish(C) ☐
- LG6-1TNTD Finish(D) ☐
- LG6-1TNTK Finish(K) ☐
- LG6-1TNTB Finish(B) ☐
- LG6-1TNTBG Finish(BG) ☐

## Specifications

### Features

- 6 GPM @ 60 PSI Flow Rate
- 1.8 GPM Flow Rate (Handheld)
- 60" Metal Hose
- All Metal Construction
- Ceramic Disc Valve
- Easy to Clean Nozzles
- Laminar Water Flow
- Temperature Control Only
- Integrated Hand Shower Diverter Handle
- High Arc Spout
- Requires OX6-270R Valve (Sold Separately)
- Optional Concrete Mounting Bracket 931-145 Available (Sold Separately)
- Limited Lifetime Warranty

- All Metal Construction
- Trim Only, Valve Not Included


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



## Dimensions

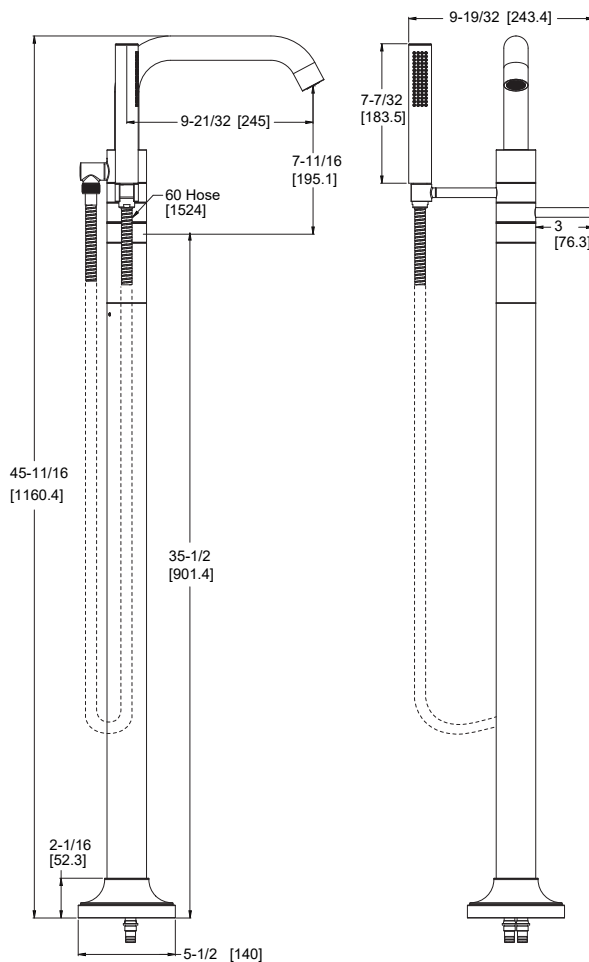

Ø3-3/8Max. Deck Hole Openings