




OUTDOOR, HAZARDOUS & TEMPORARY WORK LIGHT LUMINAIRES

QUICK SHIP

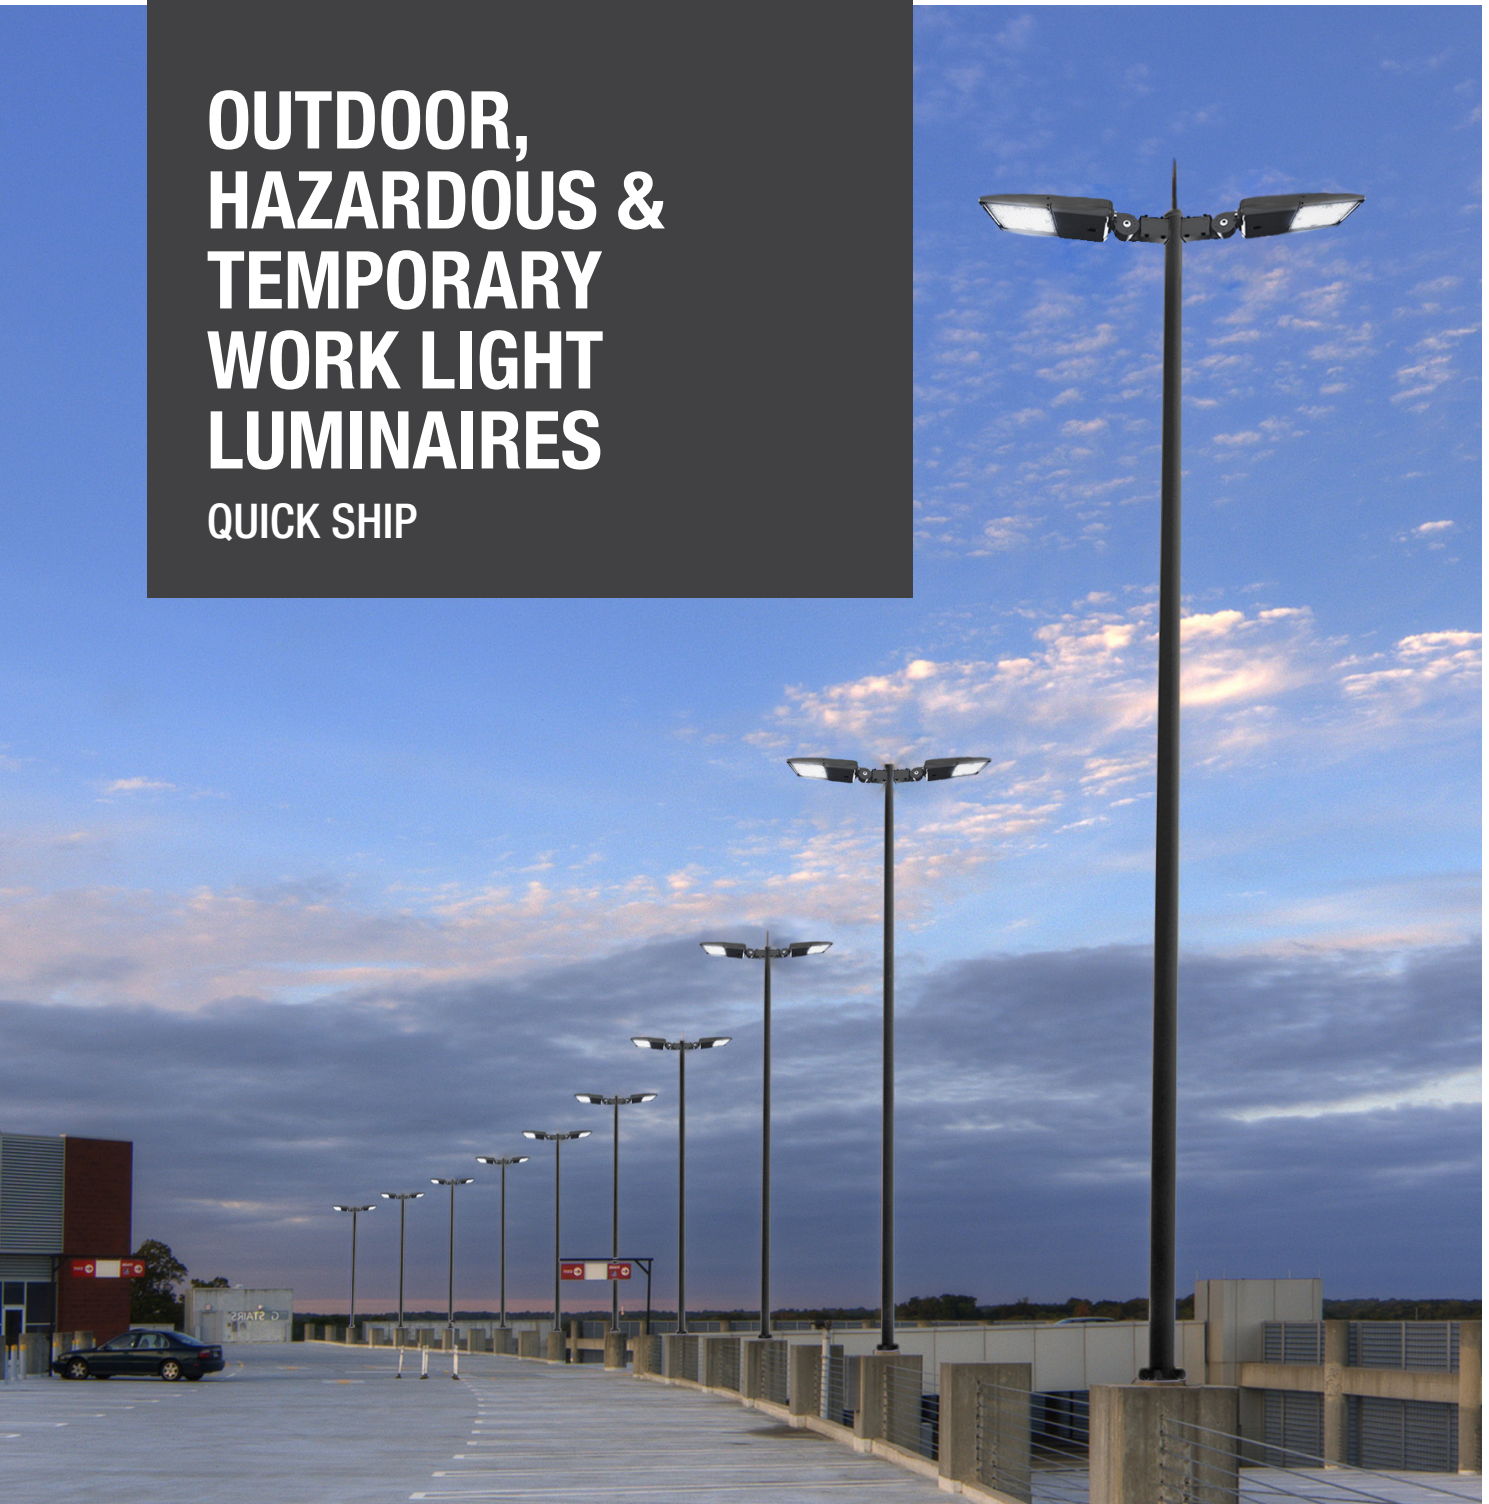

STANPRO

4 OUTDOOR LIGHTING

Wall Pack, Flood Luminaire, Flood and Area Light, Yard Light, Lamp post, Bollard, Under canopy and garage, Security Light

18 HAZARDOUS LOCATION LIGHTING

Flood Luminaire, High Bay, Linear Luminaire

23 TEMPORARY WORK LIGHT

String Light, Temporary High Bay, Portable Flood Light, AC Flood Light, Accessories



Outdoor Lighting

Stanpro offers a wide range of LED outdoor luminaires that are perfect for a large variety of applications which create a visual impact for your building. Whether you need to light up a pathway, entryway, parking area or enhance architectural features, you are sure to find the perfect lighting solution for your needs!

Wall Pack

Stanpro's wide variety of Wall Pack luminaires is perfect for many applications such as offices buildings, entryways, schools or parking areas. They are offered in different housing colors and wattages to create a seamless look with your environment. Certain Wall Packs come with integrated photocell, selectable power and/or selectable color temperature.



WPS GEN 4



WPS-L GEN 3

Order code	Model number	DLC unique ID	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	Photo-cell ¹	CRI	Life L70 (hrs)	Tested hours LM-80 (hrs)	Calculated TM21 (hrs)	Finish	Dimming	B.U.G.	LED current factor (mA)	Power (%)	THD (%)	Case qty (master)
------------	--------------	---------------	-----------	-----------	-----------------	-------------------	-------------------	-------------------------	-----	----------------	--------------------------	-----------------------	--------	---------	--------	-------------------------	-----------	---------	-------------------

WPS GEN 4

Power Select, CCT Select and Integrated Photocell¹

68314	WPS-PS40-Q-3C	PLW61NEJG50K	25/30/40	120-347	3 000/4 000/5 000	3 875/4 500/5 800 ²	141	Yes	>80	54 000	9 000	173 600	Bronze	Yes	B1U3G4	850	≥0.9	≤20	1
68315	WPS-PS100-Q-3C	PLE7PYF9LCSH	60/80/100	120-347	3 000/4 000/5 000	9 300/12 000/14 500 ²	137	Yes	>80	54 000	9 000	173 600	Bronze	Yes	B1U3G4	2 100	≥0.9	≤20	1

Single Power, Single CCT and Integrated Photocell¹

68524	WPS-NS30-W-40K/P127		29	120-277	4 000	4 200	150	Yes	>80	54 000	9 000	173 600	Bronze	Yes	B1U3G5	230	≥0.9	≤20	1
68525	WPS-NS30-W-50K/P127		29	120-277	5 000	4 300	148	Yes	>80	54 000	9 000	173 600	Bronze	Yes	B1U3G5	230	≥0.9	≤20	1

Single Power and Single CCT

68490	WPS-NS40-W-40K	PLVM09BUX07G	40	120-277	4 000	6 004	142	No	>80	54 000	9 000	173 600	Bronze	Yes	B1U3G4	354	≥0.9	≤20	1
68491	WPS-NS40-W-50K	PL3ULW7TEV5H	40	120-277	5 000	6 034	144	No	>80	54 000	9 000	173 600	Bronze	Yes	B1U3G4	354	≥0.9	≤20	1
68492	WPS-NS60-W-40K	PL6EFOUTBPWB	60	120-277	4 000	8 458	146	No	>80	54 000	9 000	173 600	Bronze	Yes	B1U3G5	486	≥0.9	≤20	1
68493	WPS-NS60-W-50K	PL01JETYSQ80	60	120-277	5 000	8 611	147	No	>80	54 000	9 000	173 600	Bronze	Yes	B1U3G5	486	≥0.9	≤20	1
68497	WPS-NS80-W-40K	PLVXL8TOP2UF	80	120-277	4 000	11 242	146	No	>80	54 000	9 000	173 600	Bronze	Yes	B1U4G5	645	≥0.9	≤20	1
68498	WPS-NS80-W-50K	PL2AZJG3LORQ	80	120-277	5 000	11 446	148	No	>80	54 000	9 000	173 600	Bronze	Yes	B1U4G5	645	≥0.9	≤20	1

Single Power, CCT Select and Integrated Photocell¹

68316	WPS-NS120-Q-3C	PLYRMZYS3AY3	120	120-347	3 000/4 000/5 000	16 943	137	Yes	>80	54 000	9 000	173 600	Bronze	Yes	B2U4G5	2 600	≥0.9	≤20	1
-------	----------------	--------------	-----	---------	-------------------	--------	-----	-----	-----	--------	-------	---------	--------	-----	--------	-------	------	-----	---


¹ Integrated ON/OFF photocell that can be easily disabled.

² Lumen values are based on 4 000 K default settings. Please refer to spec sheet for more details on other color temperatures.

Part number	DLC unique ID	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Tested hours LM-80 (hrs)	LED current (mA)	Power factor	THD (%)	Traditionnal equivalent (W)	Case qty (master)
-------------	---------------	-----------	-----------	-----------------	-------------------	-------------------	-----	----------------	--------------------------	------------------	--------------	---------	-----------------------------	-------------------

WPS-L GEN 3

WPS-LC21	PL7MP95NK42E	40	120-277	4 000	4 100	103	80	>54 000	9 000	79	0.96	9	150	150	1
WPS-LC31	PLHB5AXFG78F	60	120-277	4 000	6 000	100	80	>54 000	9 000	78	0.90	18	200	160	1
WPS-LC41	PLNKNV1YJBE	80	120-277	4 000	8 000	100	80	>54 000	9 000	72	0.96	8	250	175	1
WPS-LC21-50K	PLYRWBH6FI47	40	120-277	5 000	4 150	104	80	>54 000	9 000	79	0.96	9	150	150	1
WPS-LC31-50K	PLMRNA1040BD	60	120-277	5 000	6 120	102	80	>54 000	9 000	78	0.90	18	200	160	1
WPS-LC41-50K	PLR98PDMHIAF	80	120-277	5 000	8 160	102	80	>54 000	9 000	72	0.96	8	250	175	1
WPS-LC22	PLMFVOXEUM2I	40	347-480	4 000	4 400	110	70	>54 000	9 000	77	0.87	17	150	150	1
WPS-LC32	PLUU4GMTV18M	60	347-480	4 000	6 800	113	70	>54 000	9 000	85	0.88	18	220	229	1
WPS-LC42	PLJ7U0CVWDP	80	347-480	4 000	8 500	106	70	>54 000	9 000	86	0.90	10	280	193	1
WPS-LC22-50K	PLLG9P9IQE1RS	40	347-480	5 000	4 480	112	70	>54 000	9 000	77	0.87	17	150	150	1
WPS-LC32-50K	PLT11RPACC8V	60	347-480	5 000	6 900	115	70	>54 000	9 000	85	0.88	18	220	229	1
WPS-LC42-50K	PLQX5RZHWIA	80	347-480	5 000	8 600	108	70	>54 000	9 000	86	0.90	10	280	193	1

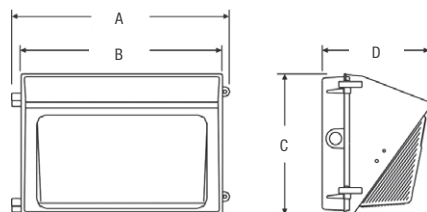

Dimensions	WPS GEN 4	WPS-L GEN 3
A	14.37" (365 mm)	14.25" (367 mm)
B	13.1" (333 mm)	13.4" (340 mm)
C	9.33" (237 mm)	9" (236 mm)
D	7.36" (187 mm)	7.25" (181 mm)



Lumen values are derived from photometric testing.
¹ Only some configurations of WPS GEN 4.



WFC



WPR-L



WPA-L



WCI-L

Order code	Model number	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Distrib. type	Finish	Dimming	Power factor	THD (%)	Traditional equivalent (W)		Case qty (master)
WFC																
68607	WFC-PS60A3-Q-3C-BR-P	25/40/60	120-347	3 000/4 000/5 000	3 625/5 640/8 220 ¹	122-137	80	50 000	III	Bronze	Yes	≥0.9	≤20	175-400	175-250	1
68608	WFC-PS100A3-Q-3C-BR-P	80/100	120-347	3 000/4 000/5 000	11 520/14 000 ¹	123-140	80	50 000	III	Bronze	Yes	≥0.9	≤20	400-1 000	250-400	1

Order code	Model number	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	LED current (mA)	Finish	Dimming (Yes/No)	Power factor	THD (%)	Traditional equivalent (W) HM SHP		Case qty (master)
WPR-L															
65565	LWP/FC0/50W/30K/120-277/BRZ/STD	48	120-277	3 000	5 656	119	80+	520	Bronze	No	0.99	< 14	175	150	1
65567	LWP/FC0/80W/30K/120-277/BRZ/STD	78	120-277	3 000	8 789	113	80+	1 500	Bronze	Yes	0.99	< 11	250	200	1
WPA-L															
65570	WPA-LS1-W/40K-BR	20	120-277	4 000	2 118	105	80+	300	Bronze	No	0.98	< 14	70	70	6

Order code	Model number	DLC unique ID	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	Life L70 (hrs)	Tested hours LM-80 (hrs)	Calculated TM21 (hrs)	CRI	Finish	Dimming (Yes/No)	B.U.G.	LED current (mA)	Power factor	THD (%)	Case qty (master)
WCI-L																		
68311	WCI-LS1-W/30K-BR	N/A	15	120-277	3 000	1 725	118	>54 000	9 000	140 000	80	Bronze	No	B1U3G2	310	> 0.94	13	10
68312	WCI-LS2-W/3C-BR	PLC5JFODTZA0	20	120-277	4 000/4 500/5 000	2 522/2 926/2 637	127	>54 000	9 000	140 000	80	Bronze	No	B1U3G2	310	> 0.94	13	10
68313	WCI-LS2-W/3C-WH	PLC5JFODTZA0	20	120-277	4 000/4 500/5 000	2 522/2 926/2 637	127	>54 000	9 000	140 000	80	White	No	B1U3G2	310	> 0.94	13	10

Dimensions	WFC 25/40/60 W	WFC 80/100 W	WPR-L	WPA-L	WCI-L
Length	14 3/16" (360 mm)	14 3/16" (360 mm)	14 5/16" (364 mm)	6 7/8" (174.2 mm)	5 13/16" (147.64 mm)
Width	6 9/16" (166 mm)	9 5/8" (245 mm)	9 1/4" (235 mm)	10 15/16" (278.5 mm)	8 9/16" (217.93 mm)
Depth	9 5/16" (236 mm)	9 5/16" (236 mm)	8 1/16" (205 mm)	5 3/16" (132.1 mm)	3 1/16" (77.98 mm)

¹ Lumen values are based on 4 000 K default settings. Please refer to Spec Sheet for more details on other color temperatures.

² Only WFC.
Lumen values are derived from photometric testing. For a complete list of compatible dimmers and DLC qualified products, please visit www.standardpro.com.




Adjustable tilt up to 90°

Integrated level inside the housing to facilitate installation



WPV-L

Order code	Part number	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Finish	Dimming (Yes/No)	LED current (mA)	Power factor	THD (%)	Traditional equivalent (W)		Case qty (master)
													HM	SHP	
65571	LWP/SLM/S2/12W/40K/120-277/BRZ/STD	12	120-277	4 000	1 286	109	80+	Bronze	No	150	0.99	< 12	50	-	8
65572	LWP/SLM/S2/30W/40K/120-277/BRZ/STD	28	120-277	4 000	3 229	116	80+	Bronze	No	380	0.99	< 12	100	100	4
65573	LWP/SLM/S2/30W/40K/120-277/WH/STD	28	120-277	4 000	3 229	116	80+	White	No	380	0.99	< 12	100	100	4
65578	LWP/SLM/S2/40W/40K/347/BRZ/STD	36	347-480	4 000	4 081	113	80+	Bronze	Yes	170	0.98	> 5	150	100	4
65574	LWP/SLM/S2/50W/40K/120-277/BRZ/STD	50	120-277	4 000	5 193	105	80+	Bronze	No	520	0.99	< 14	175	150	4
65576	LWP/SLM/S2/80W/40K/120-277/BRZ/STD	81	120-277	4 000	9 056	112	80+	Bronze	Yes	1000	0.99	< 13	250	200	2

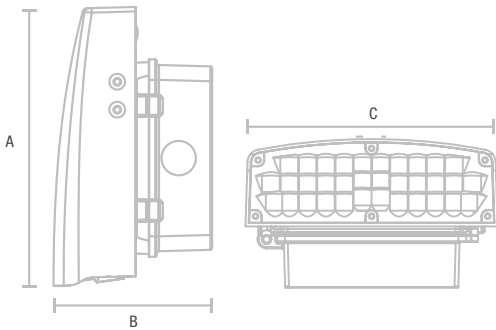

Dimensions	12 W	28, 36, 50 W	81 W
A	5 7/8" (149.8 mm)	8 3/4" (223 mm)	13 1/8" (334 mm)
B	3 3/8" (85.2 mm)	4 1/2" (114 mm)	5 7/16" (138 mm)
C	5" (127.7 mm)	7 5/8" (193 mm)	11 1/16" (281 mm)

Lumen values are derived from photometric testing.
For a complete list of compatible dimmers and DLC qualified products,
please visit www.standardpro.com.

5 yrs
warranty

LED
fixture

-40°C

6
wet
location

IP
65

cULus

DLC




Flood Luminaire

Flood luminaires are perfect for various applications such as wall washing, lighting pathways, landscape or signage lighting. They are offered in multiple wattages to fit both residential and commercial uses, and have a wide flood distribution for a large and uniform light pattern.



Yoke 30, 50 W

Order code	Description	Watts (W)	Volts (V)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Finish	NEMA type	Traditionnal equivalent (W)		Case qty (master)
										MH	HPS	
65591	LFL/S2/30W/40K/YK/120-277/BRZ/STD	30	120-277	4 000	80	50 000	3 400	Bronze	7H x 7V	100	70	6
65593	LFL/S2/50W/40K/YK/120-277/BRZ/STD	50	120-277	4 000	80	50 000	6 000	Bronze	7H x 7V	175	150	6

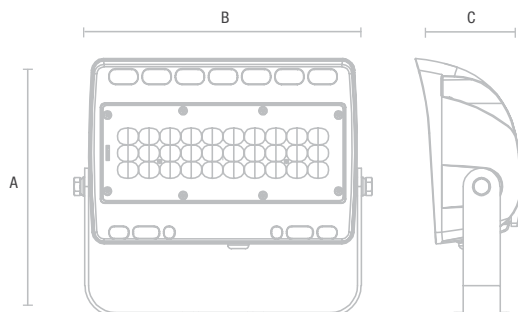

Dimensions	30 W	50 W
A	7 3/16" (183 mm)	8 1/4" (210 mm)
B	7 13/16" (198 mm)	9 1/2" (242 mm)
C	3 1/16" (78 mm)	3 9/16" (90 mm)

Lumen values are derived from photometric testing.
For a complete list of DLC qualified products, please visit www.standardpro.com.




Knuckle 12 W



Knuckle 30, 50 W

Order code	Description	Watts (W)	Volts (V)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Finish	NEMA type	Traditionnal equivalent (W) MH HPS	Case qty (master)
65583	LFL/S2/12W/30K/KN/120-277/BRZ/STD	12	120-277	3 000	80	50 000	1 270	Bronze	7H x 6V	50 35	8
65584	LFL/S2/12W/30K/KN/120-277/WH/STD	12	120-277	3 000	80	50 000	1 270	White	7H x 6V	50 35	8
65585	LFL/S2/12W/30K/KN/120-277/BLK/STD	12	120-277	3 000	80	50 000	1 300	Black	7H x 6V	50 35	12
65587	LFL/S2/12W/40K/KN/120-277/WH/STD	12	120-277	4 000	80	50 000	1 400	White	7H x 6V	50 35	12
65586	LFL/S2/12W/40K/KN/120-277/BRZ/STD	12	120-277	4 000	80	50 000	1 400	Bronze	7H x 6V	50 35	12
65588	LFL/S2/12W/40K/KN/120-277/BLK/STD	12	120-277	4 000	80	50 000	1 400	Black	7H x 6V	50 35	12
65590	LFL/S2/30W/30K/KN/120-277/BRZ/STD	30	120-277	3 000	80	50 000	3 200	Bronze	7H x 7V	100 70	6
65589	LFL/S2/30W/40K/KN/120-277/BRZ/STD	30	120-277	4 000	80	50 000	3 400	Bronze	7H x 7V	100 70	6
65592	LFL/S2/50W/40K/KN/120-277/BRZ/STD	50	120-277	4 000	80	50 000	6 000	Bronze	7H x 7V	175 150	6

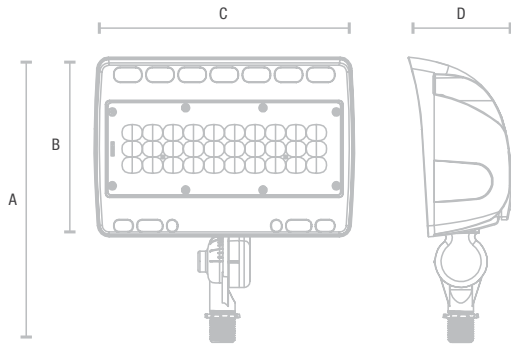

Dimensions	12 W	30 W	50 W
A	5 5/8" (143 mm)	6 7/8" (175 mm)	9 13/32" (239 mm)
B	3 1/4" (83 mm)	4 3/4" (121 mm)	5 15/16" (151 mm)
C	4 3/4" (120 mm)	6 7/8" (175 mm)	8 5/8" (219 mm)
D	2 5/8" (66 mm)	3 1/16" (78 mm)	3 9/16" (90 mm)

Accessories

Order code	Description	Type	Finish	Compatible with
64150 ¹	KN/ACC/WPCOVER/BRZ/STD	Weather proof cover plate	Bronze	63323, 65586, 65589, 65590, 65592
64208 ¹	KN/ACC/WPCOVER/WH/STD	Weather proof cover plate	White	64217, 65587
64209 ¹	KN/ACC/WPCOVER/BLK/STD	Weather proof cover plate	Black	65585, 65588





¹ 2 screws (10/24") and foam plate included with weather proof cover plate



FLB Series

This versatile family of highly efficient and powerful LED flood lights features a wide range of lumen packages, external selectable power switches on certain configurations and multiple color temperature options as well as various mounting options. Finished in bronze, with its modern

design, each luminaire is compatible with various universal mountings which allow for wall, ground and pole mount. Typical applications include general lighting of grounds, storage yards, car dealerships, parking areas as well as flood lighting of signs and building facades.

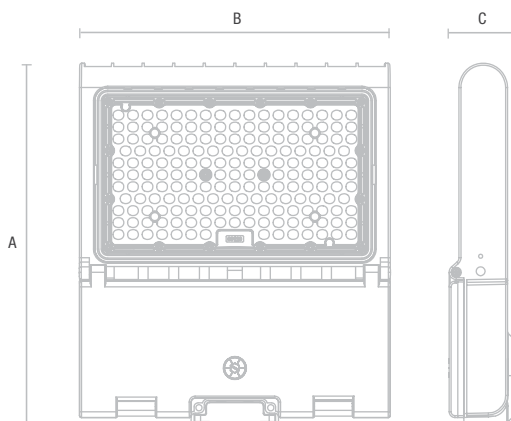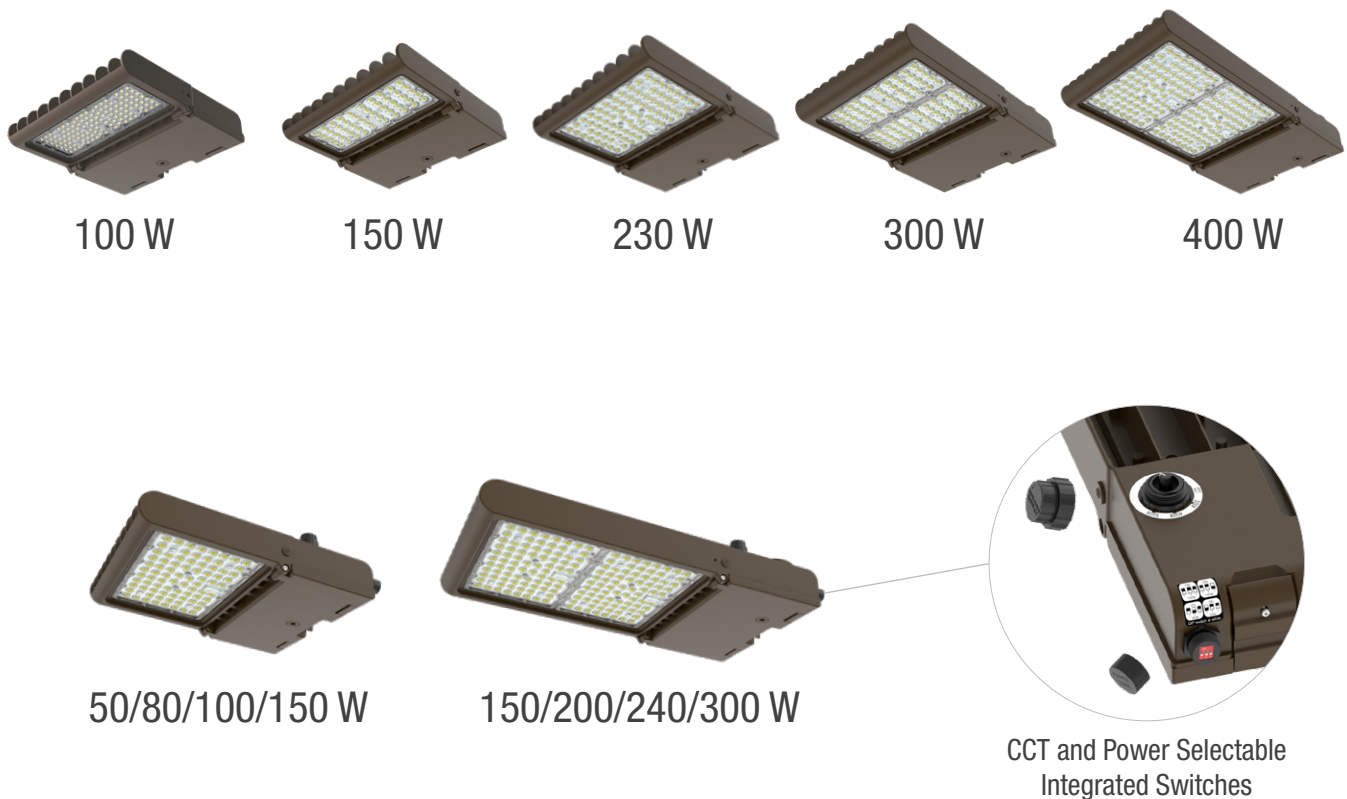

Dimensions	100 W 150 W	230 W 50/80/100/150 W	300 W	400 W 150/200/240/300 W
A	12 1/4" (312 mm)	14 3/4" (375 mm)	17 7/8" (454 mm)	22 3/8" (569 mm)
B	12 5/8" (320 mm)	12 5/8" (320 mm)	12 5/8" (320 mm)	12 5/8" (320 mm)
C	2 5/8" (65 mm)	2 5/8" (65 mm)	2 3/4" (70 mm)	2 3/4" (70 mm)

Order code	Model number	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Distribution type	Finish	Dimming	B.U.G	EPA (ft²)	Life L70 (hrs)	LED current (mA)	Power factor	THD (%)	Traditional equivalent (W)		Case qty (master)
																	MH	HPS	
Single Power and Single CCT																			
68547	FLBS-L1AM-W-4K-BR	100	120-277	4000	13 127	131	70	7Hx6V	Bronze	Yes	B3-U0-G2	1.07	>60 000	0.87-0.38	0.997	5.34	250-400	250-400	1
68548	FLBS-L1AM-I-4K-BR	102	347-480	4000	13 753	135	70	7Hx6V	Bronze	Yes	B3-U0-G2	1.07	>60 000	0.5	0.907	12.82	250-400	250-400	1
68549	FLBS-L2AM-W-4K-BR	151	120-277	4000	21 316	141	70	7Hx6V	Bronze	Yes	B4-U0-G3	1.07	>60 000	1.412-0.601	0.995	5.14	400-1 000	400-1 000	1
68550	FLBS-L2AM-I-4K-BR	151	347-480	4000	20 649	137	70	7Hx6V	Bronze	Yes	B4-U0-G3	1.07	>60 000	0.8	0.934	10.49	400-1 000	400-1 000	1
68551	FLBM-L3AM-W-4K-BR	234	120-277	4000	33 728	144	70	7Hx7V	Bronze	Yes	B5-U0-G3	1.3	>60 000	2.191-0.947	0.997	6.01	400-1 000	400-1 000	1
68552	FLBM-L3AM-I-4K-BR	230	347-480	4000	31 954	139	70	7Hx7V	Bronze	Yes	B5-U0-G3	1.3	>60 000	1.8	0.922	12.53	400-1 000	400-1 000	1
68553	FLBL-L4AM-W-4K-BR	300	120-277	4000	41 709	139	70	7Hx6V	Bronze	Yes	B5-U0-G3	1.56	>60 000	2.703-1.168	0.998	5.87	400-1 000	1 000	1
68554	FLBL-L4AM-I-4K-BR	283	347-480	4000	40 569	144	70	7Hx6V	Bronze	Yes	B5-U0-G3	1.56	>60 000	1.5	0.905	16.26	400-1 000	1 000	1
68555	FLBX-L5AM-W-4K-BR	396	120-277	4000	58 000	145	70	7Hx7V	Bronze	Yes	B5-U0-G4	1.96	>60 000	3.618-1.613	0.998	2.91	1 000	1 000	1
68556	FLBX-L5AM-I-4K-BR	400	347-480	4000	57 654	144	70	7Hx7V	Bronze	Yes	B5-U0-G4	1.96	>60 000	2.09	0.955	7.56	1 000	1 000	1
68557	FLBS-L1AM-W-5K-BR	100	120-277	5000	13 255	133	70	7Hx6V	Bronze	Yes	B3-U0-G2	1.07	>60 000	0.87-0.38	0.997	5.34	250-400	250-400	1
68558	FLBS-L1AM-I-5K-BR	102	347-480	5000	13 889	136	70	7Hx6V	Bronze	Yes	B3-U0-G2	1.07	>60 000	0.5	0.907	12.82	250-400	250-400	1
68559	FLBS-L2AM-W-5K-BR	151	120-277	5000	21 518	142	70	7Hx6V	Bronze	Yes	B4-U0-G3	1.07	>60 000	1.412-0.601	0.995	5.14	400-1 000	400-1 000	1
68560	FLBS-L2AM-I-5K-BR	151	347-480	5000	20 846	138	70	7Hx6V	Bronze	Yes	B4-U0-G3	1.07	>60 000	0.8	0.934	10.49	400-1 000	400-1 000	1
68561	FLBM-L3AM-W-5K-BR	234	120-277	5000	34 040	146	70	7Hx7V	Bronze	Yes	B5-U0-G3	1.3	>60 000	2.191-0.947	0.997	6.01	400-1 000	400-1 000	1
68562	FLBM-L3AM-I-5K-BR	230	347-480	5000	32 239	140	70	7Hx7V	Bronze	Yes	B5-U0-G3	1.3	>60 000	1.8	0.922	12.53	400-1 000	400-1 000	1
68563	FLBL-L4AM-W-5K-BR	300	120-277	5000	42 098	140	70	7Hx6V	Bronze	Yes	B5-U0-G3	1.56	>60 000	2.703-1.168	0.998	5.87	400-1 000	1 000	1
68564	FLBL-L4AM-I-5K-BR	283	347-480	5000	40 945	145	70	7Hx6V	Bronze	Yes	B5-U0-G3	1.56	>60 000	1.5	0.905	16.26	400-1 000	1 000	1
68565	FLBX-L5AM-W-5K-BR	396	120-277	5000	58 000	146	70	7Hx7V	Bronze	Yes	B5-U0-G4	1.96	>60 000	3.618-1.613	0.998	2.91	1 000	1 000	1
68566	FLBX-L5AM-I-5K-BR	400	347-480	5000	58 148	145	70	7Hx7V	Bronze	Yes	B5-U0-G4	1.96	>60 000	2.09	0.955	7.56	1 000	1 000	1

Power and CCT Select

68567	FLBM-PS150M-W-3C-BR	50/80/150	120-277	3 000/4 000/5 000	6 950/11 200/13 500/18 900 ¹	125	70	7Hx7V	Bronze	Yes	B4-U0-G1	1.3	>54 000	1.411-0.595	0.995	5.73	175-400	150-400	1
68568	FLBX-PS300M-W-3C-BR	150/200/240/300	120-277	3 000/4 000/5 000	23 000/29 100/33 600/37 500 ¹	129	70	7Hx7V	Bronze	Yes	B4-U0-G1	1.96	>54 000	2.64-1.18	0.998	4.26	400-1 000	400-1 000	1

Quick and Easy Mounting accessories (Sold separately)²

Order code	Description
68569	Bronze Yoke for FLBS-FLBM
68570	Bronze Yoke for FLBL-FLBX
68571	Bronze Slipfitter
68572	Bronze square/round Pole arm
68573	Bronze Trunnion
68574	Bronze Wall/Pole mount adapter ³
68717	Bronze Slipfitter and Wall mount adapter



¹ Lumen values are based on 4 000 K default settings. Please refer to the Spec Sheet for more details on other color temperatures.

² Black and White accessories are available. Please refer to the Spec Sheet.

³ Wall mount adapter used conjunctively with Slipfitter.

⁴ Only some configurations of FLB Series.


Lumen values are derived from photometric testing.

For a complete list of DLC qualified products, please visit www.standardpro.com.


Flood and Area Lights

This modern design is a family of highly efficient and powerful LED flood lights and area lights available in five different lumen packages. Typical applications include general lighting of grounds, storage yards, car dealerships,

parking areas as well as flood lighting of signs and building fronts. This series is a great addition to any commercial or industrial lighting application.



YOKE Dimensions	100 - 150 W	230 W	300 W	400 W
A	13 7/16" (341 mm)	13 3/8" (340 mm)	13 9/16" (344 mm)	16 15/16" (430 mm)
B	14 3/16" (360 mm)	17 1/8" (435 mm)	23 9/16" (599 mm)	27 5/8" (702 mm)
C	3 7/16" (88 mm)	3 7/16" (88 mm)	2 3/4" (70 mm)	3 1/4" (82 mm)



SLIPFITTER Dimensions	100 - 150 W	230 W	300 W	400 W
A	12 5/8" (320 mm)	12 5/8" (320 mm)	12 5/8" (320 mm)	16 15/16" (430 mm)
B	20 3/8" (518 mm)	23 9/16" (598 mm)	27 7/8" (708 mm)	31 7/16" (798 mm)
C	3 7/16" (87 mm)	3 7/16" (87 mm)	3 11/16" (93 mm)	3 1/4" (82 mm)

Lumen values are derived from photometric testing.
For a complete list of DLC qualified products, please visit www.standardpro.com.

Order code	Model number	DLC unique ID	Watts (W)	Volts (V)	Lumen output (lm)	Efficiency (lm/W)	CRI	NEMA type	Life L70 (hrs)	Finish	Dimming (Yes/No)	EPA	B.U.G	LED current (mA)	Power factor	THD (%)	Traditional equivalent (W) HM SHP	Case qty (master)
4 000 K - YOKE																		
66879	FL/S3/100-277/100W/40K/YK/BZ/STD	PLH1WX0XVSK2	100	120-277	13 494	139	70	7H x 6V	50 000	Bronze	Yes	1.22	3-0-2	1 500	0.90	<20	400 175	1
66887	FL/S3/100-277/150W/40K/YK/BZ/STD	PL6GKQL8TXJH	150	120-277	20 680	138	70	7H x 6V	50 000	Bronze	Yes	1.22	4-0-3	1 800	0.90	<20	400 400	1
66920	FL/S3/277-480/150W/40K/YK/BZ/STD	PLPKUOEI3V3T	150	347-480	21 618	139	70	7H x 6V	50 000	Bronze	Yes	1.22	4-0-3	880	0.90	<20	400 400	1
66924	FL/S3/100-277/230W/40K/YK/BZ/STD	PLXHZ088L4EJ	230	120-277	31 312	138	70	7H x 6V	50 000	Bronze	Yes	1.91	5-0-3	2 500	0.90	<20	400 400	1
66928	FL/S3/277-480/230W/40K/YK/BZ/STD	PLCDNAXLW3TJ	230	347-480	32 456	137	70	7H x 6V	50 000	Bronze	Yes	1.91	5-0-3	1 400	0.90	<20	400 400	1
66932	FL/S3/100-277/300W/40K/YK/BZ/STD	PLV71ACK4BU3	300	120-277	41 169	135	70	7H x 6V	50 000	Bronze	Yes	2.47	5-0-3	3 500	0.90	<20	1 000 1 000	1
66936	FL/S3/277-480/300W/40K/YK/BZ/STD	PLXILX176T51	300	347-480	41 902	139	70	7H x 6V	50 000	Bronze	Yes	2.47	5-0-3	1 800	0.90	<20	1 000 1 000	1
66940	FL/S3/100-277/400W/40K/YK/BZ/STD	PLEDM80Y83N2	400	120-277	52 340	129	70	7H x 6V	50 000	Bronze	Yes	3.1	5-0-3	5 000	0.90	<20	1 000 1 000	1
66944	FL/S3/277-480/400W/40K/YK/BZ/STD	PLGNY5S21926	400	347-480	52 413	130	70	7H x 6V	50 000	Bronze	Yes	3.1	5-0-3	2 800	0.90	<20	1 000 1 000	1
4 000 K - SLIPFITTER																		
66881	ARL/S3/100-277/100W/40K/III/SF/BZ/STD	PLR4ROQ89MEE	100	120-277	13 475	138	70	III	50 000	Bronze	Yes	1.22	3-0-3	1 500	0.90	<20	250 200	1
66889	ARL/S3/100-277/150W/40K/III/SF/BZ/STD	PLZTMPZVSG1N	150	120-277	20 680	138	70	III	50 000	Bronze	Yes	1.22	3-0-3	1 800	0.90	<20	400 400	1
66922	ARL/S3/277-480/150W/40K/III/SF/BZ/STD	PL211W8KHU4R	150	347-480	21 618	140	70	III	50 000	Bronze	Yes	1.22	3-0-3	880	0.90	<20	400 400	1
66926	ARL/S3/100-277/230W/40K/III/SF/BZ/STD	PLV71ACK4BU3	230	120-277	31 312	138	70	III	50 000	Bronze	Yes	1.91	4-0-5	2 500	0.90	<20	400 400	1
66930	ARL/S3/277-480/230W/40K/III/SF/BZ/STD	PLHE29Q80PKD	230	347-480	32 456	137	70	III	50 000	Bronze	Yes	1.91	4-0-5	1 400	0.90	<20	400 400	1
66934	ARL/S3/100-277/300W/40K/III/SF/BZ/STD	PLEONHVLVCEP	300	120-277	40 894	134	70	III	50 000	Bronze	Yes	2.47	4-0-5	3 500	0.90	<20	1 000 1 000	1
66938	ARL/S3/277-480/300W/40K/III/SF/BZ/STD	PLDJ8V0AHS67	300	347-480	41 902	139	70	III	50 000	Bronze	Yes	2.47	4-0-5	1 800	0.90	<20	1 000 1 000	1
66942	ARL/S3/100-277/400W/40K/III/SF/BZ/STD	PLJDLJL660FY	400	120-277	51 343	127	70	III	50 000	Bronze	Yes	3.1	5-0-5	5 000	0.90	<20	1 000 1 000	1
66946	ARL/S3/277-480/400W/40K/III/SF/BZ/STD	PLD3JZ0M7NAL4	400	347-480	51 414	128	70	III	50 000	Bronze	Yes	3.1	5-0-5	2 800	0.90	<20	1 000 1 000	1
5 000 K - YOKE																		
66880	FL/S3/100-277/100W/50K/YK/BZ/STD	PL0VOIK0QWET	100	120-277	13 494	139	70	7H x 6V	50 000	Bronze	Yes	1.22	3-0-2	817	0.90	<20	400 175	1
66884	FL/S3/277-480/100W/50K/YK/BZ/STD	PLKAH4E6NOKU	100	347-480	14 279	147	70	7H x 6V	50 000	Bronze	Yes	1.22	3-0-2	219 - 388	0.90	<20	400 175	1
66888	FL/S3/100-277/150W/50K/YK/BZ/STD	PLS391KP8A5B	150	120-277	20 680	138	70	7H x 6V	50 000	Bronze	Yes	1.22	4-0-3	1 250	0.90	<20	400 400	1
66921	FL/S3/277-480/150W/50K/YK/BZ/STD	PLZ3F5T5Q47L	150	347-480	21 618	140	70	7H x 6V	50 000	Bronze	Yes	1.22	4-0-3	392 - 557	0.90	<20	400 400	1
66925	FL/S3/100-277/230W/50K/YK/BZ/STD	PL84R1CFI4TY	230	120-277	31 312	138	70	7H x 6V	50 000	Bronze	Yes	1.91	5-0-3	1 893	0.90	<20	400 400	1
66929	FL/S3/277-480/230W/50K/YK/BZ/STD	PLR7HX5P9T8E	230	347-480	32 456	138	70	7H x 6V	50 000	Bronze	Yes	1.91	5-0-3	491 - 833	0.90	<20	400 400	1
66933	FL/S3/100-277/300W/50K/YK/BZ/STD	PLEGM3W7X9OX	300	120-277	41 924	137	70	7H x 6V	50 000	Bronze	Yes	2.47	5-0-3	2 476	0.90	<20	1 000 1 000	1
66937	FL/S3/277-480/300W/50K/YK/BZ/STD	PLIYEFTYLVKX	300	347-480	41 902	139	70	7H x 6V	50 000	Bronze	Yes	2.47	5-0-3	628 - 1117	0.90	<20	1 000 1 000	1
66941	FL/S3/100-277/400W/50K/YK/BZ/STD	PLBLB7RFSRE3	400	120-277	52 340	129	70	7H x 6V	50 000	Bronze	Yes	3.1	5-0-3	3 376	0.90	<20	1 000 1 000	1
66945	FL/S3/277-480/400W/50K/YK/BZ/STD	PLIZCSM62K6L	400	347-480	52 413	130	70	7H x 6V	50 000	Bronze	Yes	3.1	5-0-3	857 - 1 444	0.90	<20	1 000 1 000	1
5 000 K - SLIPFITTER																		
66882	ARL/S3/100-277/100W/50K/III/SF/BZ/STD	PLWZNUMK9W3H	100	120-277	15 575	152	70	III	50 000	Bronze	Yes	1.22	3-0-3	824	0.90	<20	250 200	1
66886	ARL/S3/277-480/100W/50K/III/SF/BZ/STD	PLBSVZZL1EQ	100	347-480	14 687	151	70	III	50 000	Bronze	Yes	1.22	3-0-3	220 - 389	0.90	<20	250 200	1
66919	ARL/S3/100-277/150W/50K/III/SF/BZ/STD	PL4BW0XAEPY	150	120-277	19 889	133	70	III	50 000	Bronze	Yes	1.22	3-0-3	1 285	0.90	<20	400 400	1
66923	ARL/S3/277-480/150W/50K/III/SF/BZ/STD	PLI1Q4E2DT20	150	347-480	21 618	140	70	III	50 000	Bronze	Yes	1.22	3-0-3	330 - 593	0.90	<20	400 400	1
66927	ARL/S3/100-277/230W/50K/III/SF/BZ/STD	PLXC49HPXBU3	230	120-277	31 312	138	70	III	50 000	Bronze	Yes	1.91	4-0-5	1 969	0.90	<20	400 400	1
66931	ARL/S3/277-480/230W/50K/III/SF/BZ/STD	PL57CPNK6G0G	230	347-480	32 456	138	70	III	50 000	Bronze	Yes	1.91	4-0-5	508 - 856	0.90	<20	400 400	1
66935	ARL/S3/100-277/300W/50K/III/SF/BZ/STD	PLXP96QRLU467	300	120-277	41 653	137	70	III	50 000	Bronze	Yes	2.47	4-0-5	2 474	0.90	<20	1 000 1 000	1
66939	ARL/S3/277-480/300W/50K/III/SF/BZ/STD	PLSJ0DFS6E1Z	300	347-480	41 902	139	70	III	50 000	Bronze	Yes	2.47	4-0-5	631 - 117	0.90	<20	1 000 1 000	1
66943	ARL/S3/100-277/400W/50K/III/SF/BZ/STD	PLRZE199GYPD	400	120-277	51 343	127	70	III	50 000	Bronze	Yes	3.1	5-0-5	3 379	0.90	<20	1 000 1 000	1
66947	ARL/S3/277-480/400W/50K/III/SF/BZ/STD	PLQZ89D9DVOE	400	277-480	51 414	128	70	III	50 000	Bronze	Yes	3.1	5-0-5	896-14 405	0.90	<20	1 000 1 000	1

Accessories

Order code	Description	Type	Finish	Compatible with
67055	LFL/L/S2/ACC/SF/SQR POLE MOUNT/STD	Straight arm	Bronze	66881, 66889, 66922, 66926, 66930, 66934, 66938, 66942, 66946
66155	LFL/L/S2/ACC/SF/SQR POLE MOUNT/STD	Slip fitter to square pole mount	Bronze	66881, 66889, 66922, 66926, 66930, 66934, 66938, 66942, 66946
66702	LFL/L/S2/ACC/MA/RND POLE MOUNT/STD	Straight arm to round pole mount 4", 5" & 6"	Bronze	66881, 66889, 66922, 66926, 66930, 66934, 66938, 66942, 66946








Yard Light

The YDD-L is an energy efficient dusk to dawn yard light. It was designed for barns and farms. It is a versatile and economic light source that is good on the environment and uses long life LED's. The YDD-L comes standard with a photocontrol which helps to provide significant power savings. It includes an installation bracket for pole and wall mounting and a 21" arm for ease and versatility of installation. All units come standard with 3' of cable to facilitate the connection to the junction box when mounting with the pole arm.



Order code	Description	DLC unique ID	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Power factor	THD (%)	Traditional equivalent (W)	Case qty (master)
68189	YDD-LS2B-W/4KPT	PLYI1NITGAY	56	120-277	4 000	6 843	123	82.7	>54 000	0.75-0.98	9	130	4
68190	YDD-LS2B-W/5KPT	PLCH4KAZLSW1	56	120-277	5 000	7 333	130	84.6	>54 000	0.75-0.98	9	140	4

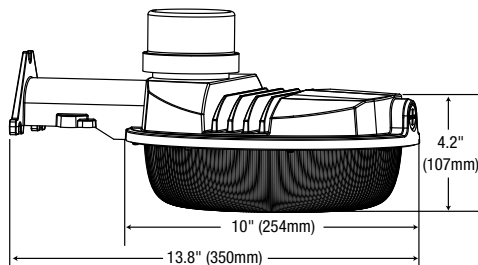

Accessory


Part number	Type
PH0009	Shorting cap

Lumen values are derived from photometric testing.



Lamp post

LED post top luminaire offers a contemporary and elegant look making it a great addition to applications where energy efficiency, performance and design are essential. Typical applications include urban streets, walkways, parks, shopping malls, residential areas, and campuses.

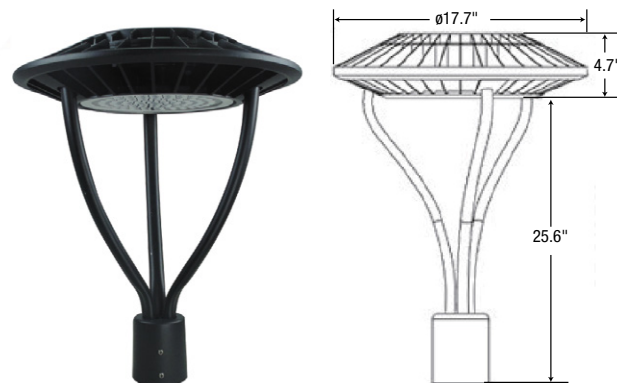

Order code	Model number	DLC unique ID	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	LED current (mA)	Power factor	THD (%)	EPA (ft²)	Traditional equivalent (W) MH	HPS	Case qty (master)
68175	RDE-LS15-W/40KBKPR	PLQ020PUB9XO	64	120-277	4 000	6 766	105	80	42 000	101	0.99-0.99	10.5-11.9	1.96	175	150	1
68177	RDE-LS25-W/40KBKPR	PLFBL67QJL6K	80	120-277	4 000	8 817	110	80	42 000	80	0.97-0.99	4-10.3	1.96	250	175	1
68179	RDE-LS35-W/40KBKPR	PLCR51LCZZVP	150	120-277	4 000	16 000	106	70	42 000	84	0.97-1.0	4.2-6.6	1.96	400	250-400	1
68176	RDE-LS15-W/50KBKPR	PLTD23704VW4	63	120-277	5 000	6 750	107	80	42 000	101	0.99-0.99	10.5-11.9	1.96	175	150	1
68178	RDE-LS25-W/50KBKPR	PLBNTKQV3K5S	80	120-277	5 000	8 950	112	80	54 000	80	0.97-0.99	4-10.3	1.96	250	175	1
68180	RDE-LS35-W/50KBKPR	PLOY2BH5CN5B	150	120-277	5 000	16 200	108	70	54 000	84	0.97-1.0	4.2-6.6	1.96	400	250-400	1



Bollard


LED outdoor bollards are perfect for lighting pathways and entryways. They will fit seamlessly into the landscape and add a decorative touch to your building. They will also provide adequate lighting for increased safety on your property.

Offered in two diffuser styles: Louver replicates the traditional look and cone allows for a larger lumen output.



Louver Cone

Order code	Description	Watts (W)	Volts (V)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Finish	Distrib. type	Traditionnal equivalent (W) MH	Case qty (master)
Louver											
65530	LBOL8/LOUV/25W/40K/120-277/RND/BRZ/STD	25	120-277	4 000	70	50 000	1 325	Bronze	V	50/70	1
Cone											
65531	LBOL8/CONE/25W/40K/120-277/RND/BRZ/STD	25	120-277	4 000	70	50 000	1 925	Bronze	V	50/70	1



Lumen values are derived from photometric testing.
For a complete list of DLC qualified products, please visit www.standardpro.com.



Under canopy and garage

The IFS-L is an efficient under canopy and garage light. Its rugged construction easily installs on junction boxes and is available in 2 lumen packages. High quality thermal heat


sinks dissipate the LED heat and insure reliable long life. This luminaire is a great addition to any commercial or industrial application.




Order code	Model number	DLC unique ID	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	LED current (mA)	Power factor	THD (%)	Traditional equivalent (W)	Case qty (master)
68013	IFS-LS1-W/40K-BZ	PLWNQXWX9HGK	40	120-277	4 000	5 129	131	80	>54 000	0.33-0.14	0.90	15	100	6
68014	IFS-LS1-W/50K-BZ	PLZZZHMT40EY	40	120-277	5 000	5 295	135	80	>54 000	0.33-0.14	0.90	15	100	6
68015	IFS-LS1-Q/40K-BZ	PLSLXGKD02TO	40	120-347	4 000	5 878	141	80 +	>54 000	0.34-0.12	0.95	16	100	6
68016	IFS-LS1-Q/50K-BZ	PLW4I5NT1NN3	40	120-347	5 000	5 965	142	80 +	>54 000	0.34-0.12	0.95	16	100	6
68017	IFS-LS2-Q/40K-BZ	PL96I8K0LPWI	60	120-347	4 000	8 034	135	80 +	>54 000	0.51-0.18	0.96	15	175	4
68018	IFS-LS2-Q/50K-BZ	PLTQPHIFNTRF	60	120-347	5 000	8 147	137	80 +	>54 000	0.51-0.18	0.96	15	175	4



S1



S2



Accessory

Part number	Type
PH0008	347 V button type photocell

Lumen values are derived from photometric testing.
For a complete list of DLC qualified products, please visit www.standardpro.com.




Security Light

LED security lights are perfect for applications such as yards, walkways, driveways, patios, parking lots and loading areas. They can easily replace traditional luminaires while offering superior performance and savings on energy consumption.

The security lights are equipped with a motion sensor allowing you to set the lights to turn ON when motion is detected during daytime or night time. This ensures that the area is well lit and provides added security at night.



Order code	Model number	Watts	Volts	Color temp.	Lumen output	Efficiency	CRI	Finish	Dimming	LED current	Power factor	THD	Traditional equivalent (W)		Case qty (master)
		(W)	(V)	(K)	(lm)	(lm/W)			(Yes/No)	(mA)		(%)	MH	HPS	
68005	ESL-LS1-A/30K-BR	24 (2 x 12)	120	3 000	2 242	93	80	Bronze	No	220	0.9	≤20	50	70	8
68007	ESL-LS1-A/30K-WH	24 (2 X 12)	120	3 000	2 242	93	80	White	No	220	0.9	≤20	50	70	8
68008	ESL-LS1-A/40K-BR	24 (2 X 12)	120	4 000	2 490	104	80	Bronze	No	220	0.9	≤20	50	70	8
68009	ESL-LS1-A/40K-WH	24 (2 x 12)	120	4 000	2 490	104	80	White	No	220	0.9	≤20	50	70	8

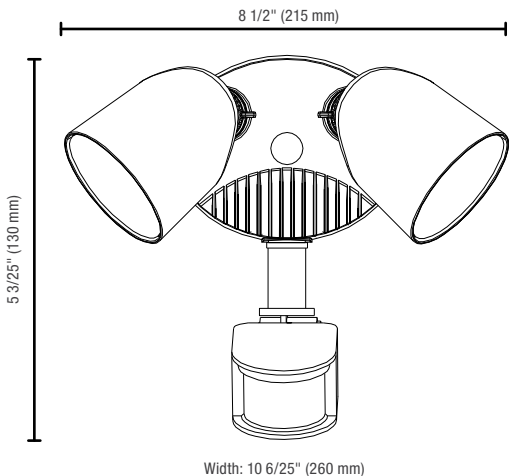

Lumen values are derived from photometric testing.


5 yrs
warranty

LED
fixture

66
wet
location

IP
66

ETL
Intertek

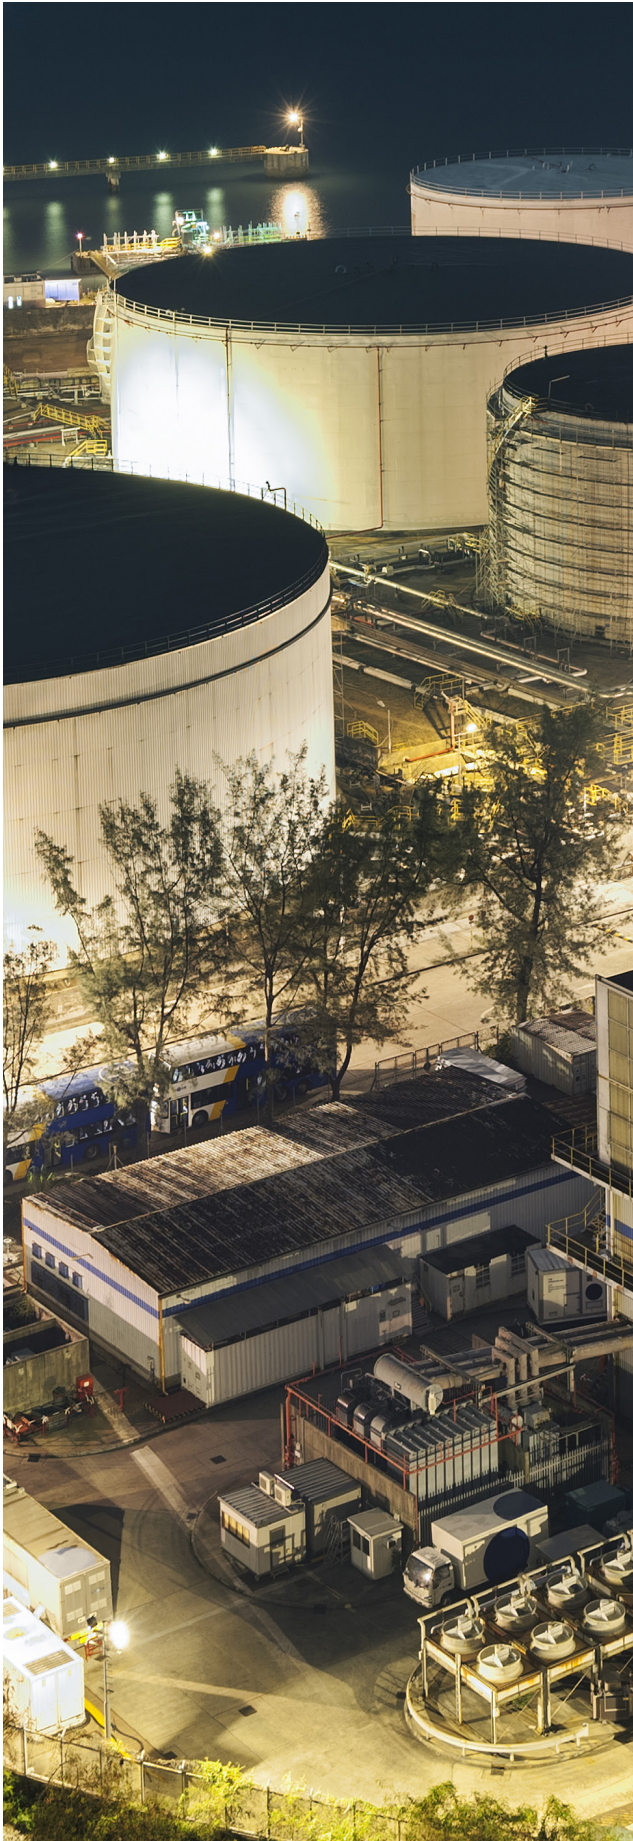


Hazardous Location Lighting

Stanpro is expanding capitalizing on its expertise and expanding its indoor and outdoor general lighting offering by introducing new linear fixtures, High Bays, Vapor Tights and Flood lights which are also designed and tested to operate in hazardous applications.

Flood Luminaire

The CDF-L Hazardous Location LED flood luminaire is designed for installations where moisture, dirt, dust, corrosion and vibration may be present, or in NEMA 3 and 4X locations where wind, water, snow or high ambient can be expected.


The CDF-L is also NEC/CEC certified to be used in hazardous environments where there is presence of flammable vapours or gases and combustible dusts.



CDF-L
Pendant mount



Pole mount




Ceiling mount




Wall mount

Part number	DLC unique ID	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Tested hours LM-80 (hrs)	LED current (mA)	Power factor	THD (%)	BUG	Beam angle (°)	Case qty (master)
CDF-L															
CDF-LS1-W-D/4K120T	-	80	120-277	4 000	10 059	126	70	>60 000	10 000	525	0.99	17	B4-U0-G1	120	1
CDF-LS2-W-D/4K120T	-	100	120-277	4 000	12 339	123	70	>60 000	10 000	525	0.99	15	B4-U0-G1	120	1
CDF-LS3-W-D/4K120T	-	150	120-277	4 000	18 122	121	70	>60 000	10 000	480	1.00	12	B4-U0-G1	120	1
CDF-LS1-W-D/5K120T	PL4BXFYSZ3V7	80	120-277	5 000	10 400	130	70	>60 000	10 000	525	0.99	17	B4-U0-G1	120	1
CDF-LS2-W-D/5K120T	PLLYWND1YSFE	100	120-277	5 000	13 000	130	70	>60 000	10 000	525	0.99	15	B4-U0-G1	120	1
CDF-LS3-W-D/5K120T	PLL4DFZFZ868	150	120-277	5 000	19 500	130	70	>60 000	10 000	480	1.00	12	B4-U0-G1	120	1
CDF-LS1-H-D/4K120T	-	80	347-480	4 000	9 979	125	70	>60 000	10 000	525	0.90	10	B4-U0-G1	120	1
CDF-LS2-H-D/4K120T	-	100	347-480	4 000	11 758	118	70	>60 000	10 000	525	0.94	8	B4-U0-G1	120	1
CDF-LS3-H-D/4K120T	-	150	347-480	4 000	17 718	118	70	>60 000	10 000	480	0.93	11	B4-U0-G1	120	1
CDF-LS1-H-D/5K120T	PLHLSH31B1KQ	80	347-480	5 000	10 400	130	70	>60 000	10 000	525	0.90	10	B4-U0-G1	120	1
CDF-LS2-H-D/5K120T	PLIUN056Y7F6	100	347-480	5 000	13 000	130	70	>60 000	10 000	525	0.94	8	B4-U0-G1	120	1
CDF-LS3-H-D/5K120T	PLYNB41BYCUT	150	347-480	5 000	19 500	130	70	>60 000	10 000	480	0.93	11	B4-U0-G1	120	1

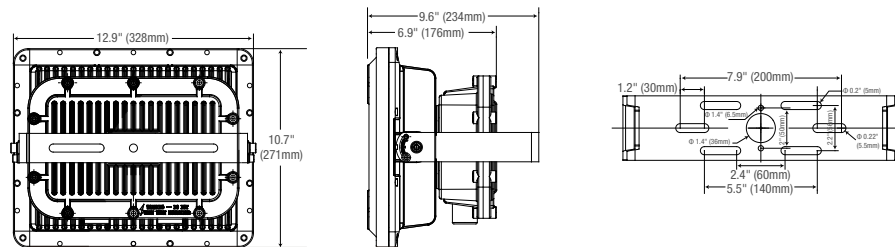


Accessories

Part number	Type
BKT763	Pole type stanchion NPT 2-3/8"
WGD068	Stainless steel wireguard
HAR1042	Stainless steel safety cable kit
BKT761-FL	U bracket

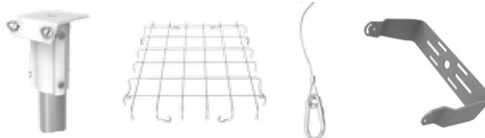


Lumen values are derived from photometric testing.
For a complete list of DLC qualified products,
please visit www.standardpro.com.



High Bay


The CDA-L Hazardous Location LED high bay is designed for installations where moisture dirt dust corrosion and vibration may be present or in NEMA 3 and 4X locations where wind water snow or high ambient temperatures can be expected. The CDA-L is also NEC/CEC certified to be used in hazardous environments where there is presence of flammable vapours or gases or combustible dusts.

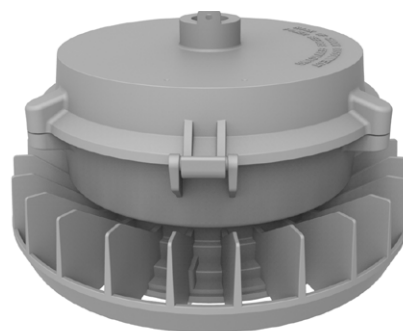


CDA-L

ACCESSORIES REQUIRED FOR OPTIONAL MOUNTING


PENDANT (standard)
MOUNTING ADAPTER "P"



CEILING/WALL MOUNT
BKT761-HB




CEILING/WALL STANCHION
(optional adapter)
MOUNTING ADAPTER "J"



CEILING MOUNT
JB018




WALL MOUNT
BKT771-25 or
BKT771-90



POLE MOUNT
BKT773-P166 or
BKT773-P1900




POLE MOUNT
BKT772-P166 or
BKT772-P1900




Part number	DLC unique ID	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Tested hours LM-80 (hrs)	LED current (mA)	Power factor	THD (%)	B.U.G. rating	Beam angle (°)	Case qty (master)
Pendant mount															
CDA-LS1-W-C/40K-TP	PL5EKC4WNJUT	45	120-277	4 000	6 750	140	70	54 000	9 000	42	1.00	13	B4-U0-G1	110	1
CDA-LS2-W-C/40K-TP	PLMFRG32T7AB	65	120-277	4 000	9 750	144	70	54 000	9 000	43	0.99	11	B4-U0-G1	110	1
CDA-LS1-W-C/50K-TP	PLOGIV5NHXS1	45	120-277	5 000	6 750	150	70	54 000	9 000	42	1.00	13	B4-U0-G1	110	1
CDA-LS2-W-C/50K-TP	PLQAXAKJYXCF	65	120-277	5 000	9 750	150	70	54 000	9 000	43	0.99	11	B4-U0-G1	110	1
CDA-LS1-H-C/40K-TP	-	45	347-480	4 000	6 750	157	70	54 000	9 000	37	0.97	13	B4-U0-G1	110	1
CDA-LS2-H-C/40K-TP	-	65	347-480	4 000	9 750	169	70	54 000	9 000	41	0.98	11	B4-U0-G1	110	1
CDA-LS1-H-C/50K-TP	-	45	347-480	5 000	6 750	156	70	54 000	9 000	37	0.97	13	B4-U0-G1	110	1
CDA-LS2-H-C/50K-TP	-	65	347-480	5 000	9 750	171	70	54 000	9 000	41	0.98	11	B4-U0-G1	110	1
Ceiling / Wall stanchion															
CDA-LS1-W-C/40K-TJ	PL5EKC4WNJUT	45	120-277	4 000	6 856	140	70	54 000	9 000	42	1.00	13	B4-U0-G1	110	1
CDA-LS2-W-C/40K-TJ	PLMFRG32T7AB	65	120-277	4 000	10 654	144	70	54 000	9 000	43	0.99	11	B4-U0-G1	110	1
CDA-LS1-W-C/50K-TJ	-	45	120-277	5 000	6 750	150	70	54 000	9 000	42	1.00	13	B4-U0-G1	110	1
CDA-LS2-W-C/50K-TJ	-	65	120-277	5 000	9 750	150	70	54 000	9 000	43	0.99	11	B4-U0-G1	110	1
CDA-LS1-H-C/40K-TJ	-	45	347-480	4 000	6 856	157	70	54 000	9 000	37	0.97	13	B4-U0-G1	110	1
CDA-LS2-H-C/40K-TJ	-	45	347-480	4 000	10 654	169	70	54 000	9 000	41	0.98	11	B4-U0-G1	110	1
CDA-LS1-H-C/50K-TJ	-	45	347-480	5 000	6 750	156	70	54 000	9 000	37	0.97	13	B4-U0-G1	110	1
CDA-LS2-H-C/50K-TJ	-	65	347-480	5 000	9 750	171	70	54 000	9 000	41	0.98	11	B4-U0-G1	110	1


Lumen values are derived from photometric testing.
For a complete list of DLC qualified products, please visit www.standardpro.com.

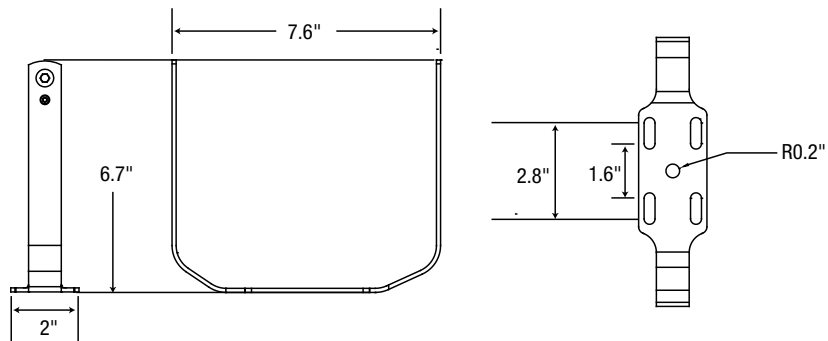

WITH FLAT LENS GLASS



WITH DROP LENS



Accessories to be used with “P” mounting adapter

Part number	Type
BKT761-HB	U-Bracket (SUS 304)
WGD070	Stainless steel wire guard
WGD071	Stainless steel wire guard for drop lens
HAR1056	Stainless steel safety cable kit




Accessories to be used with “J” mounting adapter

Part number	Type
JB018	Junction box NPT 3/4"
BKT771-25	Wall mount-25°
BKT771-90	Wall mount-90°
BKT772-P166	Stanchion-25° (NPT 1.25")
BKT772-P1900	Stanchion-25° (NPT 1.50")
BKT773-P166	Stanchion-90° (NPT 1.25")
BKT773-P1900	Stanchion-90° (NPT 1.50")
WGD070	Stainless steel wire guard
WGD071	Stainless steel wire guard for drop lens
HAR1056	Stainless steel safety cable kit



Linear Luminaire


The CDL-L Hazardous Location LED linear luminaire is designed for installations where moisture, dirt, dust, corrosion and vibration may be present. The CDL-L is also NEC/CEC certified to be used in hazardous environments where there is presence of flammable vapors or gases.

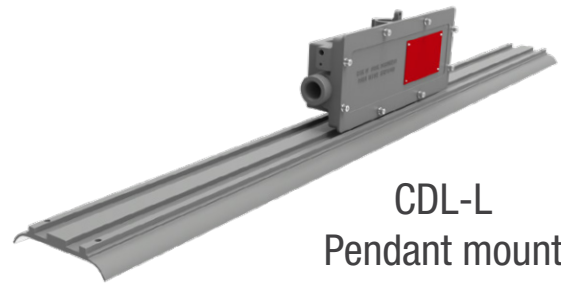


CDL-L
Pendant mount



Ceiling mount




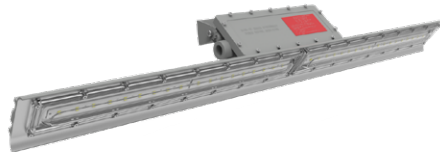


Wall mount

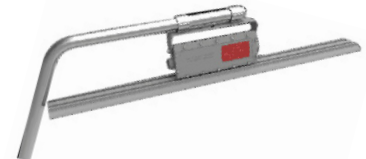

Pole mount

Part number	DLC unique ID	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Tested hours LM-80 (hrs)	LED current (mA)	Power factor	THD (%)	B.U.G. rating	Beam angle (°)	Case qty (master)
CDL-L															
CDL-LS1-W-C/40K-T	N/A	40	120-277	4 000	6 041	151	70	>54 000	9 000	84	1.00	16	B4-U0-G1	110	1
CDL-LS2-W-C/40K-T	N/A	80	120-277	4 000	12 231	153	70	>54 000	9 000	84	0.99	9	B4-U0-G1	110	1
CDL-LS1-W-C/50K-T	PLSH9Y90XVPQ	40	120-277	5 000	5 480	135	70	>54 000	9 000	84	1.00	16	B4-U0-G1	110	1
CDL-LS2-W-C/50K-T	PLZZSEDSND5V	80	120-277	5 000	10 960	137	70	>54 000	9 000	84	0.99	9	B4-U0-G1	110	1
CDL-LS1-H-C/40K-T	N/A	40	347-480	4 000	5 984	150	70	>54 000	9 000	84	0.89	16	B4-U0-G1	110	1
CDL-LS2-H-C/40K-T	N/A	80	347-480	4 000	11 761	147	70	>54 000	9 000	84	0.89	9	B4-U0-G1	110	1
CDL-LS1-H-C/50K-T	PLVCFPEVVADM	40	347-480	5 000	5 480	132	70	>54 000	9 000	84	0.89	16	B4-U0-G1	110	1
CDL-LS2-H-C/50K-T	PLUJ84YPCZY	80	347-480	5 000	10 960	137	70	>54 000	9 000	84	0.89	9	B4-U0-G1	110	1

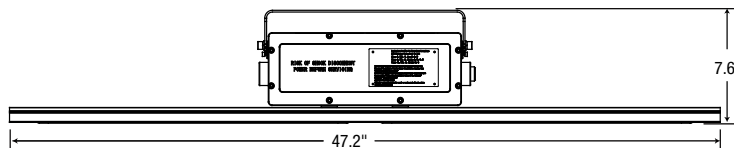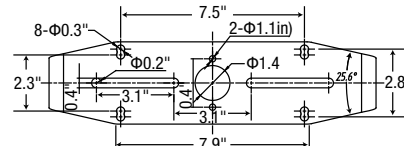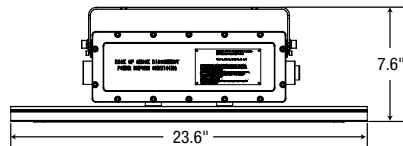

Accessories

Part number	Type
HAR1055	Stainless steel safety cable kit
BKT775	Stanchion mount pipe clamp (Include 2 pipes per box)
BKT761-LN	U-bracket



Lumen values are derived from photometric testing.
For a complete list of DLC qualified products,
please visit www.standardpro.com.





Temporary Work Light

Stanpro's Work Lights are ideal for projects where portable and temporary lighting is required, especially to provide a safe working environment when handling repairs, general maintenance or new construction. Find the perfect solution to illuminate your work area, whether it's for a wide area or to perform a specific task in a precise location.


Stanpro's temporary lighting products are made of robust material that are perfect for a rugged construction site where traditional lighting products would break easily.

String Light

Our String Lights were designed to provide temporary lighting in tough environments, whether you need lighting for a wide area or to perform a specific task. The String Lights are offered in lengths of 50' (15 m) and 100' (30 m) and are made of 12 or 14 AWG cable, which allows for them to be daisy-chained.



Order code	Description	Wire length	Wire	Maximum Watts per Socket	Volts (V)		Amperage	Socket	Number of Sockets	Lamp Guard Material	Case qty (master)
		ft (m)		(W)	(Sockets)	(String)	(A)				
String Light											
66850	SL/50FT/DSC/5SKT/12AWG/PLASTIC/YL/STD	50 (15)	SJTW 12 AWG / 3C	150	120	125	12	E26	5	Plastic	1
67770	SL/100FT/DSC/10SKT/14AWG/PLASTIC/YL/STD	100 (30)	SJTW 14 AWG / 3C	150	120	125	12	E26	10	Plastic	1

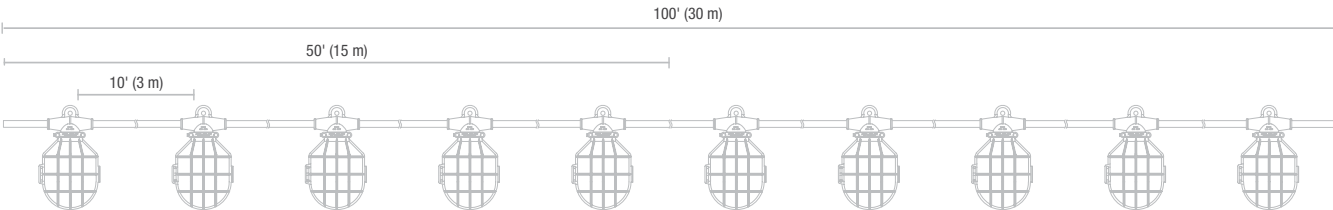

Accessories

Order code	Description	Type	Case qty (master)
66853	SL/CAGE/PLASTIC/YL/STD	Plastic cage replacement	50
66854	SL/SHOOK/METAL/STD 5P	Metal S hooks (Pack of 5)	1000



1_{yr}
warranty

 **dry location**

 **-40°C**





Temporary High Bay

Replacing traditional Metal Halide HID lamps and fixtures with our Temporary LED High Bay fixtures is a cost saving and energy efficient solution. The Temporary LED High Bays provide 360° illumination and will ensure that the work area is safe and fully illuminated. Moreover, their high efficacy will help reduce the number of luminaires needed; in addition, the daisy chain feature will enable the use of one outlet to power up to ten 60 W luminaires and six 100 W luminaires.

A wireless remote control is also provided with every temporary LED high bay. Control all your luminaires from only one remote if you desire!




60 W



100 W

Order code	Description	Watts (W)	Volts (V)	Color temp.	Wire	CRI	Lumen output (lm)	Beam angle (°)	Life L70 (hrs)	Operating position	Case qty (master)
67902	THB/DSC/60W/CW/ND/OR/STD	60	120	Cool White	18 AWG / 3C	80	6 300	360	54 000	Universal	4
67903	THB/DSC/100W/CW/ND/OR/STD	100	120	Cool White	18 AWG / 3C	80	10 500	360	54 000	Universal	4

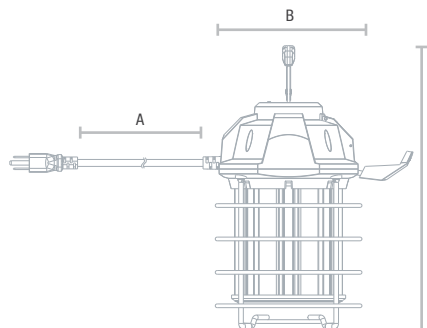

Dimensions	60 W	100 W
A	240" (6 196 mm)	240" (6 196 mm)
B	6 11/50" (158 mm)	6 11/50" (158 mm)
C	10 11/16" (271 mm)	12 1/16" (306 mm)

Accessory

Order code	Description	Type
67947	THB/REMOTECONTROL/STD	Replacement Wireless Remote Control



5 yrs
warranty



Portable Flood Light

Portable Flood Lights are easy to carry from one location to another as they are battery powered and highly versatile. They offer pre-set intensities to disperse the right amount of light for each task and to ensure more

efficient battery consumption. Their cordless feature keeps the ground free of cables, which creates a safer work environment. This product can be used on jobsites where electricity has yet to be installed.



Mini Flood 10 W




Flood 20 W



Flood 50 W

Order code	Description	Watts	Volts	Color Temp.	CRI	Light output	Beam angle	Lithium-ion Battery		Battery working time (hrs)		Battery charging time (hrs)	Case Qty
		(W)	(V)			(lm)	(°)	(V)	(Ah)	100% Brightness	Energy saving mode	(hrs)	
LED Mini Flood Light													
67023	MFL/BTRY/MGN/100-240/10W/CW/BL/STD	10	100-240	Cool White	70	450	120	3.7	2.0	2	4	3	50

Order code	Description	Watts	Volts	Color Temp.	CRI	Light output	Beam angle	Lithium-ion Battery		Battery working time (hrs)			Battery charging time (hrs)	Case qty
		(W)	(V)					(V)	(Ah)	100% Brightness	50% Brightness	20% Brightness		
LED Flood Light														
67021	PFL/BTRY/100-240/20W/CW/YL/STD	20	100-240	Cool White	70	1 100	120	7.4	4.4	3	6	12	5	8
67022	PFL/BTRY/100-240/50W/CW/YL/STD	50	100-240	Cool White	70	3 250	120	18.5	6.6	3	6	12	6	2

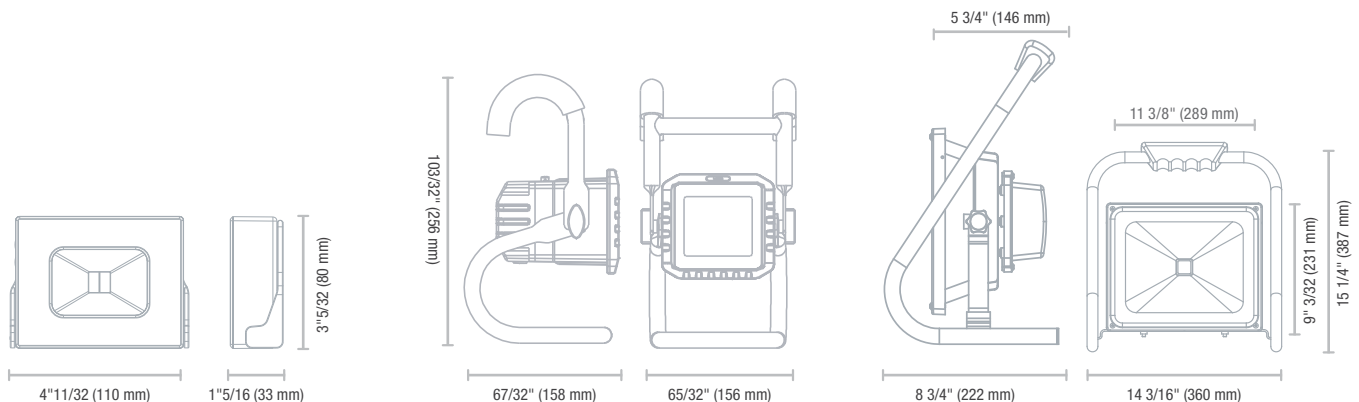

Mini Flood 10 W

Flood 20 W

Flood 50 W

Lumen values are derived from photometric testing
¹ LED Mini Flood Light only.

1_{yr}
warranty¹

3_{yrs}
warranty

dry location

battery powered


AC Flood Light

Stanpro's AC Flood Lights of 30 W and 50 W are the perfect combination of durability and efficiency. Offering a high light output and designed for wet locations, with an IP rating of 65, these luminaires will suit the most robust construction sites.

Magnetic feet are also available as accessories, allowing the AC Flood Lights to stick to any metallic surface. In addition, up-to two Flood Lights can be installed on the tripod.



Order code	Description	Watts	Volts	Color temp.	Wire	CRI	Light output (lm)	Beam angle (°)	Life L70 (h)	Case qty (master)
		(W)	(V)							
67336	PFL/AC/30W/CW/ND/YL/STD	30	120	Cool White	18 AWG	70	3 200	120	25 000	8
67337	PFL/AC/50W/CW/ND/YL/STD	50	120	Cool White	18 AWG	70	5 100	120	25 000	8

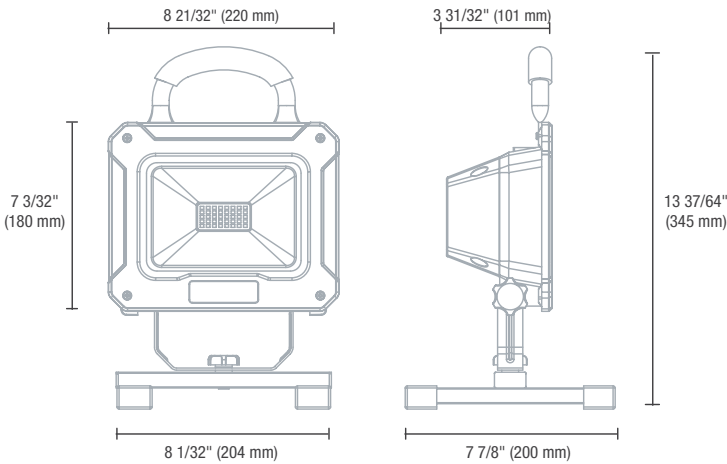

3
yrs
warranty

6
wet
location





Accessories



Order code	Description	Type	Compatible products	Qty per pack (units)	Case qty (master)
67338	PFL/AC/MAGNETICFEET/STD	Magnetic feet	AC Flood Lights - 30 W and 50 W	4	100




Order code	Description	Watts (W)	Lithium-ion battery			Battery Working Time (hrs)			Battery charging time (hrs)	Compatible products	Case qty (master)
			(V)	(Ah)		100% Brightness	50% Brightness	20% Brightness			
67024 ¹	PFL/REPLBTRY/7.4V/20W/YL/STD	20	7.4	4.4		3	6	12	5	20 W LED Flood Light	8

Replacement Battery

¹Only the battery of the 20 W Flood can be removed and replaced, the battery of the 50 W can't be interchanged as it is integrated in the luminaire.



Order code	Description	Volts (V)	Compatible products	Case qty (master)
Replacement AC/DC Charger				
67026	PFL/CHARGER/20W/STD	100-240	20 W LED Flood Light	25
67027	PFL/CHARGER/50W/STD	100-240	50 W LED Flood Light	25

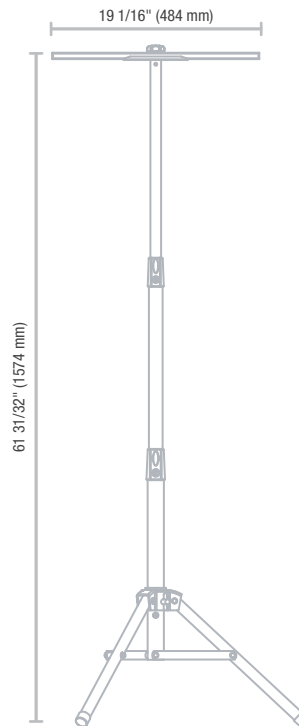

Order code	Description	Maximum Height		Maximum Height		Compatible products	Case qty (master)
		in	m	in	m		
67025	PFL/TRIPOD/YL/STD	62	1.56	26.7	0.66	20 W LED Flood Lights (3 units) 50 W LED Flood Lights (2 units) 30 W AC LED Flood Lights (2 units) 50 W AC LED Flood Lights (2 units)	1



Printed in Canada.

© 2021 STANDARD Products Inc. All Rights Reserved.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions.

All products are subject to change or may be discontinued any time without notice.

For the latest version, please refer to our website.

www.standardpro.com



STANPRO



standardpro.com

STANPRO