

Series Spec Sheet

RMS

STEEL

NBC2015 Compliant

The clean lines of the RMS series of commercial steel signs present a fully modern appearance. The steel provides for a rigid, durable and lightweight sign. Available in AC only, AC/DC and internally self-powered versions.

FEATURES AND SPECIFICATIONS

• Circuitry - AC & AC/DC

- LED ultra bright light source
- 120/277/347 VAC Input, field selectable
- 1.9 W power consumption single or double face
- Emergency DC wattages as follows:
6 VDC = 0.9 W, 12 VDC = 0.9 W, 24 VDC = 0.9 W

• Circuitry - CEREBRUM

- Emergency DC wattage as follow:
24 VDC = 0.10 A/2.4 W
- This unit can be connected to Cerebrum's smart battery unit. Please view the Cerebrum brochure for more details on this technology.

• Circuitry - Self-powered

- LED ultra bright light source
- 120/277/347 VAC Input, field selectable
- 2.0 W power consumption single or double face
- High-performance, Ni-Cad battery
- 90 or 120 minutes emergency duration
- Solid state transfer and battery charger

• Mechanical

- Rigid housing steel construction
- Universal faces
- Universal mounting: ceiling mount, wall mount, end mount
- White powder coat finish standard, other finishes and colors optional

• Approvals

- CSA Certified to C22.2 #141-15, C860

• Compliance

- Meets requirements of ICES-005



OVERVIEW

Light source	LED
Input voltage (VAC)	120/277/347
Input power	1.9 W AC & AC/DC (single or double face) 2W self-powered (single or double face)
DC voltage (VDC)	6, 12, 24
DC power (W)	0.9
DC power/voltage (Cerebrum)	24 V = 2.4 W



quick
ship



cerebrum
compatible



LED
fixture



ICES
005



Energy Verified
Energie Vérifiée

For complete warranty details, please see our terms and conditions on our website

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE ⌚¹

Part number	DC Volts (VDC)	Nbr of faces	Light source	Input Volts (VAC)	Color
RMS0WH-IB	IB	Universal	LED	120/277/347	White
RMS0WH-UDC	UDC	Universal	LED	120/277/347	White

¹ **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

ORDERING GUIDE

Series	Nbr of faces	Color	DC Volts (VDC)	Options
RMS	0 - Universal faces 1 - Single face 2 - Double face	WH - White (standard) BK - Black GY - Grey SP - Custom color (please specify)	NDC - AC only UDC - Universal DC backup voltage from 6 to 24 IB - Self-powered for 90 minutes IB1 - Self-powered for 120 minutes CER - Cerebrum driver	AT¹, BO, K5, PGD, OP, TP, WO, WGD² 0 - No indicators (double face only) ↓ ↑ ↗ ↘ ↙ ↘ D U UR DR DL UL Note: Indicators option available for single & double option only.

¹ AT available with IB and IB1
² Specify mounting.

QUICK SHIP: Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanpro.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

EMERGENCY LIGHTING OPTIONS


Option	Description
AT¹	Automatic test Self-diagnostic
BO	Black Out Option (special wording)
K5	1/2" Knockout for pendant mount
OP	Special Wording
PGD	Lexan Guard (separate order)
TP	Tamper Proof Screws
WGD²	Wireguard (separate order)
WO	White Out Option (special wording)

WIREGUARD³

	Part number	Dimensions
Wall Mount	WGD520	14" x 10" x 4.75"
Ceiling Mount	WGD540	14.5" x 6.25" x 10.5"
End Mount	WGD650	13.75" x 12.25" x 16.5"

³ Please contact your STANPRO customer service representative for more information.

DIMENSIONS

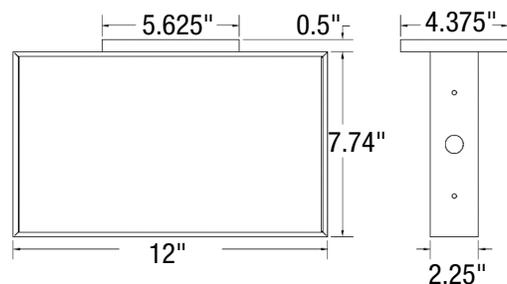

CONFIGURATIONS



Comes standard (single face) with three pictogram legends for direction selection.



Comes standard (double face) with two pictogram legends.



For double face no arrow options, select "No indicators" on the options column.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.