

PLASTIC EXIT

NRCan C860 Registered

LED 120/347VAC Input



Approvals:
CSA Certified to C22.2 #141.15 and C860

Energy Verified
Energie Vérifiée

DESCRIPTION

The SLEXP series of commercial plastic exit signs is designed using durable and lightweight high impact thermoplastic. Signs and canopy quick snap together for speedy installations. Available in AC only, AC/DC and internally self-powered versions.

CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 2.7W power consumption single or double face
- Emergency DC wattages as follows:
6VDC = 0.9W **12VDC** = 1.0W **24VDC** = 1.4W

CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 2.7W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger

Project: _____

Contractor: _____




quick
ship

MECHANICAL

- High impact, UV stabilized, thermoplastic construction
- Quick snap faceplates, backplate and universal canopy for rapid and simple installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- White colour is standard

DIMENSIONS

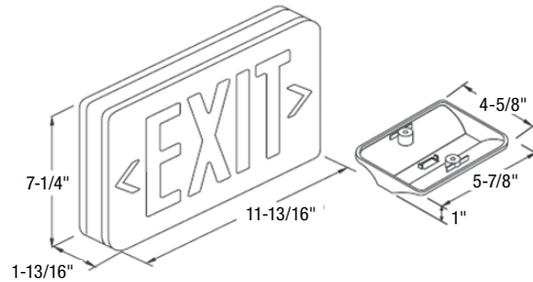

ORDERING GUIDE

| SLEXP | C | O | WH | — | / |
|--------|--------------------|---------------------|------------|--|---------|
| Series | Approval | Nbr of faces | Colour | DC Voltage | Options |
| SLEXP | C - C860 Certified | O - Universal faces | WH - White | NDC - AC only UDC - Universal DC backup voltage 6, 12 or 24VDC selectable IB - Self-powered for 90 minutes | WG*, PG |

† For detailed options descriptions, please consult the options page.

* Specify mounting.

QUICK SHIP: Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanprols.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.