

Series Spec Sheet

SLM-2L

MINIATURE LED PLASTIC BATTERY UNIT 120/277VAC

The SLM-2L series of battery units is designed using a flame retardant plastic enclosure and utilizes a quick connector for easy installation. The SLM-2L provides emergency light thanks to two fully adjustable glare-free shape light heads and offers a remote capacity for one dedicated remote (SRM2 only).

FEATURES AND SPECIFICATIONS

• Electrical Circuitry

- LED ultra-bright light source
- 120/277 VAC Input, field selectable
- Power consumption:
120V/0.06A/0.4W or 277V/0.07A/0.5W
- 3.6V maintenance free NI-CAD battery
- 90 minutes emergency lighting duration
- 3.6V 1W long life LED light source, 6000K
- Remote capacity for one dedicated remote (SRM2 only)

• Mechanical

- Injection molded thermoplastic housing
- Suitable for damp location
- Fully adjustable lamp holder location
- White color is standard
- Solid state transfer and battery charger
- Wall and ceiling mount installations

• Approvals

- Meets or exceeds CSA C22.2 #141-10



OVERVIEW

Light source	LED
Input voltage	120/277 VAC
Power consumption	120 V/0.06 A/0.4 W or 277 V/0.07 A/0.5 W

For complete warranty details, please see our terms and conditions on our website.



ORDERING GUIDE


SLM

Series

SLM-2L¹

¹ The SLM-2L series cannot be combined with other Stanpro products on the same emergency A.C. circuit.

DIMENSIONS

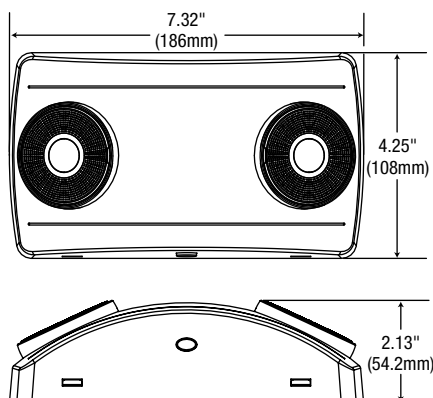

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.

Series Spec Sheet

SRM2

DEDICATED LED REMOTE

Fully adjustable LED glare free lens
only available with the SLM-2L

FEATURES

- LED ultra-bright light source: 3.6V 1W long life LED light source, 6000K
- Ceiling or wall mount installation
- Only available with SLM-2L
- Injection molded thermoplastic housing
- Suitable for damp location
- Fully adjustable lamp holder location
- White color is standard
- **Approvals**
 - Meets or exceeds CSA C22.2 #141-10



OVERVIEW

DC voltage	3.6 V
------------	-------

For complete warranty details, please see our terms and conditions on our website.




ORDERING GUIDE

SRM2

Series

SRM2

DIMENSIONS

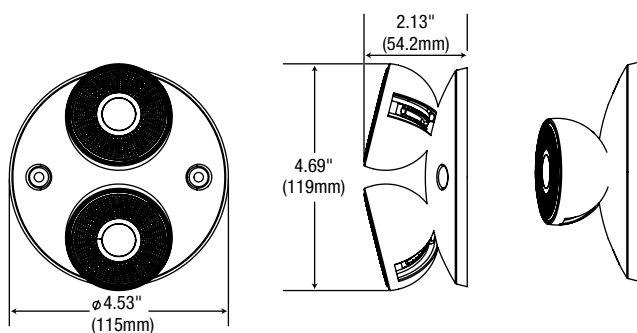

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.