



## — SHOWER FLOORS — SERIES WDA

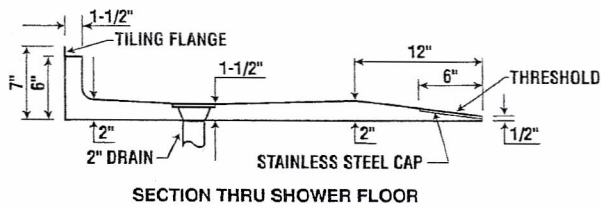

It is recommended that a floor drain at or near the entrance be included. These floors must be set on groutbed in order that floors be level.

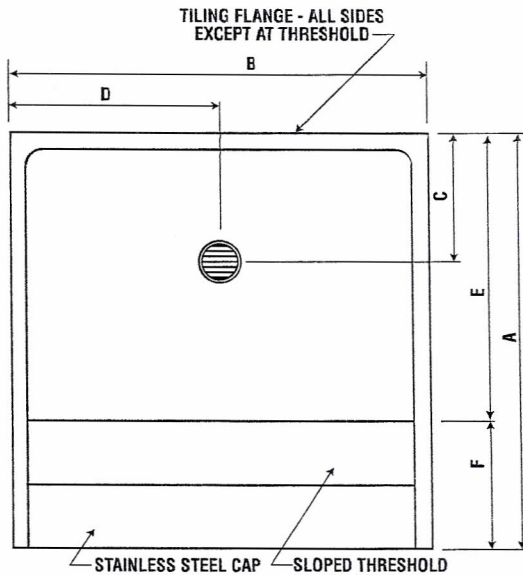


### TRANSFER TYPE WDA-3600 SERIES

| WDA-3600 |        |     |
|----------|--------|-----|
|          | IN     | MM  |
| A        | 39     | 990 |
| B        | 39     | 990 |
| C        | 12     | 305 |
| D        | 19-1/2 | 495 |
| E        | 27     | 685 |
| F        | 12     | 305 |

| WDA-3610 |    |      |
|----------|----|------|
|          | IN | MM   |
| A        | 30 | 760  |
| B        | 60 | 1525 |
| C        | 12 | 305  |
| D        | 30 | 760  |
| E        | 18 | 457  |
| F        | 12 | 305  |

| WDA-3620 |    |      |
|----------|----|------|
|          | IN | MM   |
| A        | 36 | 915  |
| B        | 60 | 1525 |
| C        | 12 | 305  |
| D        | 30 | 760  |
| E        | 24 | 610  |
| F        | 12 | 305  |

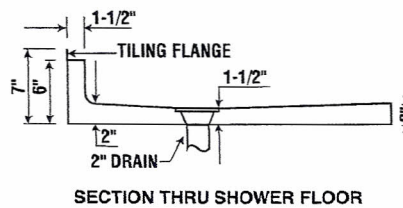


### ROLL-IN TYPE WDA-3400 SERIES

| WDA-3400 |        |     |
|----------|--------|-----|
|          | IN     | MM  |
| A        | 39     | 990 |
| B        | 39     | 990 |
| C        | 19-1/2 | 495 |
| D        | 19-1/2 | 495 |

| WDA-3410 |    |      |
|----------|----|------|
|          | IN | MM   |
| A        | 30 | 760  |
| B        | 60 | 1525 |
| C        | 15 | 305  |
| D        | 30 | 760  |

| WDA-3420 |    |      |
|----------|----|------|
|          | IN | MM   |
| A        | 36 | 915  |
| B        | 60 | 1525 |
| C        | 18 | 457  |
| D        | 30 | 760  |


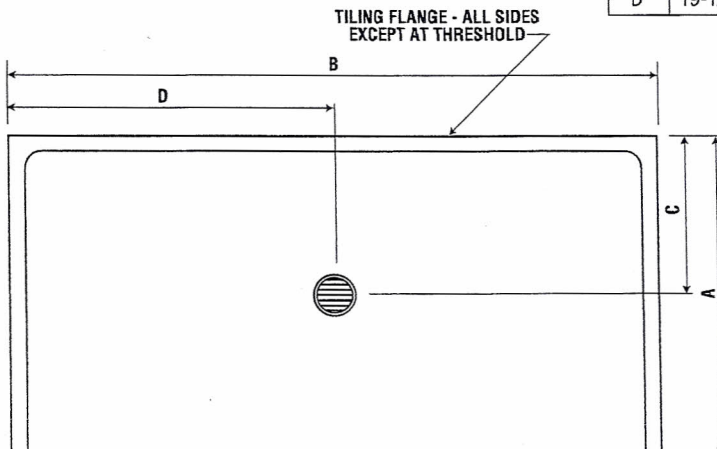


**Note:**

1. For Barrier-Free installation, contractor shall provide recess for curb.
2. All dimensions subject to manufacturing variance of plus or minus 1/4".

Note: All dimensions subject to manufacturing variance of plus or minus 1/4" (6 MM).

## — SHOWER FLOORS — SERIES WDA

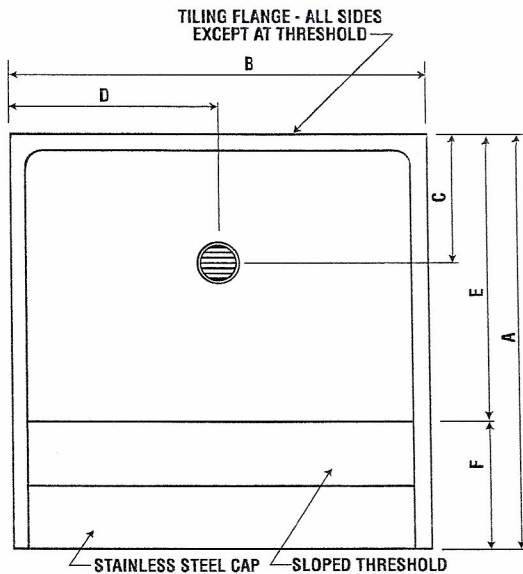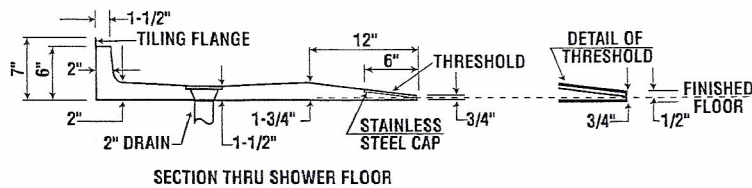

**Note:**



1. This style floor was designed to be set 1/4" deep from the top of the finished floor.
2. It is recommend that a floor drain at or near the entrance be included.
3. Collapsible water dam available (-RDM).

### TRANSFER TYPE WDA-3600 SERIES

| WDA-3605 |    |      |
|----------|----|------|
|          | IN | MM   |
| A        | 38 | 965  |
| B        | 40 | 1015 |
| C        | 12 | 305  |
| D        | 20 | 495  |
| E        | 26 | 685  |
| F        | 12 | 305  |

| WDA-3630 |    |      |
|----------|----|------|
|          | IN | MM   |
| A        | 32 | 813  |
| B        | 64 | 1626 |
| C        | 12 | 305  |
| D        | 32 | 813  |
| E        | 20 | 508  |
| F        | 12 | 305  |

| WDA-3660 |    |      |
|----------|----|------|
|          | IN | MM   |
| A        | 38 | 965  |
| B        | 64 | 1626 |
| C        | 12 | 305  |
| D        | 32 | 813  |
| E        | 26 | 660  |
| F        | 12 | 305  |

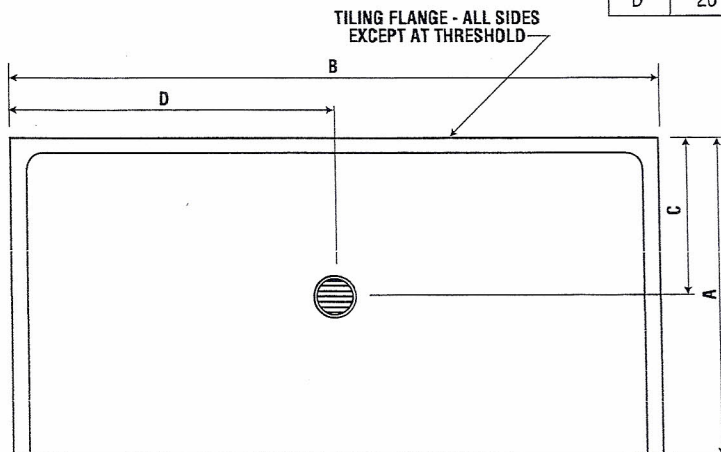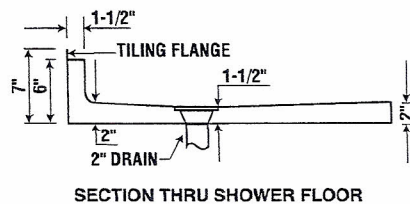

### ROLL-IN TYPE WDA-3400 SERIES

| WDA-3405 |    |      |
|----------|----|------|
|          | IN | MM   |
| A        | 38 | 965  |
| B        | 40 | 1015 |
| C        | 19 | 495  |
| D        | 20 | 495  |

| WDA-3430 |    |      |
|----------|----|------|
|          | IN | MM   |
| A        | 32 | 813  |
| B        | 64 | 1626 |
| C        | 16 | 406  |
| D        | 32 | 813  |

| WDA-3460 |    |      |
|----------|----|------|
|          | IN | MM   |
| A        | 38 | 965  |
| B        | 64 | 1626 |
| C        | 19 | 483  |
| D        | 32 | 813  |

**Note:**

1. For Barrier-Free installation, contractor shall provide recess for curb.
2. All dimensions subject to manufacturing variance of plus or minus 1/4".

Note: All dimensions subject to manufacturing variance of plus or minus 1/4" (6 MM).