


# #301 Malleable "C" Clamp

**Finish:** Bare Metal, Zinc Plated

**Material:** Ductile Iron \*c/w hardened steel cup point set screw

**Approvals:** Complies with MSS SP-58 and SP-69 (Type 23).  
(3/8" and 1/2") CUL, FM for 4" I.P. Max.

**Recommended:** Recommended for attachment to American Standard I-Beams and wide flange beams where thickness does not exceed 3/4"

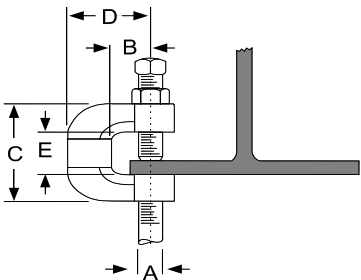

Maximum recommended set screw torque values per  
MSS SP-69.

Set Screw Size 3/8"-16  
Foot-Lbs 5  
Nm 7

(CARE SHOULD BE TAKEN NOT TO OVER TIGHTEN SET SCREW)

ROD SIZE A	SPECIFICATION DATA				PIPE SIZE	RECOM. MAX. LOAD (LBS)	APPR'X WT. PER 100 (LBS)	PC'S PER PKG.
	B	C	D	E				
3/8	5/8	1 3/4	1 7/16	3/4	1/2 to 2	350	31	100
1/2	5/8	1 3/4	1 7/16	3/4	2 1/2 to 3 1/2	500	32	100
5/8	5/8	1 29/32	1 13/32	3/4	4 to 5	550	42	50
3/4	5/8	2 1/16	1 1/2	3/4	6	630	51	50



QWI 4.3.1 Issue Date Jul/21 Rev.7

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at [www.taylorassociates.com](http://www.taylorassociates.com)

For more information, please contact Customer Service at 1-800-263-8652