


**Finishes** Epoxy Copper-Gard c/w Zinc Hardware

**Materials** Malleable Iron

**Approvals** Complies with MSS SP-58 and SP-69 (Type 12).

**Recommended** Recommended for the suspension of non-insulated stationary copper tubing.

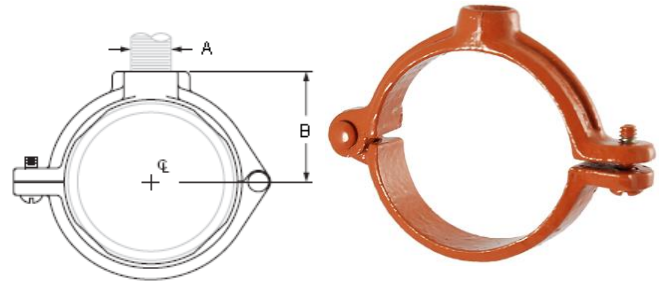

COPPER TUBE SIZE	SPECIFICATION DATA		REC. MAX LOAD (LBS)	APP'X WT. PER 100 (LBS)	PC'S PER PKG.
	ROD SIZE A	B			
3/8	3/8	13/16	180	10	100
1/2	3/8	13/16	180	10	100
3/4	3/8	7/8	180	13	100
1	3/8	1	180	14	100
1 1/4	3/8	1 1/8	180	16	100
1 1/2	3/8	1 5/16	180	22	50
2	3/8	1 11/16	180	31	50
2 1/2	1/2	2 1/8	300	60	50
3	1/2	2 7/16	300	74	50
4	1/2	2 3/4	300	85	25

QWI 4.3.1 Issue Date Dec/18 Rev.6

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at [www.taylorpipesupports.ca](http://www.taylorpipesupports.ca)

For more information, please contact Customer Service at 1-800-263-8652