


Finishes Zinc Plated

Materials Malleable Iron
See #38RSS for Stainless Steel Specifications

Approvals Complies with MSS SP-58 and SP-69 (Type 12).

Recommended Recommended for the suspension of non-insulated stationary pipe.

Maximum temperature: 450°F

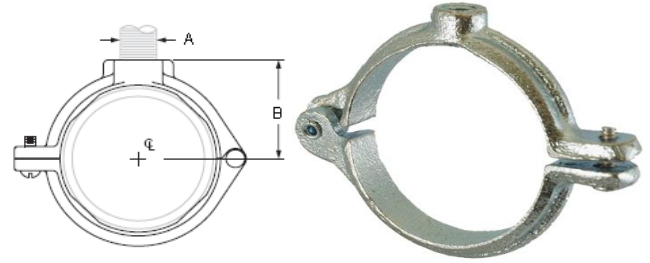

| IRON PIPE SIZE | SPECIFICATION DATA | | REC. MAX. LOAD (LBS) | APP'X WT. PER 100 (LBS) | PC'S PER PKG. |
|----------------------|--------------------|---------|----------------------------|-------------------------------|---------------------|
| | ROD SIZE A | B | | | |
| 3/8 | 3/8 | 13/16 | 180 | 9 | 100 |
| 1/2 | 3/8 | 7/8 | 180 | 9 | 100 |
| 3/4 | 3/8 | 1 | 180 | 11 | 100 |
| 1 | 3/8 | 1 1/8 | 180 | 14 | 100 |
| 1 1/4 | 3/8 | 1 5/16 | 180 | 18 | 50 |
| 1 1/2 | 3/8 | 1 7/16 | 180 | 22 | 50 |
| 2 | 3/8 | 1 11/16 | 180 | 26 | 50 |
| 2 1/2 | 1/2 | 2 1/8 | 300 | 44 | 25 |
| 3 | 1/2 | 2 7/16 | 300 | 51 | 25 |
| 4 | 1/2 | 2 3/4 | 300 | 71 | 25 |

QWI 4.3.1 Issue Date Dec/18 Rev.6

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorpipesupports.ca

For more information, please contact Customer Service at 1-800-263-8652